
Discrete dynamics

Release 10.5.rc0

The Sage Development Team

Nov 16, 2024

CONTENTS

1 Cellular Automata	1
2 Plotting of Mandelbrot and Julia Sets	29
3 Discrete dynamical systems	35
4 Sandpiles	49
5 Arithmetic Dynamical Systems	103
6 Indices and Tables	249
Python Module Index	251
Index	253

CHAPTER
ONE

CELLULAR AUTOMATA

1.1 Catalog of Cellular Automata

The `cellular_automata` object may be used to access examples of various cellular automata currently implemented in Sage. Using tab-completion on this object is an easy way to discover and quickly create the cellular automata that are available (as listed here).

Let `<tab>` indicate pressing the Tab key. So begin by typing `cellular_automata.<tab>` to see the currently implemented named cellular automata.

- `cellular_automata.Elementary`
- `cellular_automata.GraftalLace`
- `cellular_automata.PeriodicSoliton`
- `cellular_automata.Soliton`

1.2 Elementary Cellular Automata

AUTHORS:

- Travis Scrimshaw (2018-07-07): Initial version

```
class sage.dynamics.cellular_automata.elementary.ElementaryCellularAutomata(rule,
width=None,
initial_state=None,
boundary=(0,0))
```

Bases: `SageObject`

Elementary cellular automata.

An *elementary cellular automaton* is a 1-dimensional cellular deterministic automaton with two possible values: $X := \{0, 1\}$. A *state* is therefore a sequence $s \in X^n$, and the *evolution* of a state $s \rightarrow s'$ is given for s'_i by looking at the values at positions s_{i-1}, s_i, s_{i+1} and is determined by the *rule* $0 \leq r \leq 255$ as follows. Consider the binary representation $r = b_7b_6b_5b_4b_3b_2b_1b_0$. Then, we define $s'_i = b_j$, where $j = s_{i-1}s_is_{i+1}$ is the corresponding binary representation. In other words, the value s'_i is given according to the following table:

111	110	101	100	011	010	001	000
b_7	b_6	b_5	b_4	b_3	b_2	b_1	b_0

We consider the boundary values of $s_0 = s_{n+1} = 0$.

INPUT:

- rule – integer between 0 and 255
- width – (optional) the width of the ECA
- initial_state – (optional) the initial state given as a list of 0 and 1
- boundary – (default: `(0, 0)`) a tuple of the left and right boundary conditions respectively or `None` for periodic boundary conditions

Either `width` or `initial_state` must be given. If `width` is less than the length of `initial_state`, then `initial_state` has 0 prepended so the resulting list has length `width`. If only `width` is given, then the initial state is constructed randomly.

The boundary conditions can either be 0, 1, or a function that takes an integer `n` corresponding to the state and outputs either 0 or 1.

EXAMPLES:

We construct an example with rule $r = 90$ using $n = 20$. The initial state consists of a single 1 in the rightmost entry:

```
sage: ECA = cellular_automata.Elementary(90, width=20, initial_state=[1])
sage: ECA.evolve(20)
sage: ascii_art(ECA)
      X
      X
      X X
      X
      X X
      X   X
      X X X X
      X
      X X
      X   X
      X X X X
      X       X
      X X     X X
      X   X   X   X
      X X X X X X X X
      X
      X X
      X   X
      X X X X
      X       X
      X X
```

We now construct it with different boundary conditions. The first is with the left boundary being 1 (instead of 0):

```
sage: ECA = cellular_automata.Elementary(90, width=20, initial_state=[1], ↴
boundary=(1,0))
sage: ECA.evolve(20)
sage: ascii_art(ECA)
      X
      X
      X X
      X
      X X
      X   X
      X X X X
      X
      X X
      X   X
      X X X X
      X       X
      X X     X X
      X   X   X   X
      X X X X X X X X
      X
      X X
      X   X
      X X X X
      X       X
      X X
```

(continues on next page)

(continued from previous page)

```

X XX          X   X
XXX          X X X X
X XX XX      X
X XX XXX     X X
X XX X XX X  X
X XX   XX   X X X
X XXXX XXXXX  X
X X X X   XX   X X
X       X XXXX X   X
XX   X X   X X X X X
XX   X XX XX XX
XXXX  XX XX XXX
X  XXXXXX XX X XX
XXX   X XX   XXX
XXX XX X   XXX XX XX
X XX   XXXX X XX XXX

```

Now we consider the right boundary as being 1 on every third value:

```

sage: def rbdry(n): return 1 if n % 3 == 0 else 0
sage: ECA = cellular_automata.Elementary(90, width=20, initial_state=[1], ↴
boundary=(0,rbdry))
sage: ECA.evolve(20)
sage: ascii_art(ECA)
          X
          X
          X X
          X X
         X XX
         X XXX
         X XXXX
         X X XX
         X XX XXX
         X XXXXX
         X XXXX XX
         X X XX XXXX
         X XX XX X
         X XXXXXX X
         X XXXX XXX X
         X X XX XX X
         X XX XXXXXX X
         X XXXXX XXX X
         X XXXX XX X X
         X X XX XXXXXXX X
         X XX   X X X X
         X XX   XXXXXX X
         X XX   XXXXX X
         X XX X   XXX X

```

Lastly we consider it with periodic boundary condition:

```

sage: ECA = cellular_automata.Elementary(90, width=20, initial_state=[1], ↴
boundary=None)
sage: ECA.evolve(20)
sage: ascii_art(ECA)
          X
          X
          X X
          X X

```

(continues on next page)

(continued from previous page)

```

X X      X X
X X      X X
X X X X   X X X X
X   X
X X X X
X       X
X X   X X
X   X   X X
X X X X X X X X
X           X
X X           X X
X           X
X X           X X
X   X           X X
X X X X   X X X X
X   X

```

We show the local evolution rules for rule 110:

```

sage: for t in cartesian_product([[0,1],[0,1],[0,1]]):
....:     ECA = cellular_automata.Elementary(110, list(t))
....:     ECA.print_states(2)
....:     print('#')

#
X
XX
#
X
XX
#
XX
XXX
#
X
X
#
X X
XXX
#
XX
XX
#
XXX
X X
#

```

We construct an elementary cellular automaton with a random initial state with $n = 15$ and see the state after 50 evolutions:


```

sage: ECA = cellular_automata.Elementary(26, width=25)
sage: ECA.print_state(50)  # random
X X   X   X X X

```

We construct and plot a larger example with rule 60:

```
sage: ECA = cellular_automata.Elementary(60, width=200)
sage: ECA.evolve(200)
sage: ECA.plot()
needs sage.plot
Graphics object consisting of 1 graphics primitive
```

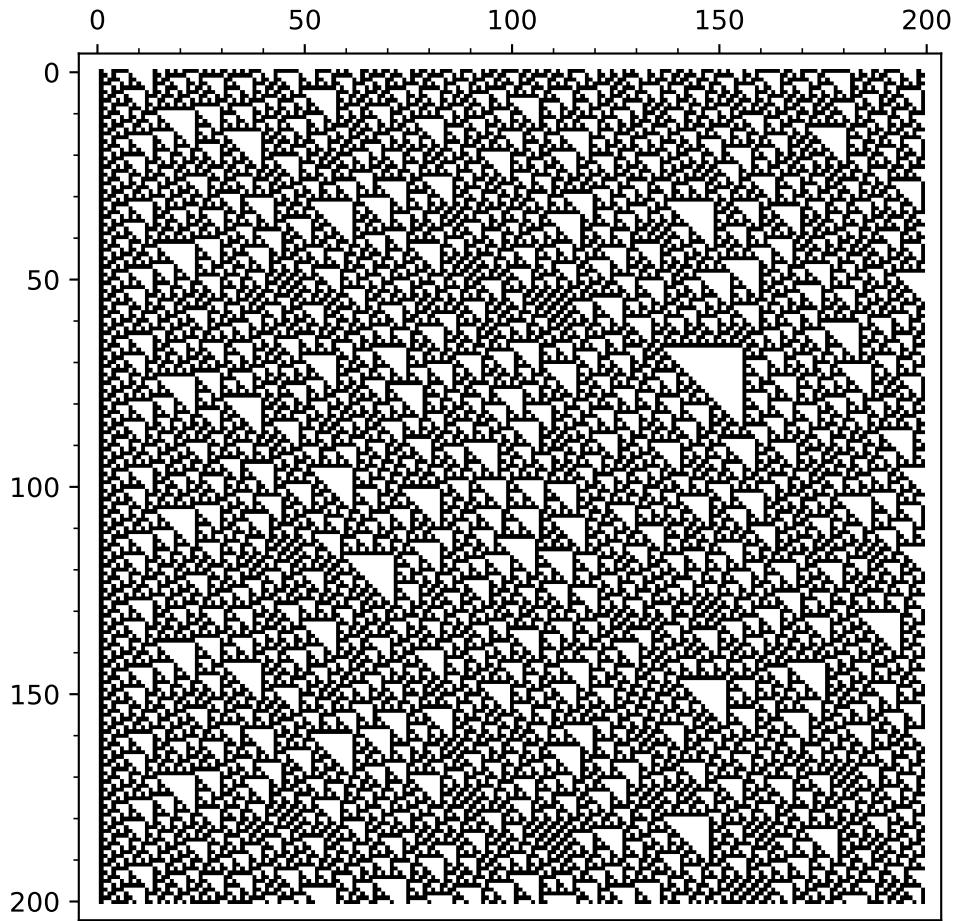

With periodic boundary condition for rule 90:

```
sage: ECA = cellular_automata.Elementary(90, initial_state=[1]+[0]*254+[1], boundary=None)
sage: ECA.evolve(256)
sage: ECA.plot()
needs sage.plot
Graphics object consisting of 1 graphics primitive
```

REFERENCES:

[Wikipedia article Elementary_cellular_automaton](#)


evolve (*number=None*)

Evolve self.

INPUT:

- *number* – (optional) the number of times to perform the evolution

EXAMPLES:

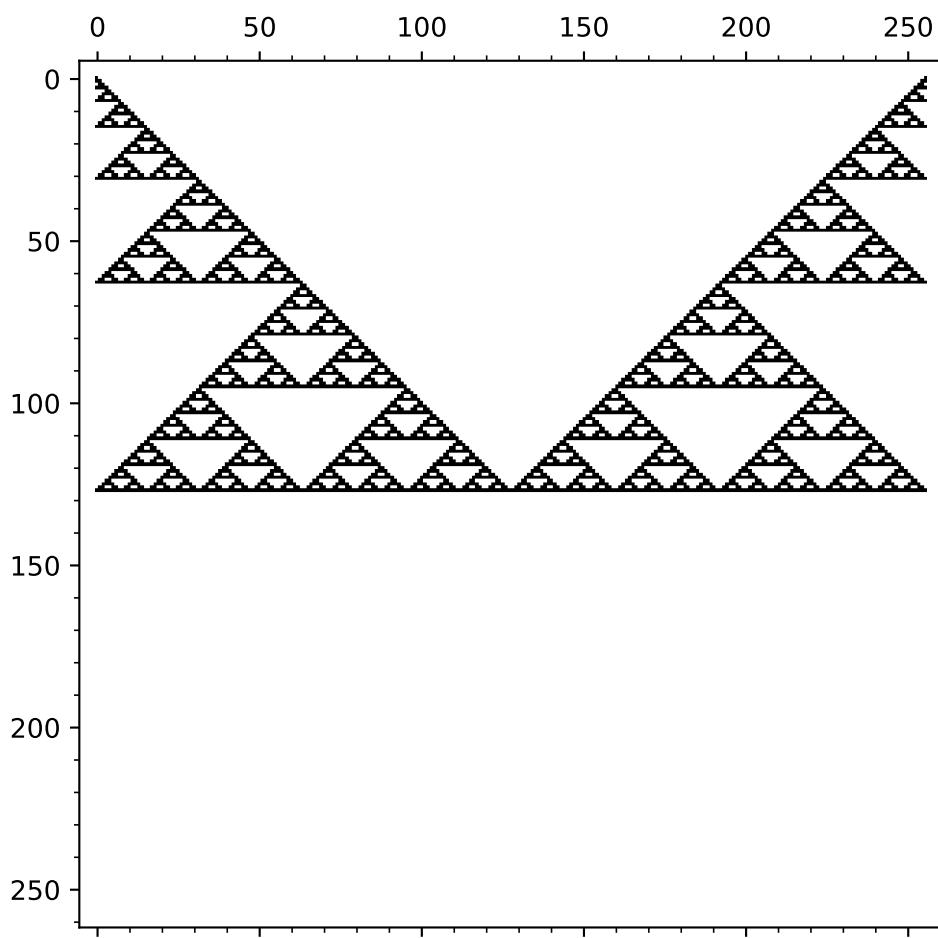

```
sage: ECA = cellular_automata.Elementary(110, [1,0,0,1,1,0,0,1,0,1])
sage: ascii_art(ECA)
X  XX  X  X
sage: ECA.evolve()
sage: ascii_art(ECA)
X  XX  X  X
X  XXX  XXXX
sage: ECA.evolve(10)
sage: ascii_art(ECA)
X  XX  X  X
X  XXX  XXXX
XXX  XXX  X
X  XXX  X  XX
XXX  XXXXXX
X  XXX  X
XXX  X  XX
X  XXX  XXX
XXX  X  XX  X
X  XXXXXXXXX
XXX  X
X  X  XX
```

plot (number=None)

Return a plot of self.

INPUT:

- number – the number of states to plot

EXAMPLES:

```
sage: ECA = cellular_automata.Elementary(110, width=256)
sage: ECA.evolve(256)
sage: ECA.plot() #_
→needs sage.plot
Graphics object consisting of 1 graphics primitive
```

print_state (number=None)

Print the state number.

INPUT:

- number – (default: the current state) the state to print

EXAMPLES:

```
sage: ECA = cellular_automata.Elementary(110, width=10,
....:                                         initial_state=[1,0,0,1,1,0,1])
sage: ECA.print_state(15)
X  X  XXXXX
sage: ECA.print_state(10)
X  X  XX
sage: ECA.print_state(20)
X  XXX
sage: for i in range(11):
....:     ECA.print_state(i)
      X  XX  X
      XX  XXXXX
      XXXXX  X
```

(continues on next page)

(continued from previous page)

```

XX      X  XX
XX  XX  XXX
XX  XXXXX  X
XXXX   XXX
X  X  XX  X
X  XX  XXXXX
XXXXXX   X
X      X  XX

```

print_states (number=None)

Print the first num states of self.

Note

If the number of states computed for self is less than num, then this evolves the system using the default time evolution.

INPUT:

- number – the number of states to print

EXAMPLES:

```

sage: ECA = cellular_automata.Elementary(110, width=10,
....:                                         initial_state=[1,0,0,1,1,0,1])
sage: ECA.print_states(10)
X  XX  X
XX  XXXXX
XXXX  X
XX  X  XX
XX  XX  XXX
XX  XXXXX  X
XXXX  XXX
X  X  XX  X
X  XX  XXXXX
XXXXXX  X

```

1.3 Graftal Lace Cellular Automata

AUTHORS:

- Travis Scrimshaw (2020-04-30): Initial version

class sage.dynamics.cellular_automata.glca.**GraftalLaceCellularAutomata**(rule)

Bases: SageObject

Graftal Lace Cellular Automata (GLCA).

A GLCA is a deterministic cellular automaton whose rule is given by an 8-digit octal number $r_7 \dots r_0$. For a node s_i , let b_k , for $k = -1, 0, 1$ denote if there is an edge from s_i to s'_{i+k} , where s'_j is the previous row. We determine the value at t_{i+k} by considering the value of r_m , where the binary representation of m is $b_{-1}b_0b_1$. If r_m has a binary representation of $b'_1 b'_0 b'_{-1}$, then we add b'_k to t_{i+k} .

INPUT:

- `rule` – list of length 8 with integer entries $0 \leq x < 8$

EXAMPLES:

```
sage: G = cellular_automata.GraftalLace([0,2,5,4,7,2,3,3])
sage: G.evolve(3)
sage: ascii_art(G)
  o
  |
  o
  |
  o o o
 /| |/
 o o o o o
 /| |/\|/
o o o o o o o

sage: G = cellular_automata.GraftalLace([3,0,3,4,7,6,3,1])
sage: G.evolve(3)
sage: ascii_art(G)
  o
  |
  o
  |
  o o o
 / | \ \
o o o o o
/|/ | \ \ \
o o o o o o o

sage: G = cellular_automata.GraftalLace([2,0,3,3,6,0,2,7])
sage: G.evolve(20)
sage: G.plot() #_
˓needs sage.plot
Graphics object consisting of 842 graphics primitives
```

REFERENCES:

- [Kas2018]

evolve (*number=None*)

Evolve self.


INPUT:

- `number` – (default: 1) the number of times to perform the evolution

EXAMPLES:

```
sage: G = cellular_automata.GraftalLace([5,1,2,5,4,5,5,0])
sage: ascii_art(G)
  o
  |
  o
sage: G.evolve(2)
sage: ascii_art(G)
  o
  |
  o
  /
  \
```

(continues on next page)

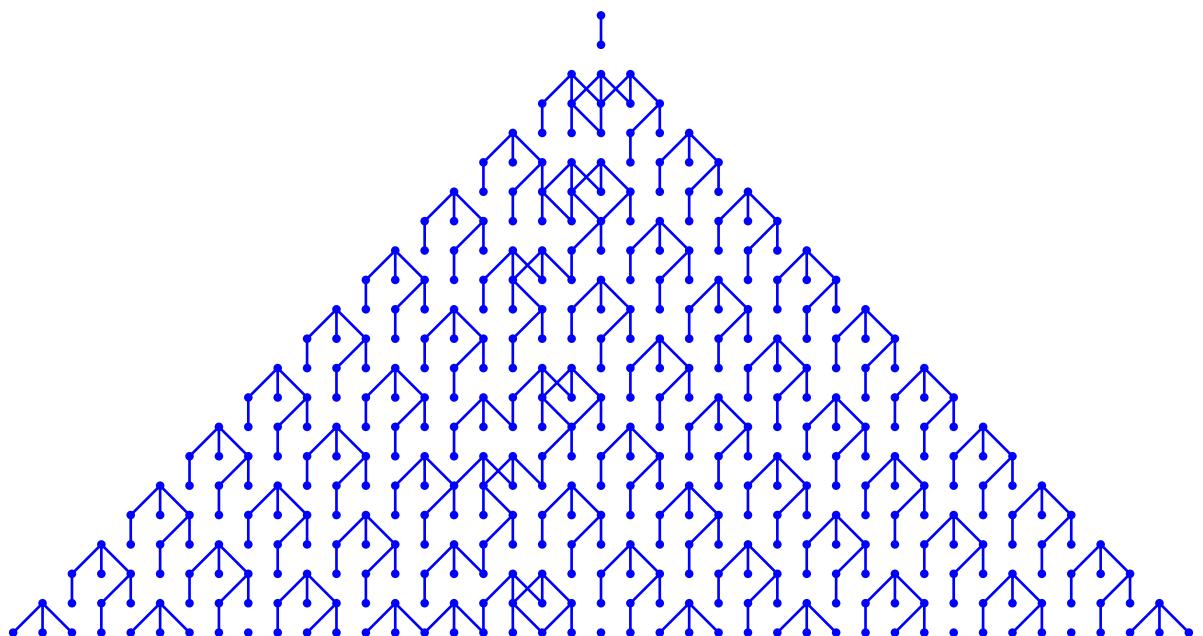

(continued from previous page)

```

o o o
/ \ / \
o o o o o

```

```

sage: G = cellular_automata.GraftalLace([0,2,1,4,7,2,3,0])
sage: G.evolve(3)
sage: ascii_art(G)
o
|
o
|
o o o
|
o o o o o
|
o o o o o o o

```

plot (number=None)Return a plot of `self`.

INPUT:

- `number` – the number of states to plot

EXAMPLES:

```

sage: G = cellular_automata.GraftalLace([5,1,2,5,4,5,5,0])
sage: G.evolve(20)
sage: G.plot()
# needs sage.plot
Graphics object consisting of 865 graphics primitives

```

print_states (number=None, use_unicode=False)Print the first `num` states of `self`.**Note**

If the number of states computed for `self` is less than `num`, then this evolves the system using the default time evolution.

INPUT:

- `number` – the number of states to print

EXAMPLES:

```

sage: G = cellular_automata.GraftalLace([5,1,2,5,4,5,5,0])
sage: G.evolve(2)
sage: G.print_states()
o
|
o
/
\ \
o o o
/ \ / \
o o o o o

```

(continues on next page)

(continued from previous page)

```
sage: G.evolve(20)
sage: G.print_states(3)
  o
  |
  o
 / \
o  o  o
 / \ / \
o  o  o  o
```

1.4 Soliton Cellular Automata

AUTHORS:

- Travis Scrimshaw (2017-06-30): Initial version
- Travis Scrimshaw (2018-02-03): Periodic version

```
class sage.dynamics.cellular_automata.solitons.PeriodicSolitonCellularAutomata(initial_state, cartan_type=2, vacuum=1)
```

Bases: *SolitonCellularAutomata*

A periodic soliton cellular automata.

Fix some $r \in I_0$. A *periodic soliton cellular automata* is a *SolitonCellularAutomata* with a state being a fixed number of tensor factors $p = p_\ell \otimes \cdots \otimes p_1 \otimes p_0$ and the *time evolution* T_s is defined by

$$R(p \otimes u) = u \otimes T_s(p),$$

for some element $u \in B^{r,s}$.

INPUT:

- `initial_state` – the list of elements, can also be a string when `vacuum` is 1 and `n` is \mathfrak{sl}_n
- `cartan_type` – (default: 2) the value `n`, for \mathfrak{sl}_n , or a Cartan type
- `r` – (default: 1) the node index r ; typically this corresponds to the height of the vacuum element

EXAMPLES:

The construction and usage is the same as for *SolitonCellularAutomata*:

```
sage: P = PeriodicSolitonCellularAutomata('1123334111241111423111411123112', 4)
sage: P.evolve()
sage: P
Soliton cellular automata of type ['A', 3, 1] and vacuum = 1
initial state:
..23334...24....423....4....23..2
evolutions: [(1, 31)]
current state:
34.....24....243....4.223.233.
sage: P.evolve(carrier_capacity=2)
```

(continues on next page)

(continued from previous page)

```
sage: P.evolve(carrier_index=2)
sage: P.evolve(carrier_index=2, carrier_capacity=3)
sage: P.print_states(10)
t: 0
..23334...24....423...4...23..2
t: 1
34.....24....243....4.223.233.
t: 2
.....24....24.3....4223.2333.4
t: 3
.....34....34.2..223234.24...3.
t: 4
....34...23..242223.4..33....4.
t: 5
..34.2223.224.3....4.33.....4..
t: 6
34223...24...3....433.....4.22
t: 7
23....24....3....343....222434..
t: 8
....24.....3..34.322244...3..23
t: 9
..24.....332442342.....3.23..
```

Using $r = 2$ in type $A_3^{(1)}$:

```
sage: initial = [[2,1],[2,1],[4,1],[2,1],[2,1],[2,1],[3,1],[3,1],[3,2]]
sage: P = PeriodicSolitonCellularAutomata(initial, 4, 2)
sage: P.print_states(10)
t: 0 4 333
..1...112
t: 1 4 333
.1.112...
t: 2 433 3
112.....1
t: 3 3 334
2....111.
t: 4 334 3
..111....2
t: 5 34 33
11.....21
t: 6 3334
....1121.
t: 7 333 4
.112..1..
t: 8 3 4 33
2....1.11
t: 9 3433
...112..
```

We do some examples in other types:

```
sage: initial = [[1],[2],[2],[1],[1],[1],[3],[1],['E'],[1],[1]]
sage: P = PeriodicSolitonCellularAutomata(initial, ['D',4,3])
sage: P.print_states(10)
t: 0
.22...3.E..
```

(continues on next page)

(continued from previous page)

```

t: 1
    2....3.E..2
t: 2
    ....3.E.22.
t: 3
    ...3.E22...
t: 4
    ..32E2.....
t: 5
    .00.2.....
t: 6 _
    22.2.....
t: 7
    2.2.....3E
t: 8
    .2.....30.2
t: 9
    2.....332.2.

sage: P = PeriodicSolitonCellularAutomata([[3],[2],[1],[1],[-2]], ['C',2,1])
sage: P.print_state_evolution(0)
      3      2      1      1      -2
  - |      |      |      |      |
11112 ---+--- 11112 ---+--- 11111 ---+--- 11112 ---+--- 11122 ---+--- 11112
      |      |      |      |      |
      2      1     -2     -2      1

```

REFERENCES:

- [KTT2006]
- [KS2006]
- [YT2002]
- [YYT2003]

evolve (*carrier_capacity=None*, *carrier_index=None*, *number=None*)Evolve `self`.Time evolution T_s of a SCA state p is determined by

$$u \otimes T_s(p) = R(p \otimes u),$$

where u is some element in $B^{r,s}$.

INPUT:

- `carrier_capacity` – (default: the number of balls in the system) the size s of carrier
- `carrier_index` – (default: the vacuum index) the index r of the carrier
- `number` – (optional) the number of times to perform the evolutions

To perform multiple evolutions of the SCA, `carrier_capacity` and `carrier_index` may be lists of the same length.**Warning**

Time evolution is only guaranteed to result in a solution when the `carrier_index` is the defining r of the SCA. If no solution is found, then this will raise an error.

EXAMPLES:

```
sage: P = PeriodicSolitonCellularAutomata('12411133214131221122', 4)
sage: P.evolve()
sage: P.print_state(0)
.24...332.4.3.22..22
sage: P.print_state(1)
4...33.2.42322..22..
sage: P.evolve(carrier_capacity=2)
sage: P.print_state(2)
..33.22.4232..22...4
sage: P.evolve(carrier_capacity=[1, 3, 1, 2])
sage: P.evolve(1, number=3)
sage: P.print_states(10)
t: 0
    .24...332.4.3.22..22
t: 1
    4...33.2.42322..22..
t: 2
    ..33.22.4232..22...4
t: 3
    .33.22.4232..22...4.
t: 4
    3222..43.2.22....4.3
t: 5
    222..43.2.22....4.33
t: 6
    2...4322.2.....43322
t: 7
    ...4322.2.....433222
t: 8
    ..4322.2.....433222.
t: 9
    .4322.2.....433222..

sage: P = PeriodicSolitonCellularAutomata('12411132121', 4)
sage: P.evolve(carrier_index=2, carrier_capacity=3)
sage: P.state_evolution(0)
[[[1, 1, 1], [2, 2, 4]],
 [[1, 1, 2], [2, 2, 4]],
 [[1, 1, 3], [2, 2, 4]],
 [[1, 1, 1], [2, 2, 3]],
 [[1, 1, 1], [2, 2, 3]],
 [[1, 1, 1], [2, 2, 3]],
 [[1, 1, 2], [2, 2, 3]],
 [[1, 1, 1], [2, 2, 2]],
 [[1, 1, 1], [2, 2, 2]],
 [[1, 1, 1], [2, 2, 2]],
 [[1, 1, 1], [2, 2, 4]],
 [[1, 1, 1], [2, 2, 4]]]
```

```
class sage.dynamics.cellular_automata.solitons.SolitonCellularAutomata(initial_state, cartan_type=2, vacuum=1)
```

Bases: SageObject

Soliton cellular automata.

Fix an affine Lie algebra \mathfrak{g} with index I and classical index set I_0 . Fix some $r \in I_0$. A *soliton cellular automaton* (SCA) is a discrete (non-linear) dynamical system given as follows. The *states* are given by elements of a semi-infinite tensor product of Kirillov-Reshetikhkin crystals $B^{r,1}$, where only a finite number of factors are not the maximal element u , which we will call the *vacuum*. The *time evolution* T_s is defined by

$$R(p \otimes u_s) = u_s \otimes T_s(p),$$

where $p = \cdots \otimes p_3 \otimes p_2 \otimes p_1 \otimes p_0$ is a state and u_s is the maximal element of $B^{r,s}$. In more detail, we have $R(p_i \otimes u^{(i)}) = u^{(i+1)} \otimes \tilde{p}_i$ with $u^{(0)} = u_s$ and $T_s(p) = \cdots \otimes \tilde{p}_1 \otimes \tilde{p}_0$. This is well-defined since $R(u \otimes u_s) = u_s \otimes u$ and $u^{(k)} = u_s$ for all $k \gg 1$.

INPUT:

- `initial_state` – the list of elements, can also be a string when `vacuum` is 1 and `n` is \mathfrak{sl}_n
- `cartan_type` – (default: 2) the value `n`, for \mathfrak{sl}_n , or a Cartan type
- `r` – (default: 1) the node index r ; typically this corresponds to the height of the vacuum element

EXAMPLES:

We first create an example in \mathfrak{sl}_4 (type A_3):

```
sage: B = SolitonCellularAutomata('341111122411112223', 4)
sage: B
Soliton cellular automata of type ['A', 3, 1] and vacuum = 1
initial state:
34.....224....2223
evolutions: []
current state:
34.....224....2223
```

We then apply a standard evolution:

```
sage: B.evolve()
sage: B
Soliton cellular automata of type ['A', 3, 1] and vacuum = 1
initial state:
34.....224....2223
evolutions: [(1, 19)]
current state:
.....34.....224...2223....
```

Next, we apply a smaller carrier evolution. Note that the soliton of size 4 moves only 3 steps:

```
sage: B.evolve(3)
sage: B
Soliton cellular automata of type ['A', 3, 1] and vacuum = 1
initial state:
```

(continues on next page)

(continued from previous page)

```
34.....224....2223
evoltuions: [(1, 19), (1, 3)]
current state:
.....34....224...2223.....
```

We can also use carriers corresponding to non-vacuum indices. In these cases, the carrier might not return to its initial state, which results in a message being displayed about the resulting state of the carrier:

```
sage: B.evolve(carrier_capacity=7, carrier_index=3)
Last carrier:
1 1 1 1 1 1 1
2 2 2 2 2 3 3
3 3 3 3 3 4 4
sage: B
Soliton cellular automata of type ['A', 3, 1] and vacuum = 1
initial state:
34.....224....2223
evoltuions: [(1, 19), (1, 3), (3, 7)]
current state:
.....23....222....2223.....
```



```
sage: B.evolve(carrier_capacity=3, carrier_index=2)
Last carrier:
1 1 1
2 2 3
sage: B
Soliton cellular automata of type ['A', 3, 1] and vacuum = 1
initial state:
34.....224....2223
evoltuions: [(1, 19), (1, 3), (3, 7), (2, 3)]
current state:
.....22....223....2222.....
```

To summarize our current evolutions, we can use `print_states()`:

```
sage: B.print_states(5)
t: 0
.....34.....224....2223
t: 1
.....34.....224....2223...
t: 2
.....34....224....2223.....
t: 3
.....23....222....2223.....
```

To run the SCA further under the standard evolutions, one can use `print_states()` or `latex_states()`:

```
sage: B.print_states(15)
t: 0
.....34.....224....2223
t: 1
.....34.....224....2223....
t: 2
.....34....224....2223.....
t: 3
```

(continues on next page)

(continued from previous page)

```
t: 4 .....23....222....2223.....
t: 5 .....22....223....2222.....
t: 6 .....22....223..2222.....
t: 7 .....2222..23...222.....
t: 8 .....2222....23..222.....
t: 9 .....2222.....23.222.....
t: 10 .....2222.....223.22.....
t: 11 .....2222.....223..22.....
t: 12 .....2222.....223...22.....
t: 13 .....2222.....223....22.....
t: 14 .....2222.....223....22.....
```

Next, we use $r = 2$ in type A_3 . Here, we give the data as lists of values corresponding to the entries of the column of height 2 from the largest entry to smallest. Our columns are drawn in French convention:

```
sage: B = SolitonCellularAutomata([[4,1],[4,1],[2,1],[2,1],[2,1],[2,1],[3,1],[3,-1],[3,2]], 4, 2)
```

We perform 3 evolutions and obtain the following:

```
sage: B.evolve(number=3)
sage: B
Soliton cellular automata of type ['A', 3, 1] and vacuum = 2
initial state:
44      333
11.....112
evolutions: [(2, 9), (2, 9), (2, 9)]
current state:
44 333
...11.112.....
```

We construct Example 2.9 from [LS2017]:

```
sage: B = SolitonCellularAutomata([[2],[-3],[1],[1],[1],[4],[0],[-2],
....: [1],[1],[1],[3],[-4],[-3],[-3],[1]], ['D',5,2])
sage: B.print_states(10)
t: 0 .....23....402....3433.
t: 1 .....23..402....3433.....
t: 2 .....23.402..3433.....
t: 3 .....243.02.3433.....
t: 4 .....- - -
```

(continues on next page)

(continued from previous page)

```

.....2403..42333.....
t: 5 .....2403_ _44243.....
t: 6 .....2403_ _442_43.....
t: 7 .....2403_ _442..43.....
t: 8 .....2403.....442..43.....
t: 9 ...2403.....442....43.....

```

Example 3.4 from [LS2017]:

```

sage: B = SolitonCellularAutomata([[E],[1],[1],[1],[3],[0],
....: [1],[1],[1],[1],[2],[-3],[-1],[1], [D,4,2]])
sage: B.print_states(10)
t: 0 .....E...30....231.
t: 1 .....E..30..231....
t: 2 .....E303_21.....
t: 3 .....303E2..22.....
t: 4 .....303E....22.....
t: 5 .....303E.....12.....
t: 6 .....303E.....1..2.....
t: 7 .....303E.....1..2.....
t: 8 .....303E.....1..2.....
t: 9 .....303E.....1....2.....

```

Example 3.12 from [LS2017]:

```

sage: B = SolitonCellularAutomata([-1,3,2],[3,2,1],[3,2,1],[-3,2,1],
....: [-2,-3,1]], [B',3,1], 3)
sage: B.print_states(6)
t: 0 .....-1.....-3-2
.....3.....2-3
.....2 .. . 1 1
.....-1-3-2
t: 1 .....3 2-3
.....2 1 1 . .
.....-3-1
t: 2 .....2-2
.....1-3 . . . .
.....-3-1 -3
t: 3 .....2-2 2
.....1 3 . 1 . . . .
.....-3-1 -3
t: 4 .....2-2 2

```

(continues on next page)

(continued from previous page)

```

. . . . . 1 3 . . . 1 . . . . .
-3-1           -3
t: 5          2-2          2
. . . 1 3 . . . . 1 . . . . .

```

Example 4.12 from [LS2017]:

```

sage: K = crystals.KirillovReshetikhin(['E', 6, 1], 1, 1, 'KR')
sage: u = K.module_generators[0]
sage: x = u.f_string([1, 3, 4, 5])
sage: y = u.f_string([1, 3, 4, 2, 5, 6])
sage: a = u.f_string([1, 3, 4, 2])
sage: B = SolitonCellularAutomata([a, u, u, u, x, y], ['E', 6, 1], 1)
sage: B
Soliton cellular automata of type ['E', 6, 1] and vacuum = 1
initial state:
(-2, 5) . . . . (-5, 2, 6) (-2, -6, 4)
evoltuions: []
current state:
(-2, 5) . . . . (-5, 2, 6) (-2, -6, 4)
sage: B.print_states(8)
t: 0 ...
t: 7
. . . (-2, 5) (-2, -5, 4, 6) ... (-6, 2) ...

```

evolve(carrier_capacity=None, carrier_index=None, number=None)

Evolve self.

Time evolution T_s of a SCA state p is determined by

$$u_{r,s} \otimes T_s(p) = R(p \otimes u_{r,s}),$$

where $u_{r,s}$ is the maximal element of $B^{r,s}$.

INPUT:

- `carrier_capacity` – (default: the number of balls in the system) the size s of carrier
- `carrier_index` – (default: the vacuum index) the index r of the carrier
- `number` – (optional) the number of times to perform the evolutions

To perform multiple evolutions of the SCA, `carrier_capacity` and `carrier_index` may be lists of the same length.

EXAMPLES:

```

sage: B = SolitonCellularAutomata('3411111122411112223', 4)
sage: for k in range(10):
....:     B.evolve()
sage: B
Soliton cellular automata of type ['A', 3, 1] and vacuum = 1
initial state:
34.....224.....2223
evoltuions: [(1, 19), (1, 19), (1, 19), (1, 19), (1, 19),
              (1, 19), (1, 19), (1, 19), (1, 19), (1, 19)]
current state:
.....2344.....222....23..... .

```

(continues on next page)

(continued from previous page)

(continues on next page)

(continued from previous page)

```

4
Last carrier:
1
3
sage: B
Soliton cellular automata of type ['A', 3, 1] and vacuum = 1
initial state:
34.....224.....2223
evolutions: [(2, 1), (2, 1), (2, 1)]
current state:
.24.....222.....2222.

```

latex_state_evolution(*num, scale=1*)

Return a latex version of the evolution process of the state num.

See also*state_evolution()*, *print_state_evolution()***EXAMPLES:**

```

sage: B = SolitonCellularAutomata('113123', 3)
sage: B.evolve(3)
sage: B.latex_state_evolution(0)
\begin{tikzpicture}[scale=1]
\node (i0) at (0.0,0.9) {$1$};
\node (i1) at (2.48,0.9) {$1$};
\node (i2) at (4.96,0.9) {$3$};
...
\draw[->] (i5) -- (t5);
\draw[->] (u6) -- (u5);
\end{tikzpicture}
sage: B.latex_state_evolution(1)
\begin{tikzpicture}[scale=1]
...
\end{tikzpicture}

```

latex_states(*num=None, as_array=True, box_width='5pt'*)

Return a latex version of the states.

INPUT:

- *num* – the number of states
- *as_array* – boolean (default: `True`); if `True`, then the states are placed inside of an array; if `False`, then the states are given as a word
- *box_width* – (default: '`5pt`') the width of the `.` used to represent the vacuum state when *as_array* is `True`

If *as_array* is `False`, then the vacuum element is printed in a gray color. If *as_array* is `True`, then the vacuum is given as `.`

Use the *box_width* to help create more even spacing when a column in the output contains only vacuum elements.

EXAMPLES:

```

sage: B = SolitonCellularAutomata('411122', 4)
sage: B.latex_states(8)
{\arraycolsep=0.5pt \begin{array}{c|cccccccccccccc}
t = 0 & \cdots & \makebox[5pt]{.} & 4 & \makebox[5pt]{.} \\
& \makebox[5pt]{.} & \makebox[5pt]{.} & 2 & 2 \\
t = 1 & \cdots & 4 & \makebox[5pt]{.} & \makebox[5pt]{.} & 2 & 2 & \cdots \\
\cdots \\
t = 2 & \cdots & 4 & \makebox[5pt]{.} & 2 & 2 & \cdots \\
t = 3 & \cdots & 4 & 2 & 2 & \cdots \\
t = 4 & \cdots & 2 & 4 & 2 & \cdots \\
t = 5 & \cdots & 2 & 4 & \makebox[5pt]{.} & 2 & \cdots \\
t = 6 & \cdots & 2 & 4 & \makebox[5pt]{.} & \makebox[5pt]{.} & 2 & \cdots \\
& 2 & \cdots \\
t = 7 & \cdots & \makebox[5pt]{.} & 2 & 4 & \makebox[5pt]{.} \\
& \makebox[5pt]{.} & \makebox[5pt]{.} & 2 & \cdots \\
\end{array}

sage: B = SolitonCellularAutomata('511122', 5)
sage: B.latex_states(8, as_array=False)
{\begin{array}{c|c}
t = 0 & \cdots \{\color{gray} 1\} 5 \{\color{gray} 1\} \\
& \{\color{gray} 1\} \{\color{gray} 1\} 2 2 \\
t = 1 & \cdots 5 \{\color{gray} 1\} \{\color{gray} 1\} 2 2 \cdots \\
t = 2 & \cdots 5 \{\color{gray} 1\} 2 2 \cdots \\
t = 3 & \cdots 5 2 2 \cdots \\
t = 4 & \cdots 2 5 2 \cdots \\
t = 5 & \cdots 2 5 \{\color{gray} 1\} 2 \cdots \\
t = 6 & \cdots 2 5 \{\color{gray} 1\} \{\color{gray} 1\} 2 \cdots \\
t = 7 & \cdots \{\color{gray} 1\} 2 5 \{\color{gray} 1\} \\
& \{\color{gray} 1\} \{\color{gray} 1\} 2 \cdots \\
\end{array}}

```

print_state (num=None, vacuum_letter='.', remove_trailing_vacuums=False)

Print the state num.

INPUT:

- num – (default: the current state) the state to print
- vacuum_letter – (default: '.') the letter to print for the vacuum
- remove_trailing_vacuums – boolean (default: False); if True then this does not print the vacuum letters at the right end of the state

EXAMPLES:

```

sage: B = SolitonCellularAutomata('341111122411112223', 4)
sage: B.print_state()
34.....224....223
sage: B.evolve(number=2)
sage: B.print_state(vacuum_letter=',')
.....,34,,,224,,223,.....
sage: B.print_state(10, '_')
2344_____222____23
sage: B.print_state(10, '_', True)
2344_____222____23

```

print_state_evolution (num)

Print the evolution process of the state num.

See also

`state_evolution()`, `latex_state_evolution()`

EXAMPLES:

```
sage: B = SolitonCellularAutomata('1113123', 3)
sage: B.evolve(3)
sage: B.evolve(3)
sage: B.print_state_evolution(0)
      1      1      1      3      1      2      3
      |      |      |      |      |      |      |
111 --+-- 111 --+-- 111 --+-- 113 --+-- 112 --+-- 123 --+-- 113 --+-- 111
      |      |      |      |      |      |      |
      1      1      3      2      3      1      1
sage: B.print_state_evolution(1)
      1      1      3      2      3      1      1
      |      |      |      |      |      |      |
111 --+-- 113 --+-- 133 --+-- 123 --+-- 113 --+-- 111 --+-- 111 --+-- 111
      |      |      |      |      |      |      |
      3      3      2      1      1      1      1
```

print_states (`num=None`, `vacuum_letter='.'`)

Print the first num states of self.

Note

If the number of states computed for self is less than num, then this evolves the system using the default time evolution.

INPUT:

- num – the number of states to print

EXAMPLES:

```
sage: B = SolitonCellularAutomata([[2], [-1], [1], [1], [1], [1], [2], [2], [3],
....:   [-2], [1], [1], [2], [-1], [1], [1], [1], [1], [2], [3], [3], [-3], [-2]],
....:   ['C', 3, 1])
sage: B.print_states(7)
t: 0
.....21....2232..21.....23332
t: 1
.....21...2232...21....23332....
t: 2
.....21..2232....21..23332.....
t: 3
.....221..232...2231..332.....
t: 4
.....221...232.2231....332.....
t: 5
.....221...2321223.....332.....
t: 6
..2221...321..223.....332.....
```

sage: B = SolitonCellularAutomata([[2], [1], [1], [1], [3], [-2], [1], [1],

(continues on next page)

(continued from previous page)

```

....: [1], [2], [2], [-3], [1], [1], [1], [1], [1], [1], [1], [1], [2], [3], [3], [-3]],
....: ['B', 3, 1])
sage: B.print_states(9, ' ')
t: 0
          2   32   223   2333
t: 1
          2   32   223   2333
t: 2
          2   32   223   2333
t: 3
          23  2223   2333
t: 4
          23  213   2333
t: 5
          2233  222  333
t: 6
          2233  23223  3
t: 7
          2233  232  23   3
t: 8
          2233  232  23   3

sage: B = SolitonCellularAutomata([[2], [-2], [1], [1], [1], [1], [2], [0], [-3],
....: [1], [1], [1], [1], [1], [2], [2], [3], [-3], ], ['D', 4, 2]])
sage: B.print_states(10)
t: 0
          .....22...203.....2233
t: 1
          .....22...203.....2233....
t: 2
          .....22..203...2233.....
t: 3
          .....22.203..2233.....
t: 4
          .....22203.2233.....
t: 5
          .....220223.233.....
t: 6
          .....2202..223..33.....
t: 7
          .....2202..223..33.....
t: 8
          .....2202...223...33.....
t: 9
          .....2202....223....33.....

```

Example 4.13 from [Yamada2007]:

```

sage: B = SolitonCellularAutomata([[3], [3], [1], [1], [1], [1], [2], [2], [2]], ['D',
..., 4, 3])
sage: B.print_states(15)
t: 0
          .....33....222
t: 1
          .....33...222...
t: 2
          .....33..222.....

```

(continues on next page)

(continued from previous page)

```
t: 3 .....33.222.....
t: 4 .....33222.....
t: 5 .....3022.....
t: 6 .....332.....
t: 7 .....03.....
t: 8 .....3E.....
t: 9 .....21.....
t: 10 .....20E.....
t: 11 .....233.....
t: 12 .....2302.....
t: 13 .....23322.....
t: 14 ..233.22.....
```

Example 4.14 from [Yamada2007]:

```
sage: B = SolitonCellularAutomata([[3],[1],[1],[1],[2],[3],[1],[1],[1],[2],
    ↪[3],[3]], ['D',4,3])
sage: B.print_states(15)
t: 0 .....3...23...233
t: 1 .....3..23..233...
t: 2 .....3.23.233.....
t: 3 .....323233.....
t: 4 .....0033.....
t: 5 .....313.....
t: 6 .....30E.3.....
t: 7 .....333...3.....
t: 8 .....3302...3.....
t: 9 .....33322...3.....
t: 10 .....333.22....3.....
t: 11 .....333..22.....3.....
t: 12 .....333...22.....3.....
t: 13 .....333...22.....3.....
```

(continues on next page)

(continued from previous page)

```
.....333....22.....3.....  
t: 14  
...333....22.....3.....
```

reset()

Reset self back to the initial state.

EXAMPLES:

```
sage: B = SolitonCellularAutomata('34111111224', 4)
sage: B
Soliton cellular automata of type ['A', 3, 1] and vacuum = 1
initial state:
34.....224
evolutions: []
current state:
34.....224
sage: B.evolve()
sage: B.evolve()
sage: B.evolve()
sage: B.evolve()
sage: B
Soliton cellular automata of type ['A', 3, 1] and vacuum = 1
initial state:
34.....224
evolutions: [(1, 11), (1, 11), (1, 11), (1, 11)]
current state:
...34..224.....
sage: B.reset()
sage: B
Soliton cellular automata of type ['A', 3, 1] and vacuum = 1
initial state:
34.....224
evolutions: []
current state:
34.....224
```

state_evolution(num)

Return a list of the carrier values at state num evolving to the next state.

If num is greater than the number of states, this performs the standard evolution T_k , where k is the number of balls in the system.

See also

[print_state_evolution\(\)](#), [latex_state_evolution\(\)](#)

EXAMPLES:

```
sage: B = SolitonCellularAutomata('1113123', 3)
sage: B.evolve(3)
sage: B.state_evolution(0)
[[[1, 1, 1]],  
 [[1, 1, 1]],  
 [[1, 1, 1]],
```

(continues on next page)

(continued from previous page)

```
[[1, 1, 3]],  
[[1, 1, 2]],  
[[1, 2, 3]],  
[[1, 1, 3]],  
[[1, 1, 1]]]  
sage: B.state_evolution(2)  
[[[1, 1, 1, 1, 1, 1, 1]],  
 [[1, 1, 1, 1, 1, 1, 1]],  
 [[1, 1, 1, 1, 1, 1, 1]],  
 [[1, 1, 1, 1, 1, 1, 1]],  
 [[1, 1, 1, 1, 1, 1, 1]],  
 [[1, 1, 1, 1, 1, 1, 1]],  
 [[1, 1, 1, 1, 1, 1, 1]],  
 [[1, 1, 1, 1, 1, 1, 1]],  
 [[1, 1, 1, 1, 1, 1, 3]],  
 [[1, 1, 1, 1, 1, 3, 3]],  
 [[1, 1, 1, 1, 1, 1, 3]],  
 [[1, 1, 1, 1, 1, 1, 1]],  
 [[1, 1, 1, 1, 1, 1, 1]],  
 [[1, 1, 1, 1, 1, 1, 1]]]
```

PLOTTING OF MANDELBROT AND JULIA SETS

2.1 Mandelbrot and Julia sets

Plots the Mandelbrot and Julia sets for general polynomial maps in the complex plane.

The Mandelbrot set is the set of complex numbers c for which the map $f_c(z)$ does not diverge when iterated from $z = 0$. This set of complex numbers can be visualized by plotting each value for c in the complex plane. The Mandelbrot set is often an example of a fractal when plotted in the complex plane. For general one parameter families of polynomials, the mandelbrot set is the parameter values for which the orbits of all critical points remains bounded.

The Julia set for a given parameter c is the set of complex numbers for which the function $f_c(z)$ is bounded under iteration.

AUTHORS:

- Ben Barros

```
sage.dynamics.complex_dynamics.mandel_julia.external_ray(theta, **kwds)
```

Draws the external ray(s) of a given angle (or list of angles) by connecting a finite number of points that were approximated using Newton's method. The algorithm used is described in a paper by Tomoki Kawahira.

REFERENCE:

[Kaw2009]

INPUT:

- theta – double or list of doubles, angles between 0 and 1 inclusive

kwds:

- image – 24-bit RGB image (default: None); user specified image of Mandelbrot set
- D – long (default: 25); depth of the approximation. As D increases, the external ray gets closer to the boundary of the Mandelbrot set. If the ray doesn't reach the boundary of the Mandelbrot set, increase D.
- S – long (default: 10); sharpness of the approximation. Adjusts the number of points used to approximate the external ray (number of points is equal to S*D). If ray looks jagged, increase S.
- R – long (default: 100); radial parameter. If R is large, the external ray reaches sufficiently close to infinity. If R is too small, Newton's method may not converge to the correct ray.
- prec – long (default: 300); specifies the bits of precision used by the Complex Field when using Newton's method to compute points on the external ray
- ray_color – RGB color (default: [255, 255, 255]) color of the external ray(s)

OUTPUT: 24-bit RGB image of external ray(s) on the Mandelbrot set

EXAMPLES:

```
sage: external_ray(1/3)
500x500px 24-bit RGB image
```

```
sage: external_ray(0.6, ray_color=[255, 0, 0])
500x500px 24-bit RGB image
```

```
sage: external_ray([0, 0.2, 0.4, 0.7])
500x500px 24-bit RGB image
```

```
sage: external_ray([i/5 for i in range(1,5)])
500x500px 24-bit RGB image
```

WARNING:

If you are passing in an image, make sure you specify which parameters to use when drawing the external ray. For example, the following is incorrect:

```
sage: M = mandelbrot_plot(x_center=0) # not tested
sage: external_ray(5/7, image=M) # not tested
500x500px 24-bit RGB image
```

To get the correct external ray, we adjust our parameters:

```
sage: M = mandelbrot_plot(x_center=0)
sage: external_ray(5/7, x_center=0, image=M)
500x500px 24-bit RGB image
```

Todo

The `copy()` function for bitmap images needs to be implemented in Sage.

`sage.dynamics.complex_dynamics.mandel_julia.julia_plot(f=None, **kwds)`

Plots the Julia set of a given polynomial f . Users can specify whether they would like to display the Mandelbrot side by side with the Julia set with the `mandelbrot` argument. If f is not specified, this method defaults to $f(z) = z^2 - 1$.

The Julia set of a polynomial f is the set of complex numbers z for which the function $f(z)$ is bounded under iteration. The Julia set can be visualized by plotting each point in the set in the complex plane. Julia sets are examples of fractals when plotted in the complex plane.

ALGORITHM:

Let $R_c = (1 + \sqrt{1 + 4|c|})/2$ if the polynomial is of the form $f(z) = z^2 + c$; otherwise, let $R_c = 2$. For every $p \in \mathbb{C}$, if $|f^k(p)| > R_c$ for some $k \geq 0$, then $f^n(p) \rightarrow \infty$. Let N be the maximum number of iterations. Compute the first N points on the orbit of p under f . If for any $k < N$, $|f^k(p)| > R_c$, we stop the iteration and assign a color to the point p based on how quickly p escaped to infinity under iteration of f . If $|f^i(p)| \leq R_c$ for all $i \leq N$, we assume p is in the Julia set and assign the point p the color black.

INPUT:

- f – input polynomial (default: $z^2 - 1$)
- `period` – list (default: `None`); returns the Julia set for a random c value with the given (formal) cycle structure
- `mandelbrot` – boolean (default: `True`); when set to `True`, an image of the Mandelbrot set is appended to the right of the Julia set

- `point_color` – RGB color (default: '`tomato`'); color of the point c in the Mandelbrot set (any valid input for Color)
- `x_center` – double (default: `-1.0`); real part of center point
- `y_center` – double (default: `0.0`); imaginary part of center point
- `image_width` – double (default: `4.0`); width of image in the complex plane
- `max_iteration` – long (default: `500`); maximum number of iterations the map $f(z)$
- `pixel_count` – long (default: `500`); side length of image in number of pixels
- `base_color` – hex color (default: '`steelblue`'); color used to determine the coloring of set (any valid input for Color)
- `level_sep` – long (default: `1`); number of iterations between each color level
- `number_of_colors` – long (default: `30`); number of colors used to plot image
- `interact` – boolean (default: `False`); controls whether plot will have interactive functionality

OUTPUT: 24-bit RGB image of the Julia set in the complex plane

Todo

Implement the side-by-side Mandelbrot-Julia plots for general one-parameter families of polynomials.

EXAMPLES:

The default `f` is $z^2 - 1$:

```
sage: julia_plot()
1001x500px 24-bit RGB image
```

To display only the Julia set, set `mandelbrot` to `False`:

```
sage: julia_plot(mandelbrot=False)
500x500px 24-bit RGB image
```

```
sage: R.<z> = CC[]
sage: f = z^3 - z + 1
sage: julia_plot(f)  # long time
500x500px 24-bit RGB image
```

To display an interactive plot of the Julia set in the Notebook, set `interact` to `True`. (This is only implemented for polynomials of the form $f = z^2 + c$):

```
sage: julia_plot(interact=True)
...interactive(children=(FloatSlider(value=-1.0, description='Real c',...
:::
sage: R.<z> = CC[]
sage: f = z^2 + 1/2
sage: julia_plot(f, interact=True)
...interactive(children=(FloatSlider(value=0.5, description='Real c',...
...))
```

To return the Julia set of a random c value with (formal) cycle structure $(2, 3)$, set `period = [2, 3]`:

```
sage: julia_plot(period=[2,3])
1001x500px 24-bit RGB image
```

To return all of the Julia sets of c values with (formal) cycle structure (2, 3):

```
sage: period = [2,3] # not tested
....: R.<C> = QQ[]
....: P.<x,y> = ProjectiveSpace(R,1)
....: f = DynamicalSystem([x^2+c*y^2, y^2])
....: L = f.dynatomic_polynomial(period).subs({x:0,y:1}).roots(ring=CC)
....: c_values = [k[0] for k in L]
....: for c in c_values:
....:     julia_plot(c)
```

Polynomial maps can be defined over a polynomial ring or a fraction field, so long as f is polynomial:

```
sage: R.<z> = CC[]
sage: f = z^2 - 1
sage: julia_plot(f)
1001x500px 24-bit RGB image
```

```
sage: R.<z> = CC[]
sage: K = R.fraction_field(); z = K.gen()
sage: f = z^2-1
sage: julia_plot(f)
1001x500px 24-bit RGB image
```

Interact functionality is not implemented if the polynomial is not of the form $f = z^2 + c$:

```
sage: R.<z> = CC[]
sage: f = z^3 + 1
sage: julia_plot(f, interact=True)
Traceback (most recent call last):
...
NotImplementedError: The interactive plot is only implemented for ...
```

`sage.dynamics.complex_dynamics.mandel_julia.kneading_sequence(theta)`

Determines the kneading sequence for an angle theta in RR/ZZ which is periodic under doubling. We use the definition for the kneading sequence given in Definition 3.2 of [LS1994].

INPUT:

- θ – a rational number with odd denominator

OUTPUT: string representing the kneading sequence of θ in RR/ZZ

REFERENCES:

[LS1994]

EXAMPLES:

```
sage: kneading_sequence(0)
'*'
```

```
sage: kneading_sequence(1/3)
'1*'
```

Since $1/3$ and $7/3$ are the same in RR/ZZ, they have the same kneading sequence:

```
sage: kneading_sequence(7/3)
'1*' 
```

We can also use (finite) decimal inputs, as long as the denominator in reduced form is odd:

```
sage: kneading_sequence(1.2)
'110*' 
```

Since rationals with even denominator are not periodic under doubling, we have not implemented kneading sequences for such rationals:

```
sage: kneading_sequence(1/4)
Traceback (most recent call last):
...
ValueError: input must be a rational number with odd denominator 
```

`sage.dynamics.complex_dynamics.mandel_julia.mandelbrot_plot(f=None, **kwds)`

Plot of the Mandelbrot set for a one parameter family of polynomial maps.

The family $f_c(z)$ must have parent \mathbb{R} of the form $\mathbb{R}.<z, c> = \text{CC}[]$.

REFERENCE:

[Dev2005]

INPUT:

- `f` – map (default: $z^2 + c$); polynomial family used to plot the Mandelbrot set
- `parameter` – variable (default: `c`); parameter variable used to plot the Mandelbrot set
- `x_center` – double (default: `-1.0`); Real part of center point
- `y_center` – double (default: `0.0`); Imaginary part of center point
- `image_width` – double (default: `4.0`); width of image in the complex plane
- `max_iteration` – long (default: `500`); maximum number of iterations the map `f_c(z)`
- `pixel_count` – long (default: `500`); side length of image in number of pixels
- `base_color` – RGB color (default: `[40, 40, 40]`); color used to determine the coloring of set
- `level_sep` – long (default: `1`); number of iterations between each color level
- `number_of_colors` – long (default: `30`); number of colors used to plot image
- `interact` – boolean (default: `False`); controls whether plot will have interactive functionality

OUTPUT: 24-bit RGB image of the Mandelbrot set in the complex plane

EXAMPLES:

```
sage: mandelbrot_plot()
500x500px 24-bit RGB image 
```

```
sage: mandelbrot_plot(pixel_count=1000)
1000x1000px 24-bit RGB image 
```

```
sage: mandelbrot_plot(x_center=-1.11, y_center=0.2283, image_width=1/128, # long_
˓→time
....: max_iteration=2000, number_of_colors=500, base_color=[40, 100, 100])
500x500px 24-bit RGB image 
```

To display an interactive plot of the Mandelbrot in the Notebook, set `interact` to True. (This is only implemented for $z^2 + c$):

```
sage: mandelbrot_plot(interact=True)
...interactive(children=(FloatSlider(value=0.0, description='Real center', max=1.0, min=-1.0, step=1e-05),
FloatSlider(value=0.0, description='Imag center', max=1.0, min=-1.0, step=1e-05),
FloatSlider(value=4.0, description='Width', max=4.0, min=1e-05, step=1e-05),
IntSlider(value=500, description='Iterations', max=1000),
IntSlider(value=500, description='Pixels', max=1000, min=10),
IntSlider(value=1, description='Color sep', max=20, min=1),
IntSlider(value=30, description='# Colors', min=1),
ColorPicker(value='#ff6347', description='Base color'), Output()),
_dom_classes=('widget-interact',))
```

```
sage: mandelbrot_plot(interact=True, x_center=-0.75, y_center=0.25,
....: image_width=1/2, number_of_colors=75)
...interactive(children=(FloatSlider(value=-0.75, description='Real center', max=1.0, min=-1.0, step=1e-05),
FloatSlider(value=0.25, description='Imag center', max=1.0, min=-1.0, step=1e-05),
FloatSlider(value=0.5, description='Width', max=4.0, min=1e-05, step=1e-05),
IntSlider(value=500, description='Iterations', max=1000),
IntSlider(value=500, description='Pixels', max=1000, min=10),
IntSlider(value=1, description='Color sep', max=20, min=1),
IntSlider(value=75, description='# Colors', min=1),
ColorPicker(value='#ff6347', description='Base color'), Output()),
_dom_classes=('widget-interact',))
```

Polynomial maps can be defined over a multivariate polynomial ring or a univariate polynomial ring tower:

```
sage: R.<z,c> = CC[]
sage: f = z^2 + c
sage: mandelbrot_plot(f)
500x500px 24-bit RGB image
```

```
sage: B.<c> = CC[]
sage: R.<z> = B[]
sage: f = z^5 + c
sage: mandelbrot_plot(f) # long time
500x500px 24-bit RGB image
```

When the polynomial is defined over a multivariate polynomial ring it is necessary to specify the parameter variable (default parameter is `c`):

```
sage: R.<a,b> = CC[]
sage: f = a^2 + b^3
sage: mandelbrot_plot(f, parameter=b) # long time
500x500px 24-bit RGB image
```

Interact functionality is not implemented for general polynomial maps:

```
sage: R.<z,c> = CC[]
sage: f = z^3 + c
sage: mandelbrot_plot(f, interact=True)
Traceback (most recent call last):
...
NotImplementedError: interact only implemented for z^2 + c
```

DISCRETE DYNAMICAL SYSTEMS

A *discrete dynamical system* (henceforth *DDS*) is a pair (X, ϕ) of a set X and a map $\phi : X \rightarrow X$. (This is one of several things known as a “discrete dynamical system” in mathematics.)

This file implements the following classes for discrete dynamical systems:

- *DiscreteDynamicalSystem*: general discrete dynamical system, as above. Inherit from this class if the ground set of your DDS is infinite or large enough that you want to avoid it getting stored as a list. See the doc of this class for further details.
- *FiniteDynamicalSystem*: finite discrete dynamical system. This can be instantiated by calling *DiscreteDynamicalSystem* with the parameter `is_finite` set to `True`.
- *InvertibleDiscreteDynamicalSystem*: invertible discrete dynamical system. This implements an `inverse_evolution` method for ϕ^{-1} (the default implementation simply applies ϕ over and over until the original value is revisited; the last value before that is then taken to be the result). This can be instantiated by calling *DiscreteDynamicalSystem* with the parameter `inverse` provided.
- *InvertibleFiniteDynamicalSystem*: invertible finite discrete dynamical system. This can be instantiated by calling *DiscreteDynamicalSystem* with the parameter `is_finite` set to `True` and the parameter `inverse` provided.

Todo

- Implement some more functionality for homomesy and invariance testing: Checking invariance on a sublist; computing the first k entries of an orbit (useful when orbits can be too large); `orbits_iterator` (for when there are too many orbits to list); etc.
- Further examples for non-auto functionality: e.g., infection on a chessboard; Conway’s game of life.
- Subclasses for DDSes whose ground set is an enumerated set. Should we have those?
- Implement caching for orbits (can be useful: some DDSes have a complicated evolution that shouldn’t be recomputed every time). Does this require a whole new class?
- Further functionality for non-invertible DDSes: `is_recurrent`, `recurrent_entries`, `idempotent_power`, etc.
- Wrap (some of) the `cyclic_sieving_phenomenon.py` methods (`sage.combinat.cyclic_sieving_phenomenon`).
- Interact with `sage.dynamics`. This requires someone who knows the latter part of the Sage library well.

```
class sage.dynamics.finite_dynamical_system.DiscreteDynamicalSystem(X, phi,
cache_or-
bits=False,
create_tu-
ple=False)
```

Bases: `SageObject`

A discrete dynamical system.

A *discrete dynamical system* (henceforth *DDS*) is a pair (X, ϕ) of a set X and a map $\phi : X \rightarrow X$. The set X is called the *ground set* of the DDS; the map ϕ is called the *evolution* of the DDS; the inverse map ϕ^{-1} (when it exists) is called the *inverse evolution* of the DDS.

The DDS is called *finite* if X is finite. The DDS is called *invertible* if the map ϕ is invertible.

Given a DDS (X, ϕ) , we can study

- its orbits (i.e., the lists $(s, \phi(s), \phi^2(s), \phi^3(s), \dots)$ for $s \in X$),
- its invariants (i.e., maps $f : X \rightarrow Y$ satisfying $f \circ \phi = f$),
- its cycles (i.e., lists (u_1, u_2, \dots, u_k) of elements of X such that $\phi(u_i) = u_{i+1}$ for each $i \leq k$, where we set $u_{k+1} = u_1$),
- its homomesies (i.e., maps $h : X \rightarrow A$ to a \mathbf{Q} -vector space A such that the average of the values of h on each cycle is the same),

and various other features. (Some of these require X to be finite or at least to have finite orbits.)

INPUT:

- `X` – set, list, tuple, or another iterable, or `None` (default: `None`); the ground set for the DDS. This can be `None` (in which case Sage will not know the ground set, but can still apply evolution to any elements that are provided to it). Make sure to set the `create_tuple` argument to `True` if the `X` you provide is an iterator or a list, as otherwise your `X` would be exposed (and thus subject to mutation or exhaustion).
- `phi` – function, or callable that acts like a function; the evolution of the DDS
- `cache_orbits` – boolean (default: `False`); whether or not the orbits should be cached once they are computed. This currently does nothing, as we are not caching orbits yet.
- `create_tuple` – boolean (default: `False`); whether or not the input `X` should be translated into a tuple. Set this to `True` to prevent mutation if `X` is a list, and to prevent exhaustion if `X` is an iterator.
- `inverse` – function, or callable that acts like a function, or boolean or `None` (default: `None`); the inverse evolution of the DDS, if the DDS is invertible. Set this to `None` or `False` if the DDS is not invertible (or you don't want Sage to treat it as such). Alternatively, by setting this argument to `True`, you can signal that the DDS is invertible without providing the inverse evolution. (In this case, Sage will compute the inverse, assuming the orbits to be finite.)
- `is_finite` – boolean or `None` (default: `None`); whether the DDS is finite. The default option `None` leaves this to Sage to decide. Only set this to `True` if you provide the ground set `X`.

EXAMPLES:

The following discrete dynamical system is neither finite nor invertible:

```
sage: D = DiscreteDynamicalSystem(NN, lambda x: x + 2)
sage: D.ground_set()
Non negative integer semiring
sage: D.evolution()(5)
7
```

(continues on next page)

(continued from previous page)

```
sage: D.evolution_power(7) (5)
19
sage: D.evolution_power(0) (5)
5
```

The necessity of `create_tuple=True`:

```
sage: X = [0, 1, 2, 3, 4]
sage: D_wrong = DiscreteDynamicalSystem(X, lambda x: (x**3) % 5)
sage: D_right = DiscreteDynamicalSystem(X, lambda x: (x**3) % 5, create_
    ↪tuple=True)
sage: X[4] = 666 # evil
sage: D_wrong.ground_set()
[0, 1, 2, 3, 666]
sage: D_right.ground_set()
(0, 1, 2, 3, 4)
```

Here is an invertible (but infinite) discrete dynamical system whose orbits are finite:

```
sage: D = DiscreteDynamicalSystem(NN, lambda x: (x + 2 if x % 6 < 4 else x - 4), ↪
    ↪inverse=True)
sage: D.ground_set()
Non negative integer semiring
sage: D.evolution() (5)
1
sage: D.evolution() (1)
3
sage: D.evolution() (3)
5
sage: D.evolution_power(2) (5)
3
sage: D.evolution_power(3) (5)
5
sage: D.evolution_power(-2) (5)
1
sage: D.inverse_evolution() (4)
2
sage: D.orbit(3)
[3, 5, 1]
```

Setting the `inverse` parameter to `None` or `False` would give the same system without the functionality that relies on invertibility:

```
sage: D = DiscreteDynamicalSystem(NN, lambda x: (x + 2 if x % 6 < 4 else x - 4), ↪
    ↪inverse=False)
sage: D.ground_set()
Non negative integer semiring
sage: D.evolution() (5)
1
sage: D.inverse_evolution() (4)
Traceback (most recent call last):
...
AttributeError: 'DiscreteDynamicalSystem' object has no attribute 'inverse_
    ↪evolution'...
sage: D.orbit(3)
[3, 5, 1]
```

(continues on next page)

(continued from previous page)

```
sage: D = DiscreteDynamicalSystem(NN, lambda x: (x + 2 if x % 6 < 4 else x - 4),  
    ↵inverse=None)  
sage: D.ground_set()  
Non negative integer semiring  
sage: D.evolution()(5)  
1  
sage: D.inverse_evolution()(4)  
Traceback (most recent call last):  
...  
AttributeError: 'DiscreteDynamicalSystem' object has no attribute 'inverse_  
evolution'...  
sage: D.orbit(3)  
[3, 5, 1]
```

Next, let us try out a finite non-invertible DDS:

```
sage: D = DiscreteDynamicalSystem(tuple(range(13)), lambda x: (x**2) % 13)  
sage: D.ground_set()  
(0, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12)  
sage: D.evolution()(4)  
3  
sage: D.orbit(4)  
[4, 3, 9]  
sage: D.orbit(1)  
[1]  
sage: D.orbit(3)  
[3, 9]
```

Note that the finiteness is automatically being inferred here, since the (finite) tuple `tuple(range(13))` has been provided as the ground set.

Finally, here is a finite invertible DDS:

```
sage: X = cartesian_product([[0, 1]]*8)  
sage: Y = [s for s in X if sum(s) == 4]  
sage: rot = lambda s: s[1:] + (s[0],)  
sage: D = DiscreteDynamicalSystem(Y, rot, inverse=True)  
sage: D.evolution()(0, 1, 1, 0, 1, 0, 0, 1)  
(1, 1, 0, 1, 0, 0, 1, 0)  
sage: D.inverse_evolution()(0, 1, 1, 0, 1, 0, 0, 1)  
(1, 0, 1, 1, 0, 1, 0, 0)  
sage: sorted(D.orbit_lengths())  
[2, 4, 8, 8, 8, 8, 8, 8, 8]
```

We could have just as well provided its inverse explicitly:

```
sage: rot7 = lambda s: (s[-1],) + s[:-1]  
sage: D = DiscreteDynamicalSystem(Y, rot, inverse=rot7)  
sage: D.evolution()(0, 1, 1, 0, 1, 0, 0, 1)  
(1, 1, 0, 1, 0, 0, 1, 0)  
sage: D.inverse_evolution()(0, 1, 1, 0, 1, 0, 0, 1)  
(1, 0, 1, 1, 0, 1, 0, 0)
```

evolution()

Return the evolution of `self`.

EXAMPLES:

```
sage: D = DiscreteDynamicalSystem([1, 3, 4], lambda x: (3 if x == 4 else 1),  
    ↪create_tuple=True)  
sage: ev = D.evolution()  
sage: ev(1)  
1  
sage: ev(4)  
3
```

`evolution_power(n)`

Return the n -th power (with respect to composition) of the evolution of `self`.

This requires n to be a nonnegative integer.

EXAMPLES:

```
sage: D = DiscreteDynamicalSystem(range(10), lambda x: (x + 3) % 10, create_  
    ↪tuple=True)  
sage: ev3 = D.evolution_power(3)  
sage: ev3(1)  
0  
sage: ev3(2)  
1  
sage: ev0 = D.evolution_power(0)  
sage: ev0(1)  
1  
sage: ev0(2)  
2  
sage: D.evolution_power(-1)  
Traceback (most recent call last):  
...  
ValueError: the n-th power of evolution is only defined for nonnegative  
    ↪integers n
```

`ground_set()`

Return the ground set of `self`.

This will return `None` if no ground set was provided in the construction of `self`.

Warning

Unless `self` has been constructed with the `create_tuple` parameter set to `True`, this method will return whatever ground set was provided to the constructor. In particular, if a list was provided, then this precise list will be returned; mutating this list will then corrupt `self`.

EXAMPLES:

```
sage: D = DiscreteDynamicalSystem([1, 3, 4], lambda x: (3 if x == 4 else 1),  
    ↪create_tuple=True)  
sage: D.ground_set()  
(1, 3, 4)
```

`is_homomesic(h, average=None, find_average=False, elements=None)`

Check if `h` (a map from the ground set of `self` to a \mathbf{Q} -vector space) is homomesic with respect to `self`.

If the optional argument `average` is provided, then this also checks that the averages are equal to `average`.

If the optional argument `find_average` is set to `True`, then this method returns the average of `h` in case `h` is homomesic (instead of returning `True`).

If the optional argument `elements` (an iterable of elements of the ground set of `self`) is provided, then this method only checks homomesy for the cycles in the orbits of the elements given in the list `elements`. Note that `elements` must be provided if the ground set of `self` is infinite (or cannot be iterated through for any other reason), since there is no way to check all the cycles in this case.

This method will fail to terminate if any element of `elements` has an infinite orbit.

Let us recall the definition of homomesy: Let (X, ϕ) be a DDS. A *cycle* of (X, ϕ) is a finite list $u = (u_1, u_2, \dots, u_k)$ of elements of X such that $\phi(u_i) = u_{i+1}$ for each $i \leq k$, where we set $u_{k+1} = u_1$. Note that any element of X whose orbit is finite has a cycle in its orbit. Now, let h be a map from X to a \mathbb{Q} -vector space A . If $u = (u_1, u_2, \dots, u_k)$ is any cycle of (X, ϕ) , then the *average* of h on this cycle is defined to be the element $(h(u_1) + h(u_2) + \dots + h(u_k))/k$ of A . We say that h is *homomesic* (with respect to the DDS (X, ϕ)) if and only if the averages of h on all cycles of (X, ϕ) are equal.

EXAMPLES:

```
sage: W = Words(2, 5)
sage: F = DiscreteDynamicalSystem(W, lambda x: x[1:] + Word([x[0]]), is_
→finite=True, inverse=True)
sage: F.is_homomesic(lambda w: sum(w))
False
sage: F.is_homomesic(lambda w: 1, average=1)
True
sage: F.is_homomesic(lambda w: 1, average=0)
False
sage: F.is_homomesic(lambda w: 1)
True
sage: F.is_homomesic(lambda w: 1, find_average=True)
1
sage: F.is_homomesic(lambda w: w[0] - w[1], average=0)
True
sage: F.is_homomesic(lambda w: w[0] - w[1], find_average=True)
0
```

Now, let us check homomesy restricted to specific cycles:

```
sage: F = finite_dynamical_systems.bitstring_rotation(7)
sage: descents = lambda x: sum(1 for i in range(6) if x[i] > x[i+1])
sage: F.is_homomesic(descents)
False
sage: F.is_homomesic(descents, elements=[(1, 0, 1, 0, 0, 0, 0), (1, 0, 0, 1, 0, 0, 0)])
True
sage: F.is_homomesic(descents, elements=[(1, 0, 1, 0, 0, 0, 0), (1, 1, 0, 0, 0, 0, 0)])
False
sage: F.is_homomesic(descents, elements=[(1, 0, 1, 0, 0, 0, 0)])
True
sage: F.is_homomesic(descents, elements=[])
True
```

And here is a non-invertible finite dynamical system:

```
sage: F = finite_dynamical_systems.one_line([9, 1, 1, 6, 5, 4, 5, 5, 1])
sage: F.is_homomesic(lambda i: i)
True
```

(continues on next page)

(continued from previous page)

```
sage: F.is_homomesic(lambda i: i % 2)
False
sage: F.is_homomesic(lambda i: i % 2, elements=[2, 9, 7])
True
sage: F.is_homomesic(lambda i: i % 2, elements=[2, 9, 4])
False
sage: F.is_homomesic(lambda i: i % 2, elements=[2, 9, 5, 7, 8, 2])
True
```

orbit(*x*, *preperiod=False*)

Return the orbit of the element *x* of the ground set of *self* under the evolution ϕ of *self*.

This orbit is a list beginning with *x* and ending with the last element that is not a repetition of a previous element. If the orbit is infinite, then this method does not terminate!

If the optional argument *preperiod* is set to True, then this method returns a pair (\circ, k) , where \circ is the orbit of *self*, while k is the smallest nonnegative integer such that $\phi^k(x) \in \{\phi^i(x) \mid i > k\}$.

The orbit of the element *x* is also called the “rho” of *x*, due to its shape when it is depicted as a directed graph.

EXAMPLES:

```
sage: D = DiscreteDynamicalSystem(tuple(range(11)), lambda x: (x ** 2) % 11)
sage: D.orbit(6)
[6, 3, 9, 4, 5]
sage: D.orbit(6, preperiod=True)
([6, 3, 9, 4, 5], 1)
sage: D.orbit(3)
[3, 9, 4, 5]
sage: D.orbit(3, preperiod=True)
([3, 9, 4, 5], 0)
sage: D.orbit(9)
[9, 4, 5, 3]
sage: D.orbit(0)
[0]
```

```
class sage.dynamics.finite_dynamical_system.FiniteDynamicalSystem(X, phi, cache_or-
bits=False,
create_tu-
ple=False)
```

Bases: *DiscreteDynamicalSystem*

A finite discrete dynamical system.

A *finite discrete dynamical system* (henceforth *FDDS*) is a pair (X, ϕ) of a finite set X and a map $\phi : X \rightarrow X$. This set X is called the *ground set* of the *FDDS*, while the map ϕ is called the *evolution* of the *FDDS*.

The ground set X should always be provided as an iterable when defining a *FiniteDynamicalSystem*.

EXAMPLES:

```
sage: from sage.dynamics.finite_dynamical_system import FiniteDynamicalSystem
sage: D = FiniteDynamicalSystem(tuple(range(11)), lambda x: (x**2) % 11)
sage: D.ground_set()
(0, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10)
sage: D.evolution()(4)
5
```

(continues on next page)

(continued from previous page)

```
sage: D.orbit(4)
[4, 5, 3, 9]
sage: D.orbit(1)
[1]
sage: D.orbit(2)
[2, 4, 5, 3, 9]

sage: X = cartesian_product([[0, 1]]*8)
sage: Y = [s for s in X if sum(s) == 4]
sage: rot = lambda s : s[1:] + (0,)
sage: D = FiniteDynamicalSystem(Y, rot)
sage: D.evolution()((1, 1, 1, 0, 1, 0, 0, 1))
(1, 1, 0, 1, 0, 0, 1, 0)
```

cycles()

Return a list of all cycles of `self`, up to cyclic rotation.

We recall the definition of cycles: Let (X, ϕ) be a DDS. A *cycle* of (X, ϕ) is a finite list $u = (u_1, u_2, \dots, u_k)$ of elements of X such that $\phi(u_i) = u_{i+1}$ for each $i \leq k$, where we set $u_{k+1} = u_1$. Note that any element of X whose orbit is finite has a cycle in its orbit.

EXAMPLES:

```
sage: BS = finite_dynamical_systems.bulgarian_solitaire
sage: BS(8).cycles()
[[[4, 3, 1], [3, 3, 2], [3, 2, 2, 1], [4, 2, 1, 1]],
 [[4, 2, 2], [3, 3, 1, 1]]]
sage: BS(6).cycles()
[[[3, 2, 1]]]

sage: D = DiscreteDynamicalSystem(tuple(range(6)), lambda x: (x + 2) % 6)
sage: D.cycles()
[[5, 1, 3], [4, 0, 2]]
sage: D = DiscreteDynamicalSystem(tuple(range(6)), lambda x: (x ** 2) % 6)
sage: D.cycles()
[[1], [4], [3], [0]]
sage: D = DiscreteDynamicalSystem(tuple(range(11)), lambda x: (x ** 2 - 1) % 11)
sage: D.cycles()
[[10, 0], [8], [4]]

sage: F = finite_dynamical_systems.one_line([4, 7, 2, 6, 2, 10, 9, 11, 5, 6,
    ↪12, 12, 12, 6])
sage: F.cycles()
[[6, 10], [12], [9, 5, 2, 7]]
```

is_invariant(*f*)

Check if *f* is an invariant of `self`.

Let (X, ϕ) be a discrete dynamical system. Let Y be any set. Let $f : X \rightarrow Y$ be any map. Then, we say that *f* is an *invariant* of (X, ϕ) if and only if $f \circ \phi = f$.

EXAMPLES:

```
sage: W = Words(2, 5)
sage: F = DiscreteDynamicalSystem(W, lambda x: x[1:] + Word([x[0]]), is_
    ↪finite=True)
```

(continues on next page)

(continued from previous page)

```
sage: F.is_invariant(lambda w: sum(w))
True
sage: F.is_invariant(lambda w: 1)
True
sage: F.is_invariant(lambda w: w[0] - w[1])
False
sage: F.is_invariant(lambda w: sum(i**2 for i in w))
True
```

Invariants and non-invariants of a permutation:

```
sage: F = finite_dynamical_systems.permutation([3, 4, 5, 6, 1, 2])
sage: F.is_invariant(lambda i: i % 2)
True
sage: F.is_invariant(lambda i: i % 3)
False
sage: F.is_invariant(lambda i: i > 1)
False
sage: F.is_invariant(lambda i: i % 2 == 0)
True
```

class sage.dynamics.finite_dynamical_system.**InvertibleDiscreteDynamicalSystem**(*X*,
phi,
in-
verse=None,
cache_or-
bits=False,
cre-
ate_tu-
ple=False)

Bases: *DiscreteDynamicalSystem*

An invertible discrete dynamical system.

A *discrete dynamical system* (henceforth *DDS*) is a pair (X, ϕ) of a set X and a map $\phi : X \rightarrow X$. This set X is called the *ground set* of the DDS, while the map ϕ is called the *evolution* of the DDS. An *invertible DDS* is a DDS (X, ϕ) whose evolution ϕ is invertible. In that case, ϕ^{-1} is called the *inverse evolution* of the DDS.

See *DiscreteDynamicalSystem* for details.

INPUT:

- *X* – set, list, tuple, or another iterable, or None; the ground set for the DDS. This can be None in case of a *DiscreteDynamicalSystem* or a *InvertibleDiscreteDynamicalSystem*. Make sure to set the `create_tuple` argument to True if you provide an iterator or a list for *X*, as otherwise the input would be exposed.
- *phi* – function, or callable that acts like a function; the evolution of the DDS
- *inverse* – function, or callable that acts like a function; the inverse evolution of the DDS. (A default implementation is implemented when this argument is not provided; but it assumes the orbits to be finite.)
- *cache_orbits* – boolean (default: False); whether or not the orbits should be cached once they are computed.
- *create_tuple* – boolean (default: False); whether or not the input *X* should be translated into a tuple (set this to True to prevent mutation if *X* is a list, and to prevent exhaustion if *X* is an iterator).

EXAMPLES:

```
sage: from sage.dynamics.finite_dynamical_system import_
    ~InvertibleDiscreteDynamicalSystem
sage: D = InvertibleDiscreteDynamicalSystem(NN, lambda x: (x + 2 if x % 4 < 2_
    ~else x - 2))
sage: D.ground_set()
Non negative integer semiring
sage: D.evolution()(5)
7
sage: D.evolution()(6)
4
sage: D.evolution()(4)
6
sage: D.inverse_evolution()(4)
6
```

The necessity of `create_tuple=True`:

```
sage: X = [0, 1, 2, 3, 4]
sage: D_wrong = InvertibleDiscreteDynamicalSystem(X, lambda x: (x**3) % 5)
sage: D_right = InvertibleDiscreteDynamicalSystem(X, lambda x: (x**3) % 5, create_
    ~tuple=True)
sage: X[4] = 666 # evil
sage: D_wrong.ground_set()
[0, 1, 2, 3, 666]
sage: D_right.ground_set()
(0, 1, 2, 3, 4)
```

`evolution_power(n)`

Return the n -th power (with respect to composition) of the evolution of `self`.

This requires n to be an integer.

EXAMPLES:

```
sage: D = DiscreteDynamicalSystem(range(10), lambda x: (x + 3) % 10, create_
    ~tuple=True, inverse=True)
sage: ev3 = D.evolution_power(3)
sage: ev3(1)
0
sage: ev3(2)
1
sage: ev0 = D.evolution_power(0)
sage: ev0(1)
1
sage: ev0(2)
2
sage: evm1 = D.evolution_power(-1)
sage: evm1(1)
8
sage: evm1(2)
9
sage: evm2 = D.evolution_power(-2)
sage: evm2(1)
5
sage: evm2(2)
6
```

`inverse_evolution()`

Return the inverse evolution of `self` (as a map from the ground set of `self` to itself).

EXAMPLES:

```
sage: D = DiscreteDynamicalSystem(tuple(range(8)), lambda x: (x + 2) % 8, ↵
    ↵inverse=True)
sage: D.inverse_evolution() (1)
7
sage: D.inverse_evolution() (3)
1

sage: D = DiscreteDynamicalSystem(ZZ, lambda x: (x + 2) % 8, inverse=True)
sage: D.inverse_evolution() (1)
7
sage: D.inverse_evolution() (3)
1
```

`inverse_evolution_default(x)`

Return the inverse evolution of `self`, applied to the element `x` of the ground set of `self`.

This is the default implementation, assuming that the orbit of `x` is finite.

EXAMPLES:

```
sage: D = DiscreteDynamicalSystem(tuple(range(8)), lambda x: (x + 2) % 8, ↵
    ↵inverse=True)
sage: D.inverse_evolution_default(1)
7
sage: D.inverse_evolution_default(3)
1
```

`orbit(x, preperiod=False)`

Return the orbit of the element `x` of the ground set of `self`.

This orbit is a list beginning with `x` and ending with the last element until `x` reappears. If `x` never reappears, then this will not terminate!

If the optional argument `preperiod` is set to `True`, then this method returns a pair (o, k) , where o is the orbit of `self`, while k is the smallest nonnegative integer such that $\phi^k(x) \in \{\phi^i(x) \mid i > k\}$. Note that k is necessarily 0, since the DDS `self` is invertible!

EXAMPLES:

```
sage: D = DiscreteDynamicalSystem(tuple(range(8)), lambda x: (x + 2) % 8, ↵
    ↵inverse=True)
sage: D.ground_set()
(0, 1, 2, 3, 4, 5, 6, 7)
sage: D.orbit(2)
[2, 4, 6, 0]
sage: D.orbit(5)
[5, 7, 1, 3]
sage: D.orbit(5, preperiod=True)
([[5, 7, 1, 3], 0]

sage: D = DiscreteDynamicalSystem(ZZ, lambda x: (x + 2) % 8, inverse=True)
sage: D.ground_set()
Integer Ring
sage: D.orbit(2)
```

(continues on next page)

(continued from previous page)

```
[2, 4, 6, 0]
sage: D.orbit(5)
[5, 7, 1, 3]
sage: D.orbit(5, preperiod=True)
([5, 7, 1, 3], 0)
```

verify_inverse_evolution(x=None)

Verify that the composition of evolution and inverse evolution on `self` is the identity (both ways).

The optional argument `x`, if provided, restricts the testing to the element `x` only. Otherwise, all elements of the ground set are tested (if they can be enumerated).

This is mostly used to check the correctness of self-implemented inverse evolution methods.

EXAMPLES:

```
sage: D = DiscreteDynamicalSystem(tuple(range(8)), lambda x: (x + 2) % 8, ↵
    ↵inverse=True)
sage: D.verify_inverse_evolution()
True
sage: D.verify_inverse_evolution(3)
True
sage: fake_inverse = lambda x: x
sage: D = DiscreteDynamicalSystem(tuple(range(8)), lambda x: (x + 2) % 8, ↵
    ↵inverse=fake_inverse)
sage: D.verify_inverse_evolution()
False
sage: D.verify_inverse_evolution(3)
False
```

```
class sage.dynamics.finite_dynamical_system.InvertibleFiniteDynamicalSystem(X,
    phi,
    in-
    verse=None,
    cache_or-
    bits=False,
    cre-
    ate_tu-
    ple=False)
```

Bases: `InvertibleDiscreteDynamicalSystem`, `FiniteDynamicalSystem`

An invertible finite discrete dynamical system.

A *finite discrete dynamical system* (henceforth *FDDS*) is a pair (X, ϕ) of a finite set X and a map $\phi : X \rightarrow X$. This set X is called the *ground set* of the FDDS, while the map ϕ is called the *evolution* of the FDDS. An FDDS (X, ϕ) is called *invertible* if the map ϕ is invertible; in this case, ϕ^{-1} is called the *inverse evolution* of the FDDS.

The ground set X should always be provided as an iterable when defining a `FiniteDynamicalSystem`.

EXAMPLES:

```
sage: from sage.dynamics.finite_dynamical_system import_
    ↵InvertibleFiniteDynamicalSystem
sage: D = InvertibleFiniteDynamicalSystem(tuple(range(5)), lambda x: (x + 2) % 5)
sage: D.ground_set()
(0, 1, 2, 3, 4)
sage: D.evolution() (4)
```

(continues on next page)

(continued from previous page)

```

1
sage: D.orbits()
[[4, 1, 3, 0, 2]]
sage: D.inverse_evolution()(2)
0
sage: D.inverse_evolution()(1)
4
sage: D.evolution_power(-1)(1)
4
sage: D.evolution_power(-2)(1)
2

sage: X = cartesian_product([[0, 1]]*8)
sage: Y = [s for s in X if sum(s) == 4]
sage: rot = lambda s : s[1:] + (s[0],)
sage: D = InvertibleFiniteDynamicalSystem(Y, rot)
sage: D.evolution()((0, 1, 1, 0, 1, 0, 0, 1))
(1, 1, 0, 1, 0, 1, 0)
sage: D.inverse_evolution()((0, 1, 1, 0, 1, 0, 0, 1))
(1, 0, 1, 1, 0, 1, 0)
sage: sorted(D.orbit_lengths())
[2, 4, 8, 8, 8, 8, 8, 8, 8]

```

`cycles()`

Return a list of all cycles of `self`, up to cyclic rotation.

We recall the definition of cycles: Let (X, ϕ) be a DDS. A *cycle* of (X, ϕ) is a finite list $u = (u_1, u_2, \dots, u_k)$ of elements of X such that $\phi(u_i) = u_{i+1}$ for each $i \leq k$, where we set $u_{k+1} = u_1$. Note that any element of X whose orbit is finite has a cycle in its orbit.

Since `self` is invertible, the cycles of `self` are the same as its orbits.

EXAMPLES:

```

sage: D = DiscreteDynamicalSystem(tuple(range(6)), lambda x: (x + 2) % 6,
    ↪inverse=True)
sage: D.cycles()
[[5, 1, 3], [4, 0, 2]]
sage: D = DiscreteDynamicalSystem(tuple(range(6)), lambda x: (x + 3) % 6,
    ↪inverse=True)
sage: D.cycles()
[[5, 2], [4, 1], [3, 0]]

```

`orbit_lengths()`

Return a list of the lengths of all orbits of `self`.

EXAMPLES:

```

sage: D = DiscreteDynamicalSystem(tuple(range(6)), lambda x: (x + 2) % 6,
    ↪inverse=True)
sage: D.orbit_lengths()
[3, 3]
sage: D = DiscreteDynamicalSystem(tuple(range(6)), lambda x: (x + 3) % 6,
    ↪inverse=True)
sage: D.orbit_lengths()
[2, 2, 2]

```

orbits()

Return a list of all orbits of `self`, up to cyclic rotation.

EXAMPLES:

```
sage: D = DiscreteDynamicalSystem(tuple(range(6)), lambda x: (x + 2) % 6, ↵
    ↵inverse=True)
sage: D.orbits()
[[5, 1, 3], [4, 0, 2]]
sage: D = DiscreteDynamicalSystem(tuple(range(6)), lambda x: (x + 3) % 6, ↵
    ↵inverse=True)
sage: D.orbits()
[[5, 2], [4, 1], [3, 0]]
```

CHAPTER
FOUR

SANDPILES

Functions and classes for mathematical sandpiles.

Version: 2.4

AUTHOR:

- David Perkinson (June 4, 2015) Upgraded from version 2.3 to 2.4.

MAJOR CHANGES

1. Eliminated dependence on 4ti2, substituting the use of Polyhedron methods. Thus, no optional packages are necessary.
2. Fixed bug in `Sandpile.__init__` so that now multigraphs are handled correctly.
3. Created `sandpiles` to handle examples of Sandpiles in analogy with `graphs`, `simplicial_complexes`, and `polytopes`. In the process, we implemented a much faster way of producing the sandpile grid graph.
4. Added support for open and closed sandpile Markov chains.
5. Added support for Weierstrass points.
6. Implemented the Cori-Le Borgne algorithm for computing ranks of divisors on complete graphs.

NEW METHODS

Sandpile: `avalanche_polynomial`, `genus`, `group_gens`, `help`, `jacobian_representatives`, `markov_chain`, `picard_representatives`, `smith_form`, `stable_configs`, `stationary_density`, `tutte_polynomial`.

SandpileConfig: `burst_size`, `help`.

SandpileDivisor: `help`, `is_linearly_equivalent`, `is_q_reduced`, `is_weierstrass_pt`, `polytope`, `polytope_integer_pts`, `q_reduced`, `rank`, `simulate_threshold`, `stabilize`, `weierstrass_div`, `weierstrass_gap_seq`, `weierstrass_pts`, `weierstrass_rank_seq`.

MINOR CHANGES

- The `sink` argument to `Sandpile.__init__` now defaults to the first vertex.
- A `SandpileConfig` or `SandpileDivisor` may now be multiplied by an integer.
- Sped up `__add__` method for `SandpileConfig` and `SandpileDivisor`.
- Enhanced string representation of a Sandpile (via `_repr_` and the `name` methods).
- Recurrents for complete graphs and cycle graphs are computed more quickly.
- The stabilization code for `SandpileConfig` has been made more efficient.
- Added optional probability distribution arguments to `add_random` methods.

-
- Marshall Hampton (2010-1-10) modified for inclusion as a module within Sage library.

- David Perkinson (2010-12-14) added show3d(), fixed bug in resolution(), replaced elementary_divisors() with invariant_factors(), added show() for SandpileConfig and SandpileDivisor.
- David Perkinson (2010-9-18): removed is_undirected, added show(), added verbose arguments to several functions to display SandpileConfigs and divisors as lists of integers
- David Perkinson (2010-12-19): created separate SandpileConfig, SandpileDivisor, and Sandpile classes
- David Perkinson (2009-07-15): switched to using config_to_list instead of .values(), thus fixing a few bugs when not using integer labels for vertices.
- David Perkinson (2009): many undocumented improvements
- David Perkinson (2008-12-27): initial version

EXAMPLES:

For general help, enter `Sandpile.help()`, `SandpileConfig.help()`, and `SandpileDivisor.help()`. Miscellaneous examples appear below.

A weighted directed graph given as a Python dictionary:

```
sage: from sage.sandpiles import *
sage: g = {0: {}, 1: {0: 1, 2: 1, 3: 1}, 2: {1: 1, 3: 1, 4: 1}, 3: {1: 1, 2: 1, 4: 1}, 4: {2: 1, 3: 1}}
```

The associated sandpile with 0 chosen as the sink:

```
sage: S = Sandpile(g, 0)
```

Or just:

```
sage: S = Sandpile(g)
```

A picture of the graph:

```
sage: S.show() # long time
↪needs sage.plot
```

The relevant Laplacian matrices:

```
sage: S.laplacian()
[ 0  0  0  0  0]
[-1  3 -1 -1  0]
[ 0 -1  3 -1 -1]
[ 0 -1 -1  3 -1]
[ 0  0 -1 -1  2]
sage: S.reduced_laplacian()
[ 3 -1 -1  0]
[-1  3 -1 -1]
[-1 -1  3 -1]
[ 0 -1 -1  2]
```

The number of elements of the sandpile group for S:

```
sage: S.group_order()
8
```

The structure of the sandpile group:

```
sage: S.invariant_factors()
[1, 1, 1, 8]
```

The elements of the sandpile group for S:

```
sage: S.recurrents()
[{:1: 2, 2: 2, 3: 2, 4: 1},
{:1: 2, 2: 2, 3: 2, 4: 0},
{:1: 2, 2: 1, 3: 2, 4: 0},
{:1: 2, 2: 2, 3: 0, 4: 1},
{:1: 2, 2: 0, 3: 2, 4: 1},
{:1: 2, 2: 2, 3: 1, 4: 0},
{:1: 2, 2: 1, 3: 2, 4: 1},
{:1: 2, 2: 2, 3: 1, 4: 1}]
```

The maximal stable element (2 grains of sand on vertices 1, 2, and 3, and 1 grain of sand on vertex 4):

```
sage: S.max_stable()
{:1: 2, 2: 2, 3: 2, 4: 1}
sage: S.max_stable().values()
[2, 2, 2, 1]
```

The identity of the sandpile group for S:

```
sage: S.identity()
{:1: 2, 2: 2, 3: 2, 4: 0}
```

An arbitrary sandpile configuration:

```
sage: c = SandpileConfig(S, [1, 0, 4, -3])
sage: c.equivalent_recurrent()
{:1: 2, 2: 2, 3: 2, 4: 0}
```

Some group operations:

```
sage: m = S.max_stable()
sage: i = S.identity()
sage: m.values()
[2, 2, 2, 1]
sage: i.values()
[2, 2, 2, 0]
sage: m + i      # coordinate-wise sum
{:1: 4, 2: 4, 3: 4, 4: 1}
sage: m - i
{:1: 0, 2: 0, 3: 0, 4: 1}
sage: m & i    # add, then stabilize
{:1: 2, 2: 2, 3: 2, 4: 1}
sage: e = m + m
sage: e
{:1: 4, 2: 4, 3: 4, 4: 2}
sage: ~e    # stabilize
{:1: 2, 2: 2, 3: 2, 4: 0}
sage: a = -m
sage: a & m
{:1: 0, 2: 0, 3: 0, 4: 0}
sage: a * m    # add, then find the equivalent recurrent
```

(continues on next page)

(continued from previous page)

```
{1: 2, 2: 2, 3: 2, 4: 0}
sage: a^3 # a*a*a
{1: 2, 2: 2, 3: 2, 4: 1}
sage: a^(-1) == m
True
sage: a < m # every coordinate of a is < that of m
True
```

Firing an unstable vertex returns resulting configuration:

```
sage: c = S.max_stable() + S.identity()
sage: c.fire_vertex(1)
{1: 1, 2: 5, 3: 5, 4: 1}
sage: c
{1: 4, 2: 4, 3: 4, 4: 1}
```

Fire all unstable vertices:

```
sage: c.unstable()
[1, 2, 3]
sage: c.fire_unstable()
{1: 3, 2: 3, 3: 3, 4: 3}
```

Stabilize c , returning the resulting configuration and the firing vector:

```
sage: c.stabilize(True)
[{1: 2, 2: 2, 3: 2, 4: 1}, {1: 6, 2: 8, 3: 8, 4: 8}]
sage: c
{1: 4, 2: 4, 3: 4, 4: 1}
sage: S.max_stable() & S.identity() == c.stabilize()
True
```

The number of superstable configurations of each degree:

```
sage: S.h_vector()
[1, 3, 4]
sage: S.postulation()
2
```

the saturated homogeneous toppling ideal:

```
sage: S.ideal()
# needs sage.libs.singular
Ideal (x1 - x0, x3*x2 - x0^2, x4^2 - x0^2, x2^3 - x4*x3*x0,
      x4*x2^2 - x3^2*x0, x3^3 - x4*x2*x0, x4*x3^2 - x2^2*x0) of
Multivariate Polynomial Ring in x4, x3, x2, x1, x0 over Rational Field
```

its minimal free resolution:

```
sage: S.resolution()
# needs sage.libs.singular
'R^1 <-- R^7 <-- R^15 <-- R^13 <-- R^4'
```

and its Betti numbers:

```
sage: S.betti()
needs sage.libs.singular #_
      0   1   2   3   4
-----
0:   1   1   -   -   -
1:   -   2   2   -   -
2:   -   4   13  13   4
-----
total: 1   7   15  13   4
```

Some various ways of creating Sandpiles:

```
sage: S = sandpiles.Complete(4) # for more options enter ``sandpile.TAB``
sage: S = sandpiles.Wheel(6)
```

A multidigraph with loops (vertices 0, 1, 2; for example, there is a directed edge from vertex 2 to vertex 1 of weight 3, which can be thought of as three directed edges of the form (2,3). There is also a single loop at vertex 2 and an edge (2,0) of weight 2):

```
sage: S = Sandpile({0:[1,2], 1:[0,0,2], 2:[0,0,1,1,1,2], 3:[2]})
```

Using the graph library (vertex 1 is specified as the sink; omitting this would make the sink vertex 0 by default):

```
sage: S = Sandpile(graphs.PetersenGraph(), 1)
```

Distribution of avalanche sizes:

```
sage: S = sandpiles.Grid(10,10)
sage: m = S.max_stable()
sage: a = []
sage: for i in range(1000):
....:     m = m.add_random()
....:     m, f = m.stabilize(True)
....:     a.append(sum(f.values()))
sage: # needs sage.plot
sage: p = list_plot([[log(i + 1), log(a.count(i)) ]
....:                 for i in [0..max(a)] if a.count(i)])
sage: p.axes_labels(['log(N)', 'log(D(N))'])
sage: t = text("Distribution of avalanche sizes", (2,2), rgbcolor=(1,0,0))
sage: show(p + t, axes_labels=['log(N)', 'log(D(N))']) # long time
```

Working with sandpile divisors:

```
sage: S = sandpiles.Complete(4)
sage: D = SandpileDivisor(S, [0,0,0,5])
sage: E = D.stabilize(); E
{0: 1, 1: 1, 2: 1, 3: 2}
sage: D.is_linearly_equivalent(E)
True
sage: D.q_reduced()
{0: 4, 1: 0, 2: 0, 3: 1}
sage: S = sandpiles.Complete(4)
sage: D = SandpileDivisor(S, [0,0,0,5])
sage: E = D.stabilize(); E
{0: 1, 1: 1, 2: 1, 3: 2}
sage: D.is_linearly_equivalent(E)
```

(continues on next page)

(continued from previous page)

```

True
sage: D.q_reduced()
{0: 4, 1: 0, 2: 0, 3: 1}
sage: D.rank()
2

sage: # needs sage.geometry.polyhedron
sage: sorted(D.effective_div(), key=str)
[{}0: 0, 1: 0, 2: 0, 3: 5},
 {}0: 0, 1: 0, 2: 4, 3: 1},
 {}0: 0, 1: 4, 2: 0, 3: 1},
 {}0: 1, 1: 1, 2: 1, 3: 2},
 {}0: 4, 1: 0, 2: 0, 3: 1]
sage: sorted(D.effective_div(False))
[[0, 0, 0, 5], [0, 0, 4, 1], [0, 4, 0, 1], [1, 1, 1, 2], [4, 0, 0, 1]]
sage: D.rank()
2
sage: D.rank(True)
(2, {0: 2, 1: 1, 2: 0, 3: 0})
sage: E = D.rank(True)[1] # E proves the rank is not 3
sage: E.values()
[2, 1, 0, 0]
sage: E.deg()
3
sage: rank(D - E)
-1
sage: (D - E).effective_div()
[]

sage: D.weierstrass_pts()
(0, 1, 2, 3)
sage: D.weierstrass_rank_seq(0)
(2, 1, 0, 0, 0, -1)
sage: D.weierstrass_pts()
(0, 1, 2, 3)
sage: D.weierstrass_rank_seq(0)
(2, 1, 0, 0, 0, -1)

```

class sage.sandpiles.Sandpile(*g*, *sink=None*)

Bases: `DiGraph`

Class for Dhar's abelian sandpile model.

all_k_config(*k*)

The constant configuration with all values set to *k*.

INPUT:

- *k* – integer

OUTPUT: SandpileConfig

EXAMPLES:

```

sage: s = sandpiles.Diamond()
sage: s.all_k_config(7)
{1: 7, 2: 7, 3: 7}

```

all_k_div(k)

The divisor with all values set to k .

INPUT:

- k – integer

OUTPUT: SandpileDivisor

EXAMPLES:

```
sage: S = sandpiles.House()
sage: S.all_k_div(7)
{0: 7, 1: 7, 2: 7, 3: 7, 4: 7}
```

avalanche_polynomial (multivariable=True)

The avalanche polynomial. See NOTE for details.

INPUT:

- `multivariable` – boolean (default: True)

OUTPUT: polynomial

EXAMPLES:

```
sage: s = sandpiles.Complete(4)
sage: s.avalanche_polynomial()
# ...
˓needs sage.combinat
9*x0*x1*x2 + 2*x0*x1 + 2*x0*x2 + 2*x1*x2 + 3*x0 + 3*x1 + 3*x2 + 24
sage: s.avalanche_polynomial(False)
# ...
˓needs sage.combinat
9*x0^3 + 6*x0^2 + 9*x0 + 24
```

Note

For each nonsink vertex v , let x_v be an indeterminate. If (r, v) is a pair consisting of a recurrent r and nonsink vertex v , then for each nonsink vertex w , let n_w be the number of times vertex w fires in the stabilization of $r + v$. Let $M(r, v)$ be the monomial $\prod_w x_w^{n_w}$, i.e., the exponent records the vector of n_w as w ranges over the nonsink vertices. The avalanche polynomial is then the sum of $M(r, v)$ as r ranges over the recurrents and v ranges over the nonsink vertices. If `multivariable` is False, then set all the indeterminates equal to each other (and, thus, only count the number of vertex firings in the stabilizations, forgetting which particular vertices fired).

betti (verbose=True)

The Betti table for the homogeneous toppling ideal. If `verbose` is True, it prints the standard Betti table, otherwise, it returns a less formatted table.

INPUT:

- `verbose` – boolean (default: True)

OUTPUT: Betti numbers for the sandpile

EXAMPLES:

```
sage: S = sandpiles.Diamond()
sage: S.betti()
# ...
˓needs sage.libs.singular
```

(continues on next page)

(continued from previous page)

	0	1	2	3
0:	1	—	—	—
1:	—	2	—	—
2:	—	4	9	4
total:	1	6	9	4

```
sage: S.betti(False) #_
→needs sage.libs.singular
[1, 6, 9, 4]
```

betti_complexes()

The support-complexes with non-trivial homology. (See NOTE.)

OUTPUT: list (of pairs [divisors, corresponding simplicial complex])

EXAMPLES:

```
sage: # needs sage.geometry.polyhedron
sage: S = Sandpile({0:{},1:{0: 1, 2: 1, 3: 4},2:{3: 5},3:{1: 1, 2: 1}},0)
sage: p = S.betti_complexes()
sage: p[0]
[0: -8, 1: 5, 2: 4, 3: 1],
Simplicial complex with vertex set (1, 2, 3) and facets {(3,), (1, 2)}]
sage: S.resolution() #_
→needs sage.libs.singular
'R^1 <-- R^5 <-- R^5 <-- R^1'
sage: S.betti() #_
→needs sage.libs.singular
          0   1   2   3
-----
0:     1   —   —   —
1:     —   5   5   —
2:     —   —   —   1
-----
total:   1   5   5   1
sage: len(p)
11
sage: p[0][1].homology()
{0: Z, 1: 0}
sage: p[-1][1].homology()
{0: 0, 1: 0, 2: Z}
```

Note

A support-complex is the simplicial complex formed from the supports of the divisors in a linear system.

burning_config()

The minimal burning configuration.

OUTPUT:

dict (configuration)

EXAMPLES:

```

sage: g = {0:{},1:{0:1,3:1,4:1},2:{0:1,3:1,5:1},
....:      3:{2:1,5:1},4:{1:1,3:1},5:{2:1,3:1}}
sage: S = Sandpile(g,0)
sage: S.burning_config()
{1: 2, 2: 0, 3: 1, 4: 1, 5: 0}
sage: S.burning_config().values()
[2, 0, 1, 1, 0]
sage: S.burning_script()
{1: 1, 2: 3, 3: 5, 4: 1, 5: 4}
sage: script = S.burning_script().values()
sage: script
[1, 3, 5, 1, 4]
sage: matrix(script)*S.reduced_laplacian()
[2 0 1 1 0]

```

Note

The burning configuration and script are computed using a modified version of Speer's script algorithm. This is a generalization to directed multigraphs of Dhar's burning algorithm.

A *burning configuration* is a nonnegative integer-linear combination of the rows of the reduced Laplacian matrix having nonnegative entries and such that every vertex has a path from some vertex in its support. The corresponding *burning script* gives the integer-linear combination needed to obtain the burning configuration. So if b is the burning configuration, σ is its script, and \tilde{L} is the reduced Laplacian, then $\sigma \cdot \tilde{L} = b$. The *minimal burning configuration* is the one with the minimal script (its components are no larger than the components of any other script for a burning configuration).

The following are equivalent for a configuration c with burning configuration b having script σ :

- c is recurrent;
- $c + b$ stabilizes to c ;
- the firing vector for the stabilization of $c + b$ is σ .

burning_script()

A script for the minimal burning configuration.

OUTPUT: dictionary

EXAMPLES:

```

sage: g = {0:{},1:{0:1,3:1,4:1},2:{0:1,3:1,5:1},
....:      3:{2:1,5:1},4:{1:1,3:1},5:{2:1,3:1}}
sage: S = Sandpile(g,0)
sage: S.burning_config()
{1: 2, 2: 0, 3: 1, 4: 1, 5: 0}
sage: S.burning_config().values()
[2, 0, 1, 1, 0]
sage: S.burning_script()
{1: 1, 2: 3, 3: 5, 4: 1, 5: 4}
sage: script = S.burning_script().values()
sage: script
[1, 3, 5, 1, 4]
sage: matrix(script)*S.reduced_laplacian()
[2 0 1 1 0]

```

Note

The burning configuration and script are computed using a modified version of Speer's script algorithm. This is a generalization to directed multigraphs of Dhar's burning algorithm.

A *burning configuration* is a nonnegative integer-linear combination of the rows of the reduced Laplacian matrix having nonnegative entries and such that every vertex has a path from some vertex in its support. The corresponding *burning script* gives the integer-linear combination needed to obtain the burning configuration. So if b is the burning configuration, s is its script, and L_{red} is the reduced Laplacian, then $s \cdot L_{\text{red}} = b$. The *minimal burning configuration* is the one with the minimal script (its components are no larger than the components of any other script for a burning configuration).

The following are equivalent for a configuration c with burning configuration b having script s :

- c is recurrent;
- $c + b$ stabilizes to c ;
- the firing vector for the stabilization of $c + b$ is s .

canonical_divisor()

The canonical divisor. This is the divisor with $\deg(v) - 2$ grains of sand on each vertex (not counting loops). Only for undirected graphs.

OUTPUT: SandpileDivisor

EXAMPLES:

```
sage: S = sandpiles.Complete(4)
sage: S.canonical_divisor()
{0: 1, 1: 1, 2: 1, 3: 1}
sage: s = Sandpile({0:[1,1],1:[0,0,1,1,1]},0)
sage: s.canonical_divisor()  # loops are disregarded
{0: 0, 1: 0}
```

Warning

The underlying graph must be undirected.

dict()

A dictionary of dictionaries representing a directed graph.

OUTPUT: dictionary

EXAMPLES:

```
sage: S = sandpiles.Diamond()
sage: S.dict()
{0: {1: 1, 2: 1},
 1: {0: 1, 2: 1, 3: 1},
 2: {0: 1, 1: 1, 3: 1},
 3: {1: 1, 2: 1}}
sage: S.sink()
0
```

genus()

The genus: (# non-loop edges) - (# vertices) + 1.

This is only defined for undirected graphs.

OUTPUT: integer

EXAMPLES:

```
sage: sandpiles.Complete(4).genus()
3
sage: sandpiles.Cycle(5).genus()
1
```

groebner()

A Groebner basis for the homogeneous toppling ideal. It is computed with respect to the standard sandpile ordering (see `ring`).

OUTPUT: Groebner basis

EXAMPLES:

```
sage: S = sandpiles.Diamond()
sage: S.groebner()
# ...
→needs sage.libs.singular
[x3*x2^2 - x1^2*x0, x2^3 - x3*x1*x0, x3*x1^2 - x2^2*x0,
x1^3 - x3*x2*x0, x3^2 - x0^2, x2*x1 - x0^2]
```

group_gens(verbose=True)

A minimal list of generators for the sandpile group. If `verbose` is `False` then the generators are represented as lists of integers.

INPUT:

- `verbose` – boolean (default: `True`)

OUTPUT:

list of SandpileConfig (or of lists of integers if `verbose` is `False`)

EXAMPLES:

```
sage: s = sandpiles.Cycle(5)
sage: s.group_gens()
[{1: 0, 2: 1, 3: 1, 4: 1}]
sage: s.group_gens()[0].order()
5
sage: s = sandpiles.Complete(5)
sage: s.group_gens(False)
[[2, 3, 2, 2], [2, 2, 3, 2], [2, 2, 2, 3]]
sage: [i.order() for i in s.group_gens()]
[5, 5, 5]
sage: s.invariant_factors()
[1, 5, 5]
```

group_order()

The size of the sandpile group.

OUTPUT: integer

EXAMPLES:

```
sage: S = sandpiles.House()
sage: S.group_order()
11
```

h_vector()

The number of superstable configurations in each degree. Equivalently, this is the list of first differences of the Hilbert function of the (homogeneous) toppling ideal.

OUTPUT: list of nonnegative integers

EXAMPLES:

```
sage: s = sandpiles.Grid(2,2)
sage: s.hilbert_function()
[1, 5, 15, 35, 66, 106, 146, 178, 192]
sage: s.h_vector()
[1, 4, 10, 20, 31, 40, 40, 32, 14]
```

static help(verbose=True)

List of Sandpile-specific methods (not inherited from `Graph`). If `verbose`, include short descriptions.

INPUT:

- `verbose` – boolean (default: True)

OUTPUT: printed string

EXAMPLES:

```
sage: Sandpile.help() # long time
For detailed help with any method FOO listed below,
enter "Sandpile.FOO?" or enter "S.FOO?" for any Sandpile S.

all_k_config           -- The constant configuration with all values set to k.
all_k_div              -- The divisor with all values set to k.
avalanche_polynomial   -- The avalanche polynomial.
betti                 -- The Betti table for the homogeneous toppling ideal.
betti_complexes        -- The support-complexes with non-trivial homology.
burning_config         -- The minimal burning configuration.
burning_script         -- A script for the minimal burning configuration.
canonical_divisor     -- The canonical divisor.
dict                  -- A dictionary of dictionaries representing a directed graph.
genus                 -- The genus: (# non-loop edges) - (# vertices) + 1.
groebner               -- A Groebner basis for the homogeneous toppling ideal.
group_gens             -- A minimal list of generators for the sandpile group.
group_order            -- The size of the sandpile group.
h_vector               -- The number of superstable configurations in each degree.
help                  -- List of Sandpile-specific methods (not inherited from ...Graph...).
hilbert_function        -- The Hilbert function of the homogeneous toppling ideal.
ideal                 -- The saturated homogeneous toppling ideal.
identity               -- The identity configuration.
```

(continues on next page)

(continued from previous page)

in_degree	-- The in-degree of a vertex or a list of all in-degrees.
invariant_factors	-- The invariant factors of the sandpile group.
is_undirected	-- Is the underlying graph undirected?
jacobian_representatives	-- Representatives for the elements of the Jacobian_group.
laplacian	-- The Laplacian matrix of the graph.
markov_chain	-- The sandpile Markov chain for configurations or_divisors.
max_stable	-- The maximal stable configuration.
max_stable_div	-- The maximal stable divisor.
max_superstables	-- The maximal superstable configurations.
min_recurrents	-- The minimal recurrent elements.
nonsink_vertices	-- The nonsink vertices.
nonspecial_divisors	-- The nonspecial divisors.
out_degree	-- The out-degree of a vertex or a list of all out-degrees.
picard_representatives	-- Representatives of the divisor classes of degree_d in the Picard group.
points	-- Generators for the multiplicative group of zeros_of the sandpile ideal.
postulation	-- The postulation number of the toppling ideal.
recurrents	-- The recurrent configurations.
reduced_laplacian	-- The reduced Laplacian matrix of the graph.
reorder_vertices	-- A copy of the sandpile with vertex names permuted.
resolution	-- A minimal free resolution of the homogeneous_toppling ideal.
ring	-- The ring containing the homogeneous toppling_ideal.
show	-- Draw the underlying graph.
show3d	-- Draw the underlying graph.
sink	-- The sink vertex.
smith_form	-- The Smith normal form for the Laplacian.
solve	-- Approximations of the complex affine zeros of the_sandpile ideal.
stable_configs	-- Generator for all stable configurations.
stationary_density	-- The stationary density of the sandpile.
superstables	-- The superstable configurations.
symmetric_recurrents	-- The symmetric recurrent configurations.
tutte_polynomial	-- The Tutte polynomial of the underlying graph.
unsaturated_ideal	-- The unsaturated, homogeneous toppling ideal.
version	-- The version number of Sage Sandpiles.
zero_config	-- The all-zero configuration.
zero_div	-- The all-zero divisor.

hilbert_function()

The Hilbert function of the homogeneous toppling ideal.

OUTPUT: list of nonnegative integers

EXAMPLES:

```
sage: s = sandpiles.Wheel(5)
sage: s.hilbert_function()
[1, 5, 15, 31, 45]
sage: s.h_vector()
[1, 4, 10, 16, 14]
```

ideal (*gens=False*)

The saturated homogeneous toppling ideal. If *gens* is True, the generators for the ideal are returned instead.

INPUT:

- *gens* – boolean (default: False)

OUTPUT: ideal or, optionally, the generators of an ideal

EXAMPLES:

```
sage: S = sandpiles.Diamond()
sage: S.ideal()
# needs sage.libs.singular
Ideal (x2*x1 - x0^2, x3^2 - x0^2, x1^3 - x3*x2*x0,
      x3*x1^2 - x2^2*x0, x2^3 - x3*x1*x0, x3*x2^2 - x1^2*x0)
of Multivariate Polynomial Ring in x3, x2, x1, x0 over Rational Field
sage: S.ideal(True)
# needs sage.libs.singular
[x2*x1 - x0^2, x3^2 - x0^2, x1^3 - x3*x2*x0,
 x3*x1^2 - x2^2*x0, x2^3 - x3*x1*x0, x3*x2^2 - x1^2*x0]
sage: S.ideal().gens() # another way to get the generators
# needs sage.libs.singular
[x2*x1 - x0^2, x3^2 - x0^2, x1^3 - x3*x2*x0,
 x3*x1^2 - x2^2*x0, x2^3 - x3*x1*x0, x3*x2^2 - x1^2*x0]
```

identity (*verbose=True*)

The identity configuration. If *verbose* is False, the configuration is converted to a list of integers.

INPUT:

- *verbose* – boolean (default: True)

OUTPUT: SandpileConfig or a list of integers

EXAMPLES:

```
sage: s = sandpiles.Diamond()
sage: s.identity()
{1: 2, 2: 2, 3: 0}
sage: s.identity(False)
[2, 2, 0]
sage: s.identity() & s.max_stable() == s.max_stable()
True
```

in_degree (*v=None*)

The in-degree of a vertex or a list of all in-degrees.

INPUT:

- *v* – (optional) vertex name

OUTPUT: integer or dict

EXAMPLES:

```
sage: s = sandpiles.House()
sage: s.in_degree()
{0: 2, 1: 2, 2: 3, 3: 3, 4: 2}
sage: s.in_degree(2)
3
```

invariant_factors()

The invariant factors of the sandpile group.

OUTPUT: list of integers

EXAMPLES:

```
sage: s = sandpiles.Grid(2,2)
sage: s.invariant_factors()
[1, 1, 8, 24]
```

is_undirected()

Is the underlying graph undirected? True if (u, v) is an edge if and only if (v, u) is an edge, each edge with the same weight.

OUTPUT: boolean

EXAMPLES:

```
sage: sandpiles.Complete(4).is_undirected()
True
sage: s = Sandpile({0:[1,2], 1:[0,2], 2:[0]}, 0)
sage: s.is_undirected()
False
```

jacobian_representatives(verbose=True)

Representatives for the elements of the Jacobian group. If verbose is False, then lists representing the divisors are returned.

INPUT:

- verbose – boolean (default: True)

OUTPUT: list of SandpileDivisor (or of lists representing divisors)

EXAMPLES:

For an undirected graph, divisors of the form $s - \deg(s) * \text{sink}$ as s varies over the superstable forms a distinct set of representatives for the Jacobian group.:

```
sage: s = sandpiles.Complete(3)
sage: s.superstables(False)
# needs sage.combinat
[[0, 0], [0, 1], [1, 0]]
sage: s.jacobian_representatives(False)
# needs sage.combinat
[[0, 0, 0], [-1, 0, 1], [-1, 1, 0]]
```

If the graph is directed, the representatives described above may be equivalent modulo the rowspan of the Laplacian matrix:

```
sage: s = Sandpile({0: {1: 1, 2: 2}, 1: {0: 2, 2: 4}, 2: {0: 4, 1: 2}},0)
sage: s.group_order()
28
sage: s.jacobian_representatives()
# needs sage.symbolic
[{0: -5, 1: 3, 2: 2}, {0: -4, 1: 3, 2: 1}]
```

Let τ be the nonnegative generator of the kernel of the transpose of the Laplacian, and let τ_{sink} be its sink component, then the sandpile group is isomorphic to the direct sum of the cyclic group of order τ_s and the Jacobian group. In the example above, we have:

```
sage: s.laplacian().left_kernel()
Free module of degree 3 and rank 1 over Integer Ring
Echelon basis matrix:
[14  5  8]
```

Note

The Jacobian group is the set of all divisors of degree zero modulo the integer rowspan of the Laplacian matrix.

laplacian()

The Laplacian matrix of the graph. Its *rows* encode the vertex firing rules.

OUTPUT: matrix

EXAMPLES:

```
sage: G = sandpiles.Diamond()
sage: G.laplacian()
[ 2 -1 -1  0]
[-1  3 -1 -1]
[-1 -1  3 -1]
[ 0 -1 -1  2]
```

Warning

The function `laplacian_matrix` should be avoided. It returns the indegree version of the Laplacian.

markov_chain(state, distrib=None)

The sandpile Markov chain for configurations or divisors. The chain starts at `state`. See NOTE for details.

INPUT:

- `state` – SandpileConfig, SandpileDivisor, or list representing one of these
- `distrib` – (optional) list of nonnegative numbers summing to 1 (representing a prob. dist.)

OUTPUT: generator for Markov chain (see NOTE)

EXAMPLES:

```
sage: s = sandpiles.Complete(4)
sage: m = s.markov_chain([0,0,0])
sage: next(m)          # random
{1: 0, 2: 0, 3: 0}
sage: next(m).values() # random
[0, 0, 0]
sage: next(m).values() # random
[0, 0, 0]
sage: next(m).values() # random
[0, 0, 0]
sage: next(m).values() # random
[0, 1, 0]
sage: next(m).values() # random
[0, 2, 0]
```

(continues on next page)

(continued from previous page)

```

sage: next(m).values() # random
[0, 2, 1]
sage: next(m).values() # random
[1, 2, 1]
sage: next(m).values() # random
[2, 2, 1]
sage: m = s.markov_chain(s.zero_div(), [0.1, 0.1, 0.1, 0.7])
sage: next(m).values() # random
[0, 0, 0, 1]
sage: next(m).values() # random
[0, 0, 1, 1]
sage: next(m).values() # random
[0, 0, 1, 2]
sage: next(m).values() # random
[1, 1, 2, 0]
sage: next(m).values() # random
[1, 1, 2, 1]
sage: next(m).values() # random
[1, 1, 2, 2]
sage: next(m).values() # random
[1, 1, 2, 3]
sage: next(m).values() # random
[1, 1, 2, 4]
sage: next(m).values() # random
[1, 1, 3, 4]

```

Note

The closed sandpile Markov chain has state space consisting of the configurations on a sandpile. It transitions from a state by choosing a vertex at random (according to the probability distribution `distrib`), dropping a grain of sand at that vertex, and stabilizing. If the chosen vertex is the sink, the chain stays at the current state.

The open sandpile Markov chain has state space consisting of the recurrent elements, i.e., the state space is the sandpile group. It transitions from the configuration c by choosing a vertex v at random according to `distrib`. The next state is the stabilization of $c + v$. If v is the sink vertex, then the stabilization of $c + v$ is defined to be c .

Note that in either case, if `distrib` is specified, its length is equal to the total number of vertices (including the sink).

REFERENCES:

- [Lev2014]

`max_stable()`

The maximal stable configuration.

OUTPUT: SandpileConfig (the maximal stable configuration)

EXAMPLES:

```

sage: S = sandpiles.House()
sage: S.max_stable()
{1: 1, 2: 2, 3: 2, 4: 1}

```

max_stable_div()

The maximal stable divisor.

OUTPUT:

SandpileDivisor (the maximal stable divisor)

EXAMPLES:

```
sage: s = sandpiles.Diamond()
sage: s.max_stable_div()
{0: 1, 1: 2, 2: 2, 3: 1}
sage: s.out_degree()
{0: 2, 1: 3, 2: 3, 3: 2}
```

max_superstables (verbose=True)

The maximal superstable configurations. If the underlying graph is undirected, these are the superstables of highest degree. If verbose is False, the configurations are converted to lists of integers.

INPUT:

- verbose – boolean (default: True)

OUTPUT: tuple of SandpileConfig

EXAMPLES:

```
sage: s = sandpiles.Diamond()
sage: s.superstables(False)
[[0, 0, 0],
 [0, 0, 1],
 [1, 0, 1],
 [0, 2, 0],
 [2, 0, 0],
 [0, 1, 1],
 [1, 0, 0],
 [0, 1, 0]]
sage: s.max_superstables(False)
[[1, 0, 1], [0, 2, 0], [2, 0, 0], [0, 1, 1]]
sage: s.h_vector()
[1, 3, 4]
```

min_recurrents (verbose=True)

The minimal recurrent elements. If the underlying graph is undirected, these are the recurrent elements of least degree. If verbose is False, the configurations are converted to lists of integers.

INPUT:

- verbose – boolean (default: True)

OUTPUT: list of SandpileConfig

EXAMPLES:

```
sage: s = sandpiles.Diamond()
sage: s.recurrents(False)
[[2, 2, 1],
 [2, 2, 0],
 [1, 2, 0],
 [2, 0, 1],
 [0, 2, 1],
```

(continues on next page)

(continued from previous page)

```
[2, 1, 0],
[1, 2, 1],
[2, 1, 1]
sage: s.min_recurrents(False)
[[1, 2, 0], [2, 0, 1], [0, 2, 1], [2, 1, 0]]
sage: [i.deg() for i in s.recurrents()]
[5, 4, 3, 3, 3, 4, 4]
```

nonsink_vertices()

The nonsink vertices.

OUTPUT: list of vertices

EXAMPLES:

```
sage: s = sandpiles.Grid(2,3)
sage: s.nonsink_vertices()
[(1, 1), (1, 2), (1, 3), (2, 1), (2, 2), (2, 3)]
```

nonspecial_divisors(*verbose=True*)

The nonspecial divisors. Only for undirected graphs. (See NOTE.)

INPUT:

- *verbose* – boolean (default: True)

OUTPUT: list (of divisors)

EXAMPLES:

```
sage: # needs sage.combinat
sage: S = sandpiles.Complete(4)
sage: ns = S.nonspecial_divisors()
sage: D = ns[0]
sage: D.values() #_
[-1, 0, 1, 2]
sage: D.deg() #_
2
sage: [i.effective_div() for i in ns]
[[], [], [], [], []]
```

Note

The “nonspecial divisors” are those divisors of degree $g - 1$ with empty linear system. The term is only defined for undirected graphs. Here, $g = |E| - |V| + 1$ is the genus of the graph (not counting loops as part of $|E|$). If *verbose* is False, the divisors are converted to lists of integers.

Warning

The underlying graph must be undirected.

out_degree (*v=None*)

The out-degree of a vertex or a list of all out-degrees.

INPUT:

- *v* – (optional) vertex name

OUTPUT: integer or dict

EXAMPLES:

```
sage: s = sandpiles.House()
sage: s.out_degree()
{0: 2, 1: 2, 2: 3, 3: 3, 4: 2}
sage: s.out_degree(2)
3
```

picard_representatives (*d, verbose=True*)

Representatives of the divisor classes of degree *d* in the Picard group. (Also see the documentation for `jacobian_representatives`.)

INPUT:

- *d* – integer
- *verbose* – boolean (default: True)

OUTPUT: slist of SandpileDivisors (or lists representing divisors)

EXAMPLES:

```
sage: s = sandpiles.Complete(3)
sage: s.superstables(False)
# ...
← needs sage.combinat
[[0, 0], [0, 1], [1, 0]]
sage: s.jacobian_representatives(False)
# ...
← needs sage.combinat
[[0, 0, 0], [-1, 0, 1], [-1, 1, 0]]
sage: s.picard_representatives(3, False)
# ...
← needs sage.combinat
[[3, 0, 0], [2, 0, 1], [2, 1, 0]]
```

points()

Generators for the multiplicative group of zeros of the sandpile ideal.

OUTPUT: list of complex numbers

EXAMPLES:

The sandpile group in this example is cyclic, and hence there is a single generator for the group of solutions.

```
sage: S = sandpiles.Complete(4)
sage: S.points()
# ...
← needs sage.symbolic
[[-I, I, 1], [-I, 1, I]]
```

postulation()

The postulation number of the toppling ideal. This is the largest weight of a superstable configuration of the graph.

OUTPUT: nonnegative integer

EXAMPLES:

```
sage: s = sandpiles.Complete(4)
sage: s.postulation()
# needs sage.combinat
3
```

recurrents (*verbose=True*)

The recurrent configurations. If *verbose* is `False`, the configurations are converted to lists of integers.

INPUT:

- *verbose* – boolean (default: `True`)

OUTPUT: list of recurrent configurations

EXAMPLES:

```
sage: r = Sandpile(graphs.HouseXGraph(), 0).recurrents()
sage: r[:3]
[{1: 2, 2: 3, 3: 3, 4: 1}, {1: 1, 2: 3, 3: 3, 4: 0}, {1: 1, 2: 3, 3: 3, 4: 1}]
sage: sandpiles.Complete(4).recurrents(False)
# needs sage.combinat
[[2, 2, 2],
 [2, 2, 1],
 [2, 1, 2],
 [1, 2, 2],
 [2, 2, 0],
 [2, 0, 2],
 [0, 2, 2],
 [2, 1, 1],
 [1, 2, 1],
 [1, 1, 2],
 [2, 1, 0],
 [2, 0, 1],
 [1, 2, 0],
 [1, 0, 2],
 [0, 2, 1],
 [0, 1, 2]]
sage: sandpiles.Cycle(4).recurrents(False)
[[1, 1, 1], [0, 1, 1], [1, 0, 1], [1, 1, 0]]
```

reduced_laplacian()

The reduced Laplacian matrix of the graph.

OUTPUT: matrix

EXAMPLES:

```
sage: S = sandpiles.Diamond()
sage: S.laplacian()
[ 2 -1 -1  0]
[-1  3 -1 -1]
[-1 -1  3 -1]
[ 0 -1 -1  2]
sage: S.reduced_laplacian()
[ 3 -1 -1]
[-1  3 -1]
[-1 -1  2]
```

Note

This is the Laplacian matrix with the row and column indexed by the sink vertex removed.

reorder_vertices()

A copy of the sandpile with vertex names permuted.

After reordering, vertex u comes before vertex v in the list of vertices if u is closer to the sink.

OUTPUT: Sandpile

EXAMPLES:

```
sage: S = Sandpile({0:[1], 2:[0,1], 1:[2]})  
sage: S.dict()  
{0: {1: 1}, 1: {2: 1}, 2: {0: 1, 1: 1}}  
sage: T = S.reorder_vertices()
```

The vertices 1 and 2 have been swapped:

```
sage: T.dict()  
{0: {1: 1}, 1: {0: 1, 2: 1}, 2: {0: 1}}
```

resolution(*verbose=False*)

A minimal free resolution of the homogeneous toppling ideal. If *verbose* is True, then all of the mappings are returned. Otherwise, the resolution is summarized.

INPUT:

- *verbose* – boolean (default: False)

OUTPUT: free resolution of the toppling ideal

EXAMPLES:

```
sage: # needs sage.libs.singular  
sage: S = Sandpile({0: {}, 1: {0: 1, 2: 1, 3: 4}, 2: {3: 5}, 3: {1: 1, 2: 1}},  
...)  
sage: S.resolution() # a Gorenstein sandpile graph  
'R^1 <-- R^5 <-- R^5 <-- R^1'  
sage: S.resolution(True)  
[  
[ x1^2 - x3*x0 x3*x1 - x2*x0 x3^2 - x2*x1 x2*x3 - x0^2 x2^2 - x1*x0],  
  
[ x3 x2 0 x0 0] [ x2^2 - x1*x0]  
[-x1 -x3 x2 0 -x0] [-x2*x3 + x0^2]  
[ x0 x1 0 x2 0] [-x3^2 + x2*x1]  
[ 0 0 -x1 -x3 x2] [x3*x1 - x2*x0]  
[ 0 0 x0 x1 -x3], [ x1^2 - x3*x0]  
]  
sage: r = S.resolution(True)  
sage: r[0]*r[1]  
[0 0 0 0 0]  
sage: r[1]*r[2]  
[0]  
[0]  
[0]  
[0]  
[0]
```

ring()

The ring containing the homogeneous toppling ideal.

OUTPUT: ring

EXAMPLES:

```
sage: S = sandpiles.Diamond()
sage: S.ring()
Multivariate Polynomial Ring in x3, x2, x1, x0 over Rational Field
sage: S.ring().gens()
(x3, x2, x1, x0)
```

Note

The indeterminate x_i corresponds to the i -th vertex as listed by the method `vertices`. The term-ordering is degrevlex with indeterminates ordered according to their distance from the sink (larger indeterminates are further from the sink).

show(kwds)**

Draw the underlying graph.

INPUT:

- kwds – (optional) arguments passed to the show method for Graph or DiGraph

EXAMPLES:

```
sage: S = Sandpile({0:[], 1:[0,3,4], 2:[0,3,5], 3:[2,5], 4:[1,1], 5:[2,4] })
sage: S.show()
# needs sage.plot
sage: S.show(graph_border=True, edge_labels=True)
# needs sage.plot
```

show3d(kwds)**

Draw the underlying graph.

INPUT:

- kwds – (optional) arguments passed to the show method for Graph or DiGraph

EXAMPLES:

```
sage: S = sandpiles.House()
sage: S.show3d()                                     # long time
# needs sage.plot
```

sink()

The sink vertex.

OUTPUT: sink vertex

EXAMPLES:

```
sage: G = sandpiles.House()
sage: G.sink()
0
sage: H = sandpiles.Grid(2,2)
```

(continues on next page)

(continued from previous page)

```
sage: H.sink()
(0, 0)
sage: type(H.sink())
<... 'tuple'>
```

smith_form()

The Smith normal form for the Laplacian. In detail: a list of integer matrices D, U, V such that $ULV = D$ where L is the transpose of the Laplacian, D is diagonal, and U and V are invertible over the integers.

OUTPUT: list of integer matrices

EXAMPLES:

```
sage: s = sandpiles.Complete(4)
sage: D,U,V = s.smith_form()
sage: D
[1 0 0 0]
[0 4 0 0]
[0 0 4 0]
[0 0 0 0]
sage: U*s.laplacian()*V == D  # Laplacian symmetric => transpose not necessary
True
```

solve()

Approximations of the complex affine zeros of the sandpile ideal.

OUTPUT: list of complex numbers

EXAMPLES:

```
sage: S = Sandpile({0: {}, 1: {2: 2}, 2: {0: 4, 1: 1}}, 0)
sage: Z = S.solve(); Z
#_
˓needs sage.libs.singular
[[-0.707107000000000 + 0.707107000000000*I,
 0.707107000000000 - 0.707107000000000*I],
 [-0.707107000000000 - 0.707107000000000*I,
 0.707107000000000 + 0.707107000000000*I],
 [-I, -I],
 [I, I],
 [0.707107000000000 + 0.707107000000000*I,
 -0.707107000000000 - 0.707107000000000*I],
 [0.707107000000000 - 0.707107000000000*I,
 -0.707107000000000 + 0.707107000000000*I],
 [1, 1],
 [-1, -1]]
sage: len(Z)
#_
˓needs sage.libs.singular
8
sage: S.group_order()
8
```

Note

The solutions form a multiplicative group isomorphic to the sandpile group. Generators for this group are given exactly by `points()`.

stable_configs (*smax=None*)

Generator for all stable configurations. If *smax* is provided, then the generator gives all stable configurations less than or equal to *smax*. If *smax* does not represent a stable configuration, then each component of *smax* is replaced by the corresponding component of the maximal stable configuration.

INPUT:

- *smax* – (optional) SandpileConfig or list representing a SandpileConfig

OUTPUT: generator for all stable configurations

EXAMPLES:

```
sage: s = sandpiles.Complete(3)
sage: a = s.stable_configs()
sage: next(a) #_
˓needs sage.combinat
{1: 0, 2: 0}
sage: [i.values() for i in a] #_
˓needs sage.combinat
[[0, 1], [1, 0], [1, 1]]
sage: b = s.stable_configs([1, 0])
sage: list(b) #_
˓needs sage.combinat
[{1: 0, 2: 0}, {1: 1, 2: 0}]
```

stationary_density()

The stationary density of the sandpile.

OUTPUT: rational number

EXAMPLES:

```
sage: s = sandpiles.Complete(3)
sage: s.stationary_density()
10/9

sage: # needs sage.combinat
sage: s = Sandpile(digraphs.DeBruijn(2,2), '00')
sage: s.stationary_density()
9/8
```

Note

The stationary density of a sandpile is the sum $\sum_c (\deg(c) + \deg(s))$ where $\deg(s)$ is the degree of the sink and the sum is over all recurrent configurations.

REFERENCES:

- [Lev2014]

superstables (*verbose=True*)

The superstable configurations. If *verbose* is *False*, the configurations are converted to lists of integers. Superstables for undirected graphs are also known as G-parking functions.

INPUT:

- *verbose* – boolean (default: True)

OUTPUT: list of SandpileConfig

EXAMPLES:

```
sage: sp = Sandpile(graphs.HouseXGraph(), 0).superstables()
sage: sp[:3]
[{}: 0, 2: 0, 3: 0, 4: 0}, {}: 1, 2: 0, 3: 0, 4: 1}, {}: 1, 2: 0, 3: 0, 4: 0}]
sage: sandpiles.Complete(4).superstables(False) #_
˓needs sage.combinat
[[0, 0, 0],
 [0, 0, 1],
 [0, 1, 0],
 [1, 0, 0],
 [0, 0, 2],
 [0, 2, 0],
 [2, 0, 0],
 [0, 1, 1],
 [1, 0, 1],
 [1, 1, 0],
 [0, 1, 2],
 [0, 2, 1],
 [1, 0, 2],
 [1, 2, 0],
 [2, 0, 1],
 [2, 1, 0]]
sage: sandpiles.Cycle(4).superstables(False)
[[0, 0, 0], [1, 0, 0], [0, 1, 0], [0, 0, 1]]
```

symmetric_recurrents (orbits)

The symmetric recurrent configurations.

INPUT:

- orbits – list of lists partitioning the vertices

OUTPUT: list of recurrent configurations

EXAMPLES:

```
sage: S = Sandpile({0: {},
....:             1: {0: 1, 2: 1, 3: 1},
....:             2: {1: 1, 3: 1, 4: 1},
....:             3: {1: 1, 2: 1, 4: 1},
....:             4: {2: 1, 3: 1}})
sage: S.symmetric_recurrents([[1], [2, 3], [4]])
[{}: 2, 2: 2, 3: 2, 4: 1}, {}: 2, 2: 2, 3: 2, 4: 0}]
sage: S.recurrents()
[{}: 2, 2: 2, 3: 2, 4: 1},
 {}: 2, 2: 2, 3: 2, 4: 0},
 {}: 2, 2: 1, 3: 2, 4: 0},
 {}: 2, 2: 2, 3: 0, 4: 1},
 {}: 2, 2: 0, 3: 2, 4: 1},
 {}: 2, 2: 2, 3: 1, 4: 0},
 {}: 2, 2: 1, 3: 2, 4: 1},
 {}: 2, 2: 2, 3: 1, 4: 1}]
```

Note

The user is responsible for ensuring that the list of orbits comes from a group of symmetries of the underlying graph.

tutte_polynomial()

The Tutte polynomial of the underlying graph. Only defined for undirected sandpile graphs.

OUTPUT: polynomial

EXAMPLES:

```
sage: s = sandpiles.Complete(4)
sage: s.tutte_polynomial()
x^3 + y^3 + 3*x^2 + 4*x*y + 3*y^2 + 2*x + 2*y
sage: s.tutte_polynomial().subs(x=1)
y^3 + 3*y^2 + 6*y + 6
sage: s.tutte_polynomial().subs(x=1).coefficients() == s.h_vector()      #_
˓needs sage.combinat
True
```

unsaturated_ideal()

The unsaturated, homogeneous toppling ideal.

OUTPUT: ideal

EXAMPLES:

```
sage: S = sandpiles.Diamond()
sage: S.unsaturated_ideal().gens()
[x1^3 - x3*x2*x0, x2^3 - x3*x1*x0, x3^2 - x2*x1]
sage: S.ideal().gens()      #_
˓needs sage.libs.singular
[x2*x1 - x0^2, x3^2 - x0^2, x1^3 - x3*x2*x0,
 x3*x1^2 - x2^2*x0, x2^3 - x3*x1*x0, x3*x2^2 - x1^2*x0]
```

static version()

The version number of Sage Sandpiles.

OUTPUT: string

EXAMPLES:

```
sage: Sandpile.version()
Sage Sandpiles Version 2.4
sage: S = sandpiles.Complete(3)
sage: S.version()
Sage Sandpiles Version 2.4
```

zero_config()

The all-zero configuration.

OUTPUT: SandpileConfig

EXAMPLES:

```
sage: s = sandpiles.Diamond()
sage: s.zero_config()
{1: 0, 2: 0, 3: 0}
```

zero_div()

The all-zero divisor.

OUTPUT: SandpileDivisor

EXAMPLES:

```
sage: S = sandpiles.House()
sage: S.zero_div()
{0: 0, 1: 0, 2: 0, 3: 0, 4: 0}
```

class sage.sandpiles.sandpile.SandpileConfig(S, c)

Bases: dict

Class for configurations on a sandpile.

add_random(distrib=None)

Add one grain of sand to a random vertex. Optionally, a probability distribution, `distrib`, may be placed on the vertices or the nonsink vertices. See NOTE for details.

INPUT:

- `distrib` – (optional) list of nonnegative numbers summing to 1 (representing a prob. dist.)

OUTPUT: SandpileConfig

EXAMPLES:

```
sage: s = sandpiles.Complete(4)
sage: c = s.zero_config()
sage: c.add_random() # random
{1: 0, 2: 1, 3: 0}
sage: c
{1: 0, 2: 0, 3: 0}
sage: c.add_random([0.1, 0.1, 0.8]) # random
{1: 0, 2: 0, 3: 1}
sage: c.add_random([0.7, 0.1, 0.1, 0.1]) # random
{1: 0, 2: 0, 3: 0}
```

We compute the “sizes” of the avalanches caused by adding random grains of sand to the maximal stable configuration on a grid graph. The function `stabilize()` returns the firing vector of the stabilization, a dictionary whose values say how many times each vertex fires in the stabilization.:

```
sage: S = sandpiles.Grid(10,10)
sage: m = S.max_stable()
sage: a = []
sage: for i in range(1000):
....:     m = m.add_random()
....:     m, f = m.stabilize(True)
....:     a.append(sum(f.values()))

sage: # needs sage.plot
sage: p = list_plot([[log(i + 1), log(a.count(i)) ]
....:                 for i in [0..max(a)] if a.count(i)])
sage: p.axes_labels(['log(N)', 'log(D(N))'])
sage: t = text("Distribution of avalanche sizes", (2,2), rgbcolor=(1,0,0))
sage: show(p + t, axes_labels=['log(N)', 'log(D(N))']) # long time
```

Note

If `distrib` is `None`, then the probability is the uniform probability on the nonsink vertices. Otherwise, there are two possibilities:

(i) the length of `distrib` is equal to the number of vertices, and `distrib` represents a probability distribution on all of the vertices. In that case, the sink may be chosen at random, in which case, the configuration is unchanged.

(ii) Otherwise, the length of `distrib` must be equal to the number of nonsink vertices, and `distrib` represents a probability distribution on the nonsink vertices.

Warning

If `distrib != None`, the user is responsible for assuring the sum of its entries is 1 and that its length is equal to the number of sink vertices or the number of nonsink vertices.

`burst_size(v)`

The burst size of the configuration with respect to the given vertex.

INPUT:

- `v` – vertex

OUTPUT: integer

EXAMPLES:

```
sage: s = sandpiles.Diamond()
sage: [i.burst_size(0) for i in s.recurrents()]
[1, 1, 1, 1, 1, 1, 1, 1]
sage: [i.burst_size(1) for i in s.recurrents()]
[0, 0, 1, 2, 1, 2, 0, 2]
```

Note

To define `c.burst(v)`, if v is not the sink, let c' be the unique recurrent for which the stabilization of $c' + v$ is c . The burst size is then the amount of sand that goes into the sink during this stabilization. If v is the sink, the burst size is defined to be 1.

REFERENCES:

- [Lev2014]

`deg()`

The degree of the configuration.

OUTPUT: integer

EXAMPLES:

```
sage: S = sandpiles.Complete(3)
sage: c = SandpileConfig(S, [1,2])
sage: c.deg()
3
```

dualize()

The difference with the maximal stable configuration.

OUTPUT: SandpileConfig

EXAMPLES:

```
sage: S = sandpiles.Cycle(3)
sage: c = SandpileConfig(S, [1, 2])
sage: S.max_stable()
{1: 1, 2: 1}
sage: c.dualize()
{1: 0, 2: -1}
sage: S.max_stable() == c == c.dualize()
True
```

equivalent_recurrent(*with_firing_vector=False*)

The recurrent configuration equivalent to the given configuration. Optionally, return the corresponding firing vector.

INPUT:

- *with_firing_vector* – boolean (default: False)

OUTPUT: SandpileConfig or [SandpileConfig, firing_vector]

EXAMPLES:

```
sage: S = sandpiles.Diamond()
sage: c = SandpileConfig(S, [0, 0, 0])
sage: c.equivalent_recurrent() == S.identity()
True
sage: x = c.equivalent_recurrent(True)
sage: r = vector([x[0][v] for v in S.nonsink_vertices()])
sage: f = vector([x[1][v] for v in S.nonsink_vertices()])
sage: cv = vector(c.values())
sage: r == cv - f*S.reduced_laplacian()
True
```

Note

Let L be the reduced Laplacian, c the initial configuration, r the returned configuration, and f the firing vector. Then $r = c - f \cdot L$.

equivalent_superstable(*with_firing_vector=False*)

The equivalent superstable configuration. Optionally, return the corresponding firing vector.

INPUT:

- *with_firing_vector* – boolean (default: False)

OUTPUT: SandpileConfig or [SandpileConfig, firing_vector]

EXAMPLES:

```
sage: S = sandpiles.Diamond()
sage: m = S.max_stable()
sage: m.equivalent_superstable().is_superstable()
```

(continues on next page)

(continued from previous page)

```
True
sage: x = m.equivalent_superstable(True)
sage: s = vector(x[0].values())
sage: f = vector(x[1].values())
sage: mv = vector(m.values())
sage: s == mv - f*S.reduced_laplacian()
True
```

Note

Let L be the reduced Laplacian, c the initial configuration, s the returned configuration, and f the firing vector. Then $s = c - f \cdot L$.

`fire_script(sigma)`

Fire the given script. In other words, fire each vertex the number of times indicated by `sigma`.

INPUT:

- `sigma` – SandpileConfig or (list or dict representing a SandpileConfig)

OUTPUT: SandpileConfig

EXAMPLES:

```
sage: S = sandpiles.Cycle(4)
sage: c = SandpileConfig(S, [1,2,3])
sage: c.unstable()
[2, 3]
sage: c.fire_script(SandpileConfig(S, [0,1,1]))
{1: 2, 2: 1, 3: 2}
sage: c.fire_script(SandpileConfig(S, [2,0,0])) == c.fire_vertex(1).fire_
    ↪vertex(1)
True
```

`fire_unstable()`

Fire all unstable vertices.

OUTPUT: SandpileConfig

EXAMPLES:

```
sage: S = sandpiles.Cycle(4)
sage: c = SandpileConfig(S, [1,2,3])
sage: c.fire_unstable()
{1: 2, 2: 1, 3: 2}
```

`fire_vertex(v)`

Fire the given vertex.

INPUT:

- `v` – vertex

OUTPUT: SandpileConfig

EXAMPLES:

```
sage: S = sandpiles.Cycle(3)
sage: c = SandpileConfig(S, [1,2])
sage: c.fire_vertex(2)
{1: 2, 2: 0}
```

static help(verbose=True)

List of SandpileConfig methods. If verbose, include short descriptions.

INPUT:

- verbose – boolean (default: True)

OUTPUT: printed string**EXAMPLES:**

```
sage: SandpileConfig.help()
Shortcuts for SandpileConfig operations:
~c      -- stabilize
c & d -- add and stabilize
c * c -- add and find equivalent recurrent
c^k    -- add k times and find equivalent recurrent
          (taking inverse if k is negative)

For detailed help with any method FOO listed below,
enter "SandpileConfig.FOO?" or enter "c.FOO?" for any SandpileConfig c.

add_random           -- Add one grain of sand to a random vertex.
burst_size           -- The burst size of the configuration with respect to
                     -- the given vertex.
deg                 -- The degree of the configuration.
dualize             -- The difference with the maximal stable
                     -- configuration.
equivalent_recurrent -- The recurrent configuration equivalent to the given
                     -- configuration.
equivalent_superstable -- The equivalent superstable configuration.
fire_script          -- Fire the given script.
fire_unstable         -- Fire all unstable vertices.
fire_vertex          -- Fire the given vertex.
help                -- List of SandpileConfig methods.
is_recurrent         -- Return whether the configuration is recurrent.
is_stable            -- Return whether the configuration is stable.
is_superstable       -- Return whether the configuration is superstable.
is_symmetric         -- Return whether the configuration is symmetric.
order               -- The order of the equivalent recurrent element.
sandpile             -- The configuration's underlying sandpile.
show                -- Show the configuration.
stabilize            -- The stabilized configuration.
support              -- The vertices containing sand.
unstable             -- The unstable vertices.
values               -- The values of the configuration as a list.
```

is_recurrent()

Return whether the configuration is recurrent.

OUTPUT: boolean**EXAMPLES:**

```
sage: S = sandpiles.Diamond()
sage: S.identity().is_recurrent()
True
sage: S.zero_config().is_recurrent()
False
```

is_stable()

Return whether the configuration is stable.

OUTPUT: boolean

EXAMPLES:

```
sage: S = sandpiles.Diamond()
sage: S.max_stable().is_stable()
True
sage: (2*S.max_stable()).is_stable()
False
sage: (S.max_stable() & S.max_stable()).is_stable()
True
```

is_superstable()

Return whether the configuration is superstable.

OUTPUT: boolean

EXAMPLES:

```
sage: S = sandpiles.Diamond()
sage: S.zero_config().is_superstable()
True
```

is_symmetric(*orbits*)

Return whether the configuration is symmetric. Return `True` if the values of the configuration are constant over the vertices in each sublist of *orbits*.

INPUT:

- *orbits* – list of lists of vertices

OUTPUT: boolean

EXAMPLES:

```
sage: S = Sandpile({0: {},
....:                 1: {0: 1, 2: 1, 3: 1},
....:                 2: {1: 1, 3: 1, 4: 1},
....:                 3: {1: 1, 2: 1, 4: 1},
....:                 4: {2: 1, 3: 1}})
sage: c = SandpileConfig(S, [1, 2, 2, 3])
sage: c.is_symmetric([[2,3]])
True
```

order()

The order of the equivalent recurrent element.

OUTPUT: integer

EXAMPLES:

```
sage: S = sandpiles.Diamond()
sage: c = SandpileConfig(S, [2, 0, 1])
sage: c.order()
4
sage: ~c + c + c + c == S.identity()
True
sage: c = SandpileConfig(S, [1, 1, 0])
sage: c.order()
1
sage: c.is_recurrent()
False
sage: c.equivalent_recurrent() == S.identity()
True
```

sandpile()

The configuration's underlying sandpile.

OUTPUT: Sandpile

EXAMPLES:

```
sage: S = sandpiles.Diamond()
sage: c = S.identity()
sage: c.sandpile()
Diamond sandpile graph: 4 vertices, sink = 0
sage: c.sandpile() == S
True
```

show(*sink=True*, *colors=True*, *heights=False*, *directed=None*, *kwds*)**

Show the configuration.

INPUT:

- *sink* – boolean (default: True); whether to show the sink
- *colors* – boolean (default: True); whether to color-code the amount of sand on each vertex
- *heights* – boolean (default: False); whether to label each vertex with the amount of sand
- *directed* – (optional) whether to draw directed edges
- *kwds* – (optional) arguments passed to the show method for Graph

EXAMPLES:

```
sage: S = sandpiles.Diamond()
sage: c = S.identity()
sage: c.show() #_
→needs sage.plot
sage: c.show(directed=False) #_
→needs sage.plot
sage: c.show(sink=False, colors=False, heights=True) #_
→needs sage.plot
```

stabilize(*with_firing_vector=False*)

The stabilized configuration. Optionally returns the corresponding firing vector.

INPUT:

- *with_firing_vector* – boolean (default: False)

OUTPUT: SandpileConfig or [SandpileConfig, firing_vector]

EXAMPLES:

```
sage: S = sandpiles.House()
sage: c = 2*S.max_stable()
sage: c._set_stabilize()
sage: '_stabilize' in c.__dict__
True
sage: S = sandpiles.House()
sage: c = S.max_stable() + S.identity()
sage: c.stabilize(True)
[1: 1, 2: 2, 3: 2, 4: 1}, {1: 2, 2: 2, 3: 3, 4: 3}]
sage: S.max_stable() & S.identity() == c.stabilize()
True
sage: ~c == c.stabilize()
True
```

support()

The vertices containing sand.

OUTPUT: list - support of the configuration

EXAMPLES:

```
sage: S = sandpiles.Diamond()
sage: c = S.identity()
sage: c
{1: 2, 2: 2, 3: 0}
sage: c.support()
[1, 2]
```

unstable()

The unstable vertices.

OUTPUT: list of vertices

EXAMPLES:

```
sage: S = sandpiles.Cycle(4)
sage: c = SandpileConfig(S, [1,2,3])
sage: c.unstable()
[2, 3]
```

values()

The values of the configuration as a list.

The list is sorted in the order of the vertices.

OUTPUT: list of integers

boolean

EXAMPLES:

```
sage: S = Sandpile({'a':['c','b'], 'b':['c','a'], 'c':['a']}, 'a')
sage: c = SandpileConfig(S, {'b':1, 'c':2})
sage: c
{'b': 1, 'c': 2}
sage: c.values()
```

(continues on next page)

(continued from previous page)

```
[1, 2]
sage: S.nonsink_vertices()
['b', 'c']
```

class sage.sandpiles.sandpile.**SandpileDivisor**(*S, D*)

Bases: dict

Class for divisors on a sandpile.

Dcomplex()

The support-complex. (See NOTE.)

OUTPUT: simplicial complex

EXAMPLES:

```
sage: # needs sage.geometry.polyhedron
sage: S = sandpiles.House()
sage: p = SandpileDivisor(S, [1,2,1,0,0]).Dcomplex()
sage: p.homology()
{0: 0, 1: Z x Z, 2: 0}
sage: p.f_vector()
[1, 5, 10, 4]
sage: p.betti()
{0: 1, 1: 2, 2: 0}
```

Note

The “support-complex” is the simplicial complex determined by the supports of the linearly equivalent effective divisors.

add_random(*distrib=None*)

Add one grain of sand to a random vertex.

INPUT:

- *distrib* – (optional) list of nonnegative numbers representing a probability distribution on the vertices

OUTPUT: SandpileDivisor

EXAMPLES:

```
sage: s = sandpiles.Complete(4)
sage: D = s.zero_div()
sage: D.add_random() # random
{0: 0, 1: 0, 2: 1, 3: 0}
sage: D.add_random([0.1,0.1,0.1,0.7]) # random
{0: 0, 1: 0, 2: 0, 3: 1}
```

Warning

If *distrib* is not None, the user is responsible for assuring the sum of its entries is 1.

betti()

The Betti numbers for the support-complex. (See NOTE.)

OUTPUT: dictionary of integers

EXAMPLES:

```
sage: S = sandpiles.Cycle(3)
sage: D = SandpileDivisor(S, [2,0,1])
sage: D.betti()
# needs sage.geometry.polyhedron
{0: 1, 1: 1}
```

Note

The “support-complex” is the simplicial complex determined by the supports of the linearly equivalent effective divisors.

deg()

The degree of the divisor.

OUTPUT: integer

EXAMPLES:

```
sage: S = sandpiles.Cycle(3)
sage: D = SandpileDivisor(S, [1,2,3])
sage: D.deg()
6
```

dualize()

The difference with the maximal stable divisor.

OUTPUT: SandpileDivisor

EXAMPLES:

```
sage: S = sandpiles.Cycle(3)
sage: D = SandpileDivisor(S, [1,2,3])
sage: D.dualize()
{0: 0, 1: -1, 2: -2}
sage: S.max_stable_div() - D == D.dualize()
True
```

effective_div(verbose=True, with_firing_vectors=False)

All linearly equivalent effective divisors. If verbose is False, the divisors are converted to lists of integers. If with_firing_vectors is True then a list of firing vectors is also given, each of which prescribes the vertices to be fired in order to obtain an effective divisor.

INPUT:

- verbose – boolean (default: True)
- with_firing_vectors – boolean (default: False)

OUTPUT: list (of divisors)

EXAMPLES:

```

sage: # needs sage.geometry.polyhedron
sage: s = sandpiles.Complete(4)
sage: D = SandpileDivisor(s, [4,2,0,0])
sage: sorted(D.effective_div(), key=str)
[{0: 0, 1: 2, 2: 0, 3: 4},
 {0: 0, 1: 2, 2: 4, 3: 0},
 {0: 0, 1: 6, 2: 0, 3: 0},
 {0: 1, 1: 3, 2: 1, 3: 1},
 {0: 2, 1: 0, 2: 2, 3: 2},
 {0: 4, 1: 2, 2: 0, 3: 0}]
sage: sorted(D.effective_div(False))
[[0, 2, 0, 4],
 [0, 2, 4, 0],
 [0, 6, 0, 0],
 [1, 3, 1, 1],
 [2, 0, 2, 2],
 [4, 2, 0, 0]]
sage: sorted(D.effective_div(with_firing_vectors=True), key=str)
[({0: 0, 1: 2, 2: 0, 3: 4}, (0, -1, -1, -2)),
 ({0: 0, 1: 2, 2: 4, 3: 0}, (0, -1, -2, -1)),
 ({0: 0, 1: 6, 2: 0, 3: 0}, (0, -2, -1, -1)),
 ({0: 1, 1: 3, 2: 1, 3: 1}, (0, -1, -1, -1)),
 ({0: 2, 1: 0, 2: 2, 3: 2}, (0, 0, -1, -1)),
 ({0: 4, 1: 2, 2: 0, 3: 0}, (0, 0, 0, 0))]
sage: a =_[2]
sage: a[0].values()
[0, 6, 0, 0]
sage: vector(D.values()) - s.laplacian()*a[1]
(0, 6, 0, 0)
sage: sorted(D.effective_div(False, True))
[[[0, 2, 0, 4], (0, -1, -1, -2)),
 [[0, 2, 4, 0], (0, -1, -2, -1)),
 [[0, 6, 0, 0], (0, -2, -1, -1)),
 [[1, 3, 1, 1], (0, -1, -1, -1)),
 [[2, 0, 2, 2], (0, 0, -1, -1)),
 [[4, 2, 0, 0], (0, 0, 0, 0)]]
sage: D = SandpileDivisor(s, [-1,0,0,0])
sage: D.effective_div(False, True)
[]

```

fire_script(sigma)

Fire the given script. In other words, fire each vertex the number of times indicated by sigma.

INPUT:

- sigma – SandpileDivisor or (list or dict representing a SandpileDivisor)

OUTPUT: SandpileDivisor

EXAMPLES:

```

sage: S = sandpiles.Cycle(3)
sage: D = SandpileDivisor(S, [1,2,3])
sage: D.unstable()
[1, 2]
sage: D.fire_script([0,1,1])
{0: 3, 1: 1, 2: 2}
sage: D.fire_script(SandpileDivisor(S, [2,0,0])) == D.fire_vertex(0).fire_

```

(continues on next page)

(continued from previous page)

```
vertex(0)
True
```

fire_unstable()

Fire all unstable vertices.

OUTPUT: SandpileDivisor

EXAMPLES:

```
sage: S = sandpiles.Cycle(3)
sage: D = SandpileDivisor(S, [1,2,3])
sage: D.fire_unstable()
{0: 3, 1: 1, 2: 2}
```

fire_vertex(v)

Fire the given vertex.

INPUT:

- v – vertex

OUTPUT: SandpileDivisor

EXAMPLES:

```
sage: S = sandpiles.Cycle(3)
sage: D = SandpileDivisor(S, [1,2,3])
sage: D.fire_vertex(1)
{0: 2, 1: 0, 2: 4}
```

static help(verbose=True)

List of SandpileDivisor methods. If verbose, include short descriptions.

INPUT:

- verbose – boolean (default: True)

OUTPUT: printed string

EXAMPLES:

```
sage: SandpileDivisor.help()
For detailed help with any method FOO listed below,
enter "SandpileDivisor.FOO?" or enter "D.FOO?" for any SandpileDivisor D.

Dcomplex           -- The support-complex.
add_random         -- Add one grain of sand to a random vertex.
betti              -- The Betti numbers for the support-complex.
deg                -- The degree of the divisor.
dualize            -- The difference with the maximal stable divisor.
effective_div     -- All linearly equivalent effective divisors.
fire_script        -- Fire the given script.
fire_unstable      -- Fire all unstable vertices.
fire_vertex        -- Fire the given vertex.
help               -- List of SandpileDivisor methods.
is_alive            -- Return whether the divisor is stabilizable.
is_linearly_equivalent -- Return whether the given divisor is linearly_
                           ~equivalent.
```

(continues on next page)

(continued from previous page)

```

is_q_reduced          -- Return whether the divisor is q-reduced.
is_symmetric          -- Return whether the divisor is symmetric.
is_weierstrass_pt     -- Return whether the given vertex is a Weierstrass_
                        ↗ point.
polytope               -- The polytope determining the complete linear system.
polytope_integer_pts  -- The integer points inside divisor's polytope.
q_reduced              -- The linearly equivalent q-reduced divisor.
rank                   -- The rank of the divisor.
sandpile               -- The divisor's underlying sandpile.
show                   -- Show the divisor.
simulate_threshold     -- The first unstabilizable divisor in the closed_
                        ↗ Markov chain.
stabilize              -- The stabilization of the divisor.
support                -- List of vertices at which the divisor is nonzero.
unstable               -- The unstable vertices.
values                 -- The values of the divisor as a list.
weierstrass_div         -- The Weierstrass divisor.
weierstrass_gap_seq    -- The Weierstrass gap sequence at the given vertex.
weierstrass_pts         -- The Weierstrass points (vertices).
weierstrass_rank_seq   -- The Weierstrass rank sequence at the given vertex.

```

is_alive(cycle=False)

Return whether the divisor is stabilizable. In other words, will the divisor stabilize under repeated firings of all unstable vertices? Optionally returns the resulting cycle.

INPUT:

- cycle – boolean (default: False)

OUTPUT: boolean or optionally, a list of SandpileDivisors

EXAMPLES:

```

sage: S = sandpiles.Complete(4)
sage: D = SandpileDivisor(S, {0: 4, 1: 3, 2: 3, 3: 2})
sage: D.is_alive()
True
sage: D.is_alive(True)
[{0: 4, 1: 3, 2: 3, 3: 2}, {0: 3, 1: 2, 2: 2, 3: 5}, {0: 1, 1: 4, 2: 4, 3: 3}]

```

is_linearly_equivalent(D, with_firing_vector=False)

Return whether the given divisor is linearly equivalent. Optionally, returns the firing vector. (See NOTE.)

INPUT:

- D – SandpileDivisor or list, tuple, etc. representing a divisor
- with_firing_vector – boolean (default: False)

OUTPUT: boolean or integer vector

EXAMPLES:

```

sage: s = sandpiles.Complete(3)
sage: D = SandpileDivisor(s,[2,0,0])
sage: D.is_linearly_equivalent([0,1,1])
True
sage: D.is_linearly_equivalent([0,1,1],True)
(0, -1, -1)

```

(continues on next page)

(continued from previous page)

```
sage: v = vector(D.is_linearly_equivalent([0,1,1],True))
sage: vector(D.values()) - s.laplacian()*v
(0, 1, 1)
sage: D.is_linearly_equivalent([0,0,0])
False
sage: D.is_linearly_equivalent([0,0,0],True)
()
```

Note

- If `with_firing_vector` is `False`, returns either `True` or `False`.
- If `with_firing_vector` is `True` then: (i) if `self` is linearly equivalent to `D`, returns a vector `v` such that `self - v*self.laplacian().transpose() = D`. Otherwise, (ii) if `self` is not linearly equivalent to `D`, the output is the empty vector, `()`.

`is_q_reduced()`

Return whether the divisor is q -reduced. This would mean that $self = c + kq$ where c is superstable, k is an integer, and q is the sink vertex.

OUTPUT: boolean

EXAMPLES:

```
sage: s = sandpiles.Complete(4)
sage: D = SandpileDivisor(s,[2,-3,2,0])
sage: D.is_q_reduced()
False
sage: SandpileDivisor(s,[10,0,1,2]).is_q_reduced()
True
```

For undirected or, more generally, Eulerian graphs, q -reduced divisors are linearly equivalent if and only if they are equal. The same does not hold for general directed graphs:

```
sage: s = Sandpile({0:[1],1:[1,1]}) 
sage: D = SandpileDivisor(s,[-1,1])
sage: Z = s.zero_div()
sage: D.is_q_reduced()
True
sage: Z.is_q_reduced()
True
sage: D == Z
False
sage: D.is_linearly_equivalent(Z)
True
```

`is_symmetric(orbits)`

Return whether the divisor is symmetric. Return `True` if the values of the configuration are constant over the vertices in each sublist of `orbits`.

INPUT:

- `orbits` – list of lists of vertices

OUTPUT: boolean

EXAMPLES:

```
sage: S = sandpiles.House()
sage: S.dict()
{0: {1: 1, 2: 1},
 1: {0: 1, 3: 1},
 2: {0: 1, 3: 1, 4: 1},
 3: {1: 1, 2: 1, 4: 1},
 4: {2: 1, 3: 1}}
sage: D = SandpileDivisor(S, [0,0,1,1,3])
sage: D.is_symmetric([[2,3], [4]])
True
```

is_weierstrass_pt ($v='sink'$)

Return whether the given vertex is a Weierstrass point.

INPUT:

- v – (default: sink) vertex

OUTPUT: boolean

EXAMPLES:

```
sage: # needs sage.geometry.polyhedron
sage: s = sandpiles.House()
sage: K = s.canonical_divisor()
sage: K.weierstrass_rank_seq() # sequence at the sink vertex, 0
(1, 0, -1)
sage: K.is_weierstrass_pt()
False
sage: K.weierstrass_rank_seq(4)
(1, 0, 0, -1)
sage: K.is_weierstrass_pt(4)
True
```

Note

The vertex v is a (generalized) Weierstrass point for divisor D if the sequence of ranks $r(D - nv)$ for $n = 0, 1, 2, \dots$ is not $r(D), r(D) - 1, \dots, 0, -1, -1, \dots$

polytope()

The polytope determining the complete linear system.

OUTPUT: polytope

EXAMPLES:

```
sage: # needs sage.geometry.polyhedron
sage: s = sandpiles.Complete(4)
sage: D = SandpileDivisor(s, [4,2,0,0])
sage: p = D.polytope()
sage: p.inequalities()
(An inequality (-3, 1, 1) x + 2 >= 0,
 An inequality (1, 1, 1) x + 4 >= 0,
 An inequality (1, -3, 1) x + 0 >= 0,
 An inequality (1, 1, -3) x + 0 >= 0)
```

(continues on next page)

(continued from previous page)

```
sage: D = SandpileDivisor(s, [-1, 0, 0, 0])
sage: D.polytope()
The empty polyhedron in QQ^3
```

Note

For a divisor D , this is the intersection of (i) the polyhedron determined by the system of inequalities $L^t x \leq D$ where L^t is the transpose of the Laplacian with (ii) the hyperplane $x_{\text{sink_vertex}} = 0$. The polytope is thought of as sitting in $(n - 1)$ -dimensional Euclidean space where n is the number of vertices.

`polytope_integer_pts()`

The integer points inside divisor's polytope. The polytope referred to here is the one determining the divisor's complete linear system (see the documentation for `polytope`).

OUTPUT: tuple of integer vectors

EXAMPLES:

```
sage: s = sandpiles.Complete(4)
sage: D = SandpileDivisor(s, [4, 2, 0, 0])
sage: sorted(D.polytope_integer_pts())
# ...
[(-2, -1, -1),
 (-1, -2, -1),
 (-1, -1, -2),
 (-1, -1, -1),
 (0, -1, -1),
 (0, 0, 0)]
sage: D = SandpileDivisor(s, [-1, 0, 0, 0])
sage: D.polytope_integer_pts()
# ...
()
```

`q_reduced(verbose=True)`

The linearly equivalent q -reduced divisor.

INPUT:

- `verbose` – boolean (default: True)

OUTPUT: SandpileDivisor or list representing SandpileDivisor

EXAMPLES:

```
sage: s = sandpiles.Complete(4)
sage: D = SandpileDivisor(s, [2, -3, 2, 0])
sage: D.q_reduced()
{0: -2, 1: 1, 2: 2, 3: 0}
sage: D.q_reduced(False)
[-2, 1, 2, 0]
```

Note

The divisor D is *qreduced* if $D = c + kq$ where c is superstable, k is an integer, and q is the sink.

rank (with_witness=False)

The rank of the divisor. Optionally returns an effective divisor E such that $D - E$ is not winnable (has an empty complete linear system).

INPUT:

- `with_witness` – boolean (default: `False`)

OUTPUT: integer or (integer, SandpileDivisor)

EXAMPLES:

```
sage: # needs sage.geometry.polyhedron
sage: S = sandpiles.Complete(4)
sage: D = SandpileDivisor(S, [4,2,0,0])
sage: D.rank()
3
sage: D.rank(True)
(3, {0: 3, 1: 0, 2: 1, 3: 0})
sage: E = _[1]
sage: (D - E).rank()
-1
˓→ # needs sage.rings.number_field
```

Riemann–Roch theorem::

```
sage: # needs sage.geometry.polyhedron
sage: D.rank() - (S.canonical_divisor() - D).rank() == D.deg() + 1 - S.
˓→genus()
True
```

Riemann–Roch theorem::

```
sage: # needs sage.geometry.polyhedron
sage: D.rank() - (S.canonical_divisor() - D).rank() == D.deg() + 1 - S.
˓→genus()
True
sage: S = Sandpile({0:[1,1,1,2],1:[0,0,0,1,1,1,2,2],2:[2,2,1,1,0]},0) # ˓→
˓→multigraph with loops
sage: D = SandpileDivisor(S, [4,2,0])
sage: D.rank(True)
(2, {0: 1, 1: 1, 2: 1})
sage: S = Sandpile({0:[1,2], 1:[0,2,2], 2: [0,1]},0) # directed graph
sage: S.is_undirected()
False
sage: D = SandpileDivisor(S, [0,2,0])
sage: D.effective_div()
[{0: 0, 1: 2, 2: 0}, {0: 2, 1: 0, 2: 0}]
sage: D.rank(True)
(0, {0: 0, 1: 0, 2: 1})
sage: E = D.rank(True)[1]
sage: (D - E).effective_div()
˓→ # needs sage.rings.number_field
[]
```

Note

The rank of a divisor D is -1 if D is not linearly equivalent to an effective divisor (i.e., the dollar game

represented by D is unwinnable). Otherwise, the rank of D is the largest integer r such that $D - E$ is linearly equivalent to an effective divisor for all effective divisors E with $\deg(E) = r$.

sandpile()

The divisor's underlying sandpile.

OUTPUT: Sandpile

EXAMPLES:

```
sage: S = sandpiles.Diamond()
sage: D = SandpileDivisor(S, [1, -2, 0, 3])
sage: D.sandpile()
Diamond sandpile graph: 4 vertices, sink = 0
sage: D.sandpile() == S
True
```

show(*heights=True, directed=None, **kwds*)

Show the divisor.

INPUT:

- *heights* – boolean (default: `True`); whether to label each vertex with the amount of sand
- *directed* – (optional) whether to draw directed edges
- *kwds* – (optional) arguments passed to the `show` method for Graph

EXAMPLES:

```
sage: S = sandpiles.Diamond()
sage: D = SandpileDivisor(S, [1, -2, 0, 2])
sage: D.show(graph_border=True, vertex_size=700, directed=False)
# needs sage.plot
```

simulate_threshold(*distrib=None*)

The first unstabilizable divisor in the closed Markov chain. (See NOTE.)

INPUT:

- *distrib* – (optional) list of nonnegative numbers representing a probability distribution on the vertices

OUTPUT: SandpileDivisor

EXAMPLES:

```
sage: s = sandpiles.Complete(4)
sage: D = s.zero_div()
sage: D.simulate_threshold() # random
{0: 2, 1: 3, 2: 1, 3: 2}
sage: n(mean([D.simulate_threshold().deg() for _ in range(10)])) # random
7.10000000000000
sage: n(s.stationary_density()*s.num_verts())
6.93750000000000
```

Note

Starting at `self`, repeatedly choose a vertex and add a grain of sand to it. Return the first unstabilizable divisor that is reached. Also see the `markov_chain` method for the underlying sandpile.

stabilize (with_firing_vector=False)

The stabilization of the divisor. If not stabilizable, return an error.

INPUT:

- `with_firing_vector` – boolean (default: `False`)

EXAMPLES:

```
sage: s = sandpiles.Complete(4)
sage: D = SandpileDivisor(s, [0, 3, 0, 0])
sage: D.stabilize()
{0: 1, 1: 0, 2: 1, 3: 1}
sage: D.stabilize(with_firing_vector=True)
[0: 1, 1: 0, 2: 1, 3: 1}, {0: 0, 1: 1, 2: 0, 3: 0}]
```

support ()

List of vertices at which the divisor is nonzero.

OUTPUT: list representing the support of the divisor

EXAMPLES:

```
sage: S = sandpiles.Cycle(4)
sage: D = SandpileDivisor(S, [0, 0, 1, 1])
sage: D.support()
[2, 3]
sage: S.vertices(sort=True)
[0, 1, 2, 3]
```

unstable ()

The unstable vertices.

OUTPUT: list of vertices

EXAMPLES:

```
sage: S = sandpiles.Cycle(3)
sage: D = SandpileDivisor(S, [1, 2, 3])
sage: D.unstable()
[1, 2]
```

values ()

The values of the divisor as a list.

The list is sorted in the order of the vertices.

OUTPUT: list of integers

boolean

EXAMPLES:

```
sage: S = Sandpile({'a':['c','b'], 'b':['c','a'], 'c':['a']}, 'a')
sage: D = SandpileDivisor(S, {'a':0, 'b':1, 'c':2})
sage: D
```

(continues on next page)

(continued from previous page)

```
{'a': 0, 'b': 1, 'c': 2}
sage: D.values()
[0, 1, 2]
sage: S.vertices(sort=True)
['a', 'b', 'c']
```

weierstrass_div(*verbose=True*)

The Weierstrass divisor. Its value at a vertex is the weight of that vertex as a Weierstrass point. (See `SandpileDivisor.weierstrass_gap_seq`.)

INPUT:

- `verbose` – boolean (default: True)

OUTPUT: SandpileDivisor

EXAMPLES:

```
sage: s = sandpiles.Diamond()
sage: D = SandpileDivisor(s, [4, 2, 1, 0])
sage: [D.weierstrass_rank_seq(v) for v in s] #_
→needs sage.geometry.polyhedron
[(5, 4, 3, 2, 1, 0, 0, -1),
 (5, 4, 3, 2, 1, 0, -1),
 (5, 4, 3, 2, 1, 0, 0, -1),
 (5, 4, 3, 2, 1, 0, 0, -1)]
sage: D.weierstrass_div() #_
→needs sage.geometry.polyhedron
{0: 1, 1: 0, 2: 2, 3: 1}
sage: k5 = sandpiles.Complete(5)
sage: K = k5.canonical_divisor()
sage: K.weierstrass_div()
{0: 9, 1: 9, 2: 9, 3: 9, 4: 9}
```

weierstrass_gap_seq(*v='sink'*, `weight=True`)

The Weierstrass gap sequence at the given vertex. If `weight` is True, then also compute the weight of each gap value.

INPUT:

- `v` – (default: sink) vertex
- `weight` – boolean (default: True)

OUTPUT: list or (list of list) of integers

EXAMPLES:

```
sage: # needs sage.geometry.polyhedron
sage: s = sandpiles.Cycle(4)
sage: D = SandpileDivisor(s, [2, 0, 0, 0])
sage: [D.weierstrass_gap_seq(v, False) for v in s.vertices(sort=True)]
[(1, 3), (1, 2), (1, 3), (1, 2)]
sage: [D.weierstrass_gap_seq(v) for v in s.vertices(sort=True)]
[((1, 3), 1), ((1, 2), 0), ((1, 3), 1), ((1, 2), 0)]
sage: D.weierstrass_gap_seq() # gap sequence at sink vertex, 0
((1, 3), 1)
sage: D.weierstrass_rank_seq() # rank sequence at the sink vertex
(1, 0, 0, -1)
```

Note

The integer k is a Weierstrass gap for the divisor D at vertex v if the rank of $D - (k-1)v$ does not equal the rank of $D - kv$. Let r be the rank of D and let k_i be the i -th gap at v . The Weierstrass weight of v for D is the sum of $(k_i - i)$ as i ranges from 1 to $r + 1$. It measure the difference between the sequence $r, r-1, \dots, 0, -1, -1, \dots$ and the rank sequence $\text{rank}(D), \text{rank}(D-v), \text{rank}(D-2v), \dots$

`weierstrass_pts` (*with_rank_seq=False*)

The Weierstrass points (vertices). Optionally, return the corresponding rank sequences.

INPUT:

- `with_rank_seq` – boolean (default: `False`)

OUTPUT: tuple of vertices or list of (vertex, rank sequence)

EXAMPLES:

```
sage: s = sandpiles.House()
sage: K = s.canonical_divisor()
sage: K.weierstrass_pts() #_
˓needs sage.geometry.polyhedron
(4, )
sage: K.weierstrass_pts(True) #_
˓needs sage.geometry.polyhedron
[ (4, (1, 0, 0, -1)) ]
```

Note

The vertex v is a (generalized) Weierstrass point for divisor D if the sequence of ranks $r(D-nv)$ for $n = 0, 1, 2, \dots$ is not $r(D), r(D)-1, \dots, 0, -1, -1, \dots$

`weierstrass_rank_seq` (*v='sink'*)

The Weierstrass rank sequence at the given vertex. Computes the rank of the divisor $D - nv$ starting with $n = 0$ and ending when the rank is -1 .

INPUT:

- `v` – (default: `sink`) vertex

OUTPUT: tuple of int

EXAMPLES:

```
sage: s = sandpiles.House()
sage: K = s.canonical_divisor()
sage: [K.weierstrass_rank_seq(v) for v in s.vertices(sort=True)] #_
˓needs sage.geometry.polyhedron
[(1, 0, -1), (1, 0, -1), (1, 0, -1), (1, 0, -1), (1, 0, 0, -1)]
```

`sage.sandpiles.sandpile.admissible_partitions` (*S, k*)

The partitions of the vertices of S into k parts, each of which is connected.

INPUT:

- `S` – Sandpile
- `k` – integer

OUTPUT: partitions

EXAMPLES:

```
sage: from sage.sandpiles.sandpile import admissible_partitions
sage: from sage.sandpiles.sandpile import partition_sandpile
sage: S = sandpiles.Cycle(4)
sage: P = [list(admissible_partitions(S, i)) for i in [2, 3, 4]]  
# needs sage.combinat
sage: P  
# needs sage.combinat
[[{{0, 2, 3}, {1}},  
 {{0, 3}, {1, 2}},  
 {{0, 1, 3}, {2}},  
 {{0}, {1, 2, 3}},  
 {{0, 1}, {2, 3}},  
 {{0, 1, 2}, {3}}],  
 [{{0, 3}, {1}, {2}},  
 {{0}, {1}, {2, 3}},  
 {{0}, {1, 2}, {3}},  
 {{0, 1}, {2}, {3}}],  
 [{{0}, {1}, {2}, {3}}]]
sage: for p in P:  
 # needs sage.combinat
....:     sum([partition_sandpile(S, i).betti(verbose=False)[-1] for i in p])
6
8
3
sage: S.betti()  
# needs sage.libs.singular
      0      1      2      3
-----
 0:    1    -
 1:    -    6    8    3
-----
total:   1     6     8     3
```

`sage.sandpiles.sandpile.aztec_sandpile(n)`

The aztec diamond graph.

INPUT:

- `n` – integer

OUTPUT: dictionary for the aztec diamond graph

EXAMPLES:

```
sage: from sage.sandpiles.sandpile import aztec_sandpile
sage: T = aztec_sandpile(2)
sage: sorted(len(v) for u, v in T.items())
[3, 3, 3, 3, 3, 3, 3, 4, 4, 4, 4, 4, 8]
sage: Sandpile(T, (0, 0)).group_order()
4542720
```

Note

This is the aztec diamond graph with a sink vertex added. Boundary vertices have edges to the sink so that each

vertex has degree 4.

```
sage.sandpiles.sandpile.firing_graph(S, eff)
```

Create a digraph with divisors as vertices and edges between two divisors D and E if firing a single vertex in D gives E .

INPUT:

- S – Sandpile
- eff – list of divisors

OUTPUT: DiGraph

EXAMPLES:

```
sage: S = sandpiles.Cycle(6)
sage: D = SandpileDivisor(S, [1,1,1,1,2,0])
sage: eff = D.effective_div() #_
˓needs sage.geometry.polyhedron
sage: firing_graph(S, eff).show3d(edge_size=.005, # long time,_
˓needs sage.geometry.polyhedron sage.plot
....: vertex_size=0.01)
```

```
sage.sandpiles.sandpile.glue_graphs(g, h, glue_g, glue_h)
```

Glue two graphs together.

INPUT:

- g, h – dictionaries for directed multigraphs
- $\text{glue}_h, \text{glue}_g$ – dictionaries for a vertex

OUTPUT: dictionary for a directed multigraph

EXAMPLES:

```
sage: from sage.sandpiles.sandpile import glue_graphs
sage: x = {0: {}, 1: {0: 1}, 2: {0: 1, 1: 1}, 3: {0: 1, 1: 1, 2: 1}}
sage: y = {0: {}, 1: {0: 2}, 2: {1: 2}, 3: {0: 1, 2: 1}}
sage: glue_x = {1: 1, 3: 2}
sage: glue_y = {0: 1, 1: 2, 3: 1}
sage: z = glue_graphs(x,y,glue_x,glue_y); z
{'sink': {},
 'x0': {'sink': 1, 'x1': 1, 'x3': 2, 'y1': 2, 'y3': 1},
 'x1': {'x0': 1},
 'x2': {'x0': 1, 'x1': 1},
 'x3': {'x0': 1, 'x1': 1, 'x2': 1},
 'y1': {'sink': 2},
 'y2': {'y1': 2},
 'y3': {'sink': 1, 'y2': 1}}
sage: S = Sandpile(z,'sink')
sage: S.h_vector()
[1, 6, 17, 31, 41, 41, 31, 17, 6, 1] #_
˓needs sage.libs.singular
'R^1 <-- R^7 <-- R^21 <-- R^35 <-- R^35 <-- R^21 <-- R^7 <-- R^1'
```

Note

This method makes a dictionary for a graph by combining those for g and h . The sink of g is replaced by a vertex that is connected to the vertices of g as specified by `glue_g` the vertices of h as specified in `glue_h`. The sink of the glued graph is 'sink'.

Both `glue_g` and `glue_h` are dictionaries with entries of the form $v : w$ where v is the vertex to be connected to and w is the weight of the connecting edge.

```
sage.sandpiles.sandpile.min_cycles(G, v)
```

Minimal length cycles in the digraph G starting at vertex v .

INPUT:

- G – DiGraph
- v – vertex of G

OUTPUT: list of lists of vertices

EXAMPLES:

```
sage: from sage.sandpiles.sandpile import min_cycles, sandlib
sage: T = sandlib('gor')
sage: [min_cycles(T, i) for i in T.vertices(sort=True)]
[[], [[1, 3]], [[2, 3, 1], [2, 3]], [[3, 1], [3, 2]]]
```

```
sage.sandpiles.sandpile.parallel_firing_graph(S, eff)
```

Create a digraph with divisors as vertices and edges between two divisors D and E if firing all unstable vertices in D gives E .

INPUT:

- S – Sandpile
- eff – list of divisors

OUTPUT: DiGraph

EXAMPLES:

```
sage: S = sandpiles.Cycle(6)
sage: D = SandpileDivisor(S, [1,1,1,1,2,0])
sage: eff = D.effective_div() #_
  ↵needs sage.geometry.polyhedron
sage: parallel_firing_graph(S, eff).show3d(edge_size=.005,      # long time,_
  ↵needs sage.geometry.polyhedron sage.plot
....:                                     vertex_size=0.01)
```

```
sage.sandpiles.sandpile.partition_sandpile(S, p)
```

Each set of vertices in p is regarded as a single vertex, with an edge between A and B if some element of A is connected by an edge to some element of B in S .

INPUT:

- S – Sandpile
- p – partition of the vertices of S

OUTPUT: Sandpile

EXAMPLES:

```
sage: from sage.sandpiles.sandpile import admissible_partitions, partition_
    ↵ sandpile
sage: S = sandpiles.Cycle(4)
sage: P = [list(admissible_partitions(S, i)) for i in [2, 3, 4]] #_
    ↵ needs sage.combinat
sage: for p in P: #_
    ↵ needs sage.combinat
....:     sum([partition_sandpile(S, i).betti(verbose=False)[-1] for i in p])
6
8
3
sage: S.betti() #_
    ↵ needs sage.libs.singular
      0      1      2      3
-----
 0:    1      -      -      -
 1:      -      6      8      3
-----
total:    1      6      8      3
```

`sage.sandpiles.sandpile(selector=None)`

Return the sandpile identified by `selector`. If no argument is given, a description of the sandpiles in the sandlib is printed.

INPUT:

- `selector` – (optional) identifier or None

OUTPUT: Sandpile or description

EXAMPLES:

```
sage: from sage.sandpiles.sandpile import sandlib
sage: sandlib()
Sandpiles in the sandlib:
    ci1 : complete intersection, non-DAG but equivalent to a DAG
    generic : generic digraph with 6 vertices
    genus2 : Undirected graph of genus 2
    gor : Gorenstein but not a complete intersection
    kite : generic undirected graphs with 5 vertices
    riemann-roch1 : directed graph with postulation 9 and 3 maximal weight_
    ↵ superstables
    riemann-roch2 : directed graph with a superstable not majorized by a maximal_
    ↵ superstable
sage: S = sandlib('gor')
sage: S.resolution() #_
    ↵ needs sage.libs.singular
'R^1 <-- R^5 <-- R^5 <-- R^1'
```

`sage.sandpiles.sandpile.triangle_sandpile(n)`

A triangular sandpile. Each nonsink vertex has out-degree six. The vertices on the boundary of the triangle are connected to the sink.

INPUT:

- `n` – integer

OUTPUT: Sandpile

EXAMPLES:

```
sage: from sage.sandpiles.sandpile import triangle_sandpile
sage: T = triangle_sandpile(5)
sage: T.group_order()
135418115000
```

`sage.sandpiles.sandpile.wilmes_algorithm(M)`

Compute an integer matrix L with the same integer row span as M and such that L is the reduced Laplacian of a directed multigraph.

INPUT:

- M – square integer matrix of full rank

OUTPUT: integer matrix (L)

EXAMPLES:

```
sage: P = matrix([[2,3,-7,-3],[5,2,-5,5],[8,2,5,4],[-5,-9,6,6]])
sage: wilmes_algorithm(P)
[ 3279   -79  -1599 -1600]
[    -1   1539   -136 -1402]
[     0     -1   1650 -1649]
[     0       0  -1658  1658]
```

REFERENCES:

- [PPW2013]

See also

- `sage.combinat.e_one_star`
- `sage.combinat.constellation`

ARITHMETIC DYNAMICAL SYSTEMS

5.1 Generic dynamical systems on schemes

This is the generic class for dynamical systems and contains the exported constructor functions. The constructor functions can take either polynomials (or rational functions in the affine case) or morphisms from which to construct a dynamical system. If the domain is not specified, it is constructed. However, if you plan on working with points or subvarieties in the domain, it recommended to specify the domain. For products of projective spaces the domain must be specified.

The initialization checks are always performed by the constructor functions. It is possible, but not recommended, to skip these checks by calling the class initialization directly.

AUTHORS:

- Ben Hutz (July 2017): initial version

```
class sage.dynamics.arithmetic_dynamics.generic_ds.DynamicalSystem(polys_or_rat_fncts,  
domain)
```

Bases: `SchemeMorphism_polynomial`

Base class for dynamical systems of schemes.

INPUT:

- `polys_or_rat_fncts` – list of polynomials or rational functions, all of which should have the same parent
- `domain` – an affine or projective scheme, or product of projective schemes, on which `polys` defines an endomorphism (Subschemes are also ok)
- `names` – (default: `('X', 'Y')`) tuple of strings to be used as coordinate names for a projective space that is constructed

The following combinations of `morphism_or_polys` and `domain` are meaningful:

- `morphism_or_polys` is a `SchemeMorphism`; `domain` is ignored in this case
- `morphism_or_polys` is a list of homogeneous polynomials that define a rational endomorphism of `domain`
- `morphism_or_polys` is a list of homogeneous polynomials and `domain` is unspecified; `domain` is then taken to be the projective space of appropriate dimension over the common parent of the elements in `morphism_or_polys`
- `morphism_or_polys` is a single polynomial or rational function; `domain` is ignored and taken to be a 1-dimensional projective space over the base ring of `morphism_or_polys` with coordinate names given by `names`

EXAMPLES:

```
sage: A.<x> = AffineSpace(QQ, 1)
sage: f = DynamicalSystem_affine([x^2 + 1])
sage: type(f)
<class 'sage.dynamics.arithmetic_dynamics.affine_ds.DynamicalSystem_affine_field'>
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem_projective([x^2 + y^2, y^2])
sage: type(f)
<class 'sage.dynamics.arithmetic_dynamics.projective_ds.DynamicalSystem_
projective_field'>
```

```
sage: P1.<x,y> = ProjectiveSpace(CC, 1)
sage: H = End(P1)
sage: DynamicalSystem(H([y, x]))
Dynamical System of Projective Space of dimension 1 over Complex Field
with 53 bits of precision
Defn: Defined on coordinates by sending (x : y) to (y : x)
```

DynamicalSystem defaults to projective:

```
sage: R.<x,y,z> = QQ[]
sage: DynamicalSystem([x^2, y^2, z^2])
Dynamical System of Projective Space of dimension 2 over Rational Field
Defn: Defined on coordinates by sending (x : y : z) to
(x^2 : y^2 : z^2)
```

```
sage: A.<x,y> = AffineSpace(QQ, 2)
sage: DynamicalSystem([y, x], domain=A)
Dynamical System of Affine Space of dimension 2 over Rational Field
Defn: Defined on coordinates by sending (x, y) to (y, x)
sage: H = End(A)
sage: DynamicalSystem(H([y, x]))
Dynamical System of Affine Space of dimension 2 over Rational Field
Defn: Defined on coordinates by sending (x, y) to (y, x)
```

Note that domain is ignored if an endomorphism is passed in:

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: P2.<x,y> = ProjectiveSpace(CC, 1)
sage: H = End(P2)
sage: f = H([CC.0*x^2, y^2])
sage: g = DynamicalSystem(f, domain=P)
sage: g.domain()
Projective Space of dimension 1 over Complex Field with 53 bits of precision
```

Constructing a common parent:

```
sage: P.<x,y> = ProjectiveSpace(ZZ, 1)
sage: DynamicalSystem([CC.0*x^2, 4/5*y^2])
Dynamical System of
Projective Space of dimension 1 over Complex Field with 53 bits of precision
Defn: Defined on coordinates by sending (x : y) to
(1.00000000000000*I*x^2 : 0.800000000000000*y^2)

sage: # needs sage.rings.finite_rings
sage: P.<x,y> = ProjectiveSpace(GF(5), 1)
```

(continues on next page)

(continued from previous page)

```
sage: K.<t> = GF(25)
sage: DynamicalSystem([GF(5)(3)*x^2, K(t)*y^2])
Dynamical System of Projective Space of dimension 1 over Finite Field in t of
˓→size 5^2
Defn: Defined on coordinates by sending (x : y) to
(-2*x^2 : t*y^2)
```

as_scheme_morphism()

Return this dynamical system as `SchemeMorphism_polynomial`.

OUTPUT: `SchemeMorphism_polynomial`

EXAMPLES:

```
sage: P.<x,y,z> = ProjectiveSpace(ZZ, 2)
sage: f = DynamicalSystem_projective([x^2, y^2, z^2])
sage: type(f.as_scheme_morphism())
<class 'sage.schemes.projective.projective_morphism.SchemeMorphism_polynomial_
˓→projective_space'>
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem_projective([x^2 - y^2, y^2])
sage: type(f.as_scheme_morphism())
<class 'sage.schemes.projective.projective_morphism.SchemeMorphism_polynomial_
˓→projective_space_field'>
```

```
sage: P.<x,y> = ProjectiveSpace(GF(5), 1)
sage: f = DynamicalSystem_projective([x^2, y^2])
sage: type(f.as_scheme_morphism())
<class 'sage.schemes.projective.projective_morphism.SchemeMorphism_polynomial_
˓→projective_space_finite_field'>
```

```
sage: A.<x,y> = AffineSpace(ZZ, 2)
sage: f = DynamicalSystem_affine([x^2 - 2, y^2])
sage: type(f.as_scheme_morphism())
<class 'sage.schemes.affine.affine_morphism.SchemeMorphism_polynomial_affine_
˓→space'>
```

```
sage: A.<x,y> = AffineSpace(QQ, 2)
sage: f = DynamicalSystem_affine([x^2 - 2, y^2])
sage: type(f.as_scheme_morphism())
<class 'sage.schemes.affine.affine_morphism.SchemeMorphism_polynomial_affine_
˓→space_field'>
```

```
sage: A.<x,y> = AffineSpace(GF(3), 2)
sage: f = DynamicalSystem_affine([x^2 - 2, y^2])
sage: type(f.as_scheme_morphism())
<class 'sage.schemes.affine.affine_morphism.SchemeMorphism_polynomial_affine_
˓→space_finite_field'>
```

change_ring(*R*, *check=True*)

Return a new dynamical system which is this map coerced to *R*.

If *check* is `True`, then the initialization checks are performed.

INPUT:

- R – ring or morphism

OUTPUT:

A new `DynamicalSystem_projective` that is this map coerced to R .

EXAMPLES:

```
sage: P.<x,y> = ProjectiveSpace(ZZ, 1)
sage: f = DynamicalSystem_projective([3*x^2, y^2])
sage: f.change_ring(GF(5))
Dynamical System of Projective Space of dimension 1 over Finite Field of size 5
Defn: Defined on coordinates by sending (x : y) to (-2*x^2 : y^2)
```

`field_of_definition_critical`(*return_embedding=False*, *simplify_all=False*, *names='a'*)

Return smallest extension of the base field which contains the critical points.

Ambient space of dynamical system must be either the affine line or projective line over a number field or finite field.

INPUT:

- `return_embedding` – boolean (default: `False`); if `True`, return an embedding of base field of dynamical system into the returned number field or finite field. Note that computing this embedding might be expensive.
- `simplify_all` – boolean (default: `False`); if `True`, simplify intermediate fields and also the resulting number field. Note that this is not implemented for finite fields and has no effect.
- `names` – (optional) string to be used as generator for returned number field or finite field

OUTPUT:

If `return_embedding` is `False`, the field of definition as an absolute number field or finite field. If `return_embedding` is `True`, a tuple (K, ϕ) where ϕ is an embedding of the base field in K .

EXAMPLES:

Note that the number of critical points is $2d - 2$, but $(1 : 0)$ has multiplicity 2 in this case:

```
sage: # needs sage.libs.singular sage.rings.number_field
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem([1/3*x^3 + x*y^2, y^3], domain=P)
sage: f.critical_points()
[(1 : 0)]
sage: N.<a> = f.field_of_definition_critical(); N
Number Field in a with defining polynomial x^2 + 1
sage: g = f.change_ring(N)
sage: g.critical_points()
[(-a : 1), (a : 1), (1 : 0)]
```

```
sage: # needs sage.libs.singular sage.rings.number_field
sage: A.<z> = AffineSpace(QQ, 1)
sage: f = DynamicalSystem([z^4 + 2*z^2 + 2], domain=A)
sage: K.<a> = f.field_of_definition_critical(); K
Number Field in a with defining polynomial z^2 + 1
```

```
sage: # needs sage.libs.singular sage.rings.finite_rings
sage: G.<a> = GF(9)
sage: R.<z> = G[]
```

(continues on next page)

(continued from previous page)

```

sage: R.irreducible_element(3, algorithm='first_lexicographic')
z^3 + (a + 1)*z + a
sage: A.<x> = AffineSpace(G, 1)
sage: f = DynamicalSystem([x^4 + (2*a+2)*x^2 + a*x], domain=A)
sage: f[0].derivative(x).univariate_polynomial().is_irreducible()
True
sage: f.field_of_definition_critical(return_embedding=True, names='b')
(Finite Field in b of size 3^6,
 Ring morphism:
   From: Finite Field in a of size 3^2
   To:   Finite Field in b of size 3^6
   Defn: a |--> 2*b^5 + 2*b^3 + b^2 + 2*b + 2)

```

field_of_definition_periodic(*n*, *formal=False*, *return_embedding=False*, *simplify_all=False*, *names='a'*)

Return smallest extension of the base field which contains all fixed points of the *n*-th iterate

Ambient space of dynamical system must be either the affine line or projective line over a number field or finite field.

INPUT:

- *n* – positive integer
- *formal* – boolean (default: *False*); *True* signals to return number field or finite field over which the formal periodic points are defined, where a formal periodic point is a root of the *n*-th dynatomic polynomial. *False* specifies to find number field or finite field over which all periodic points of the *n*-th iterate are defined.
- *return_embedding* – boolean (default: *False*); if *True*, return an embedding of base field of dynamical system into the returned number field or finite field. Note that computing this embedding might be expensive.
- *simplify_all* – boolean (default: *False*); if *True*, simplify intermediate fields and also the resulting number field. Note that this is not implemented for finite fields and has no effect.
- *names* – (optional) string to be used as generator for returned number field or finite field

OUTPUT:

If *return_embedding* is *False*, the field of definition as an absolute number field or finite field. If *return_embedding* is *True*, a tuple (*K*, *phi*) where *phi* is an embedding of the base field in *K*.

EXAMPLES:

```

sage: # needs sage.libs.singular sage.rings.number_field
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem([x^2, y^2], domain=P)
sage: f.periodic_points(3, minimal=False)
[(0 : 1), (1 : 0), (1 : 1)]
sage: N.<a> = f.field_of_definition_periodic(3); N
Number Field in a with defining polynomial x^6 + x^5 + x^4 + x^3 + x^2 + x + 1
sage: sorted(f.periodic_points(3, minimal=False, R=N), key=str)
[(-a^5 - a^4 - a^3 - a^2 - a - 1 : 1),
 (0 : 1),
 (1 : 0),
 (1 : 1),
 (a : 1),
 (a^2 : 1),

```

(continues on next page)

(continued from previous page)

```
(a^3 : 1),
(a^4 : 1),
(a^5 : 1)]
```

```
sage: # needs sage.libs.singular sage.rings.number_field
sage: A.<z> = AffineSpace(QQ, 1)
sage: f = DynamicalSystem([(z^2 + 1)/(2*z + 1)], domain=A)
sage: K.<a> = f.field_of_definition_periodic(2); K
Number Field in a with defining polynomial z^4 + 12*z^3 + 39*z^2 + 18*z + 171
sage: F.<b> = f.field_of_definition_periodic(2, formal=True); F
Number Field in b with defining polynomial z^2 + 3*z + 6
```

```
sage: # needs sage.rings.finite_rings
sage: G.<a> = GF(4)
sage: A.<x> = AffineSpace(G, 1)
sage: f = DynamicalSystem([x^2 + (a+1)*x + 1], domain=A)
sage: g = f.nth_iterate_map(2)[0]
sage: (g-x).univariate_polynomial().factor()
(x + 1) * (x + a + 1) * (x^2 + a*x + 1)
sage: f.field_of_definition_periodic(2, return_embedding=True, names='b')
(Finite Field in b of size 2^4,
Ring morphism:
From: Finite Field in a of size 2^2
To: Finite Field in b of size 2^4
Defn: a |--> b^2 + b)
```

field_of_definition_preimage (*point, n, return_embedding=False, simplify_all=False, names='a'*)

Return smallest extension of the base field which contains the *n*-th preimages of *point*

Ambient space of dynamical system must be either the affine line or projective line over a number field or finite field.

INPUT:

- *point* – a point in this map's domain
- *n* – positive integer
- *return_embedding* – boolean (default: `False`); if `True`, return an embedding of base field of dynamical system into the returned number field or finite field. Note that computing this embedding might be expensive.
- *simplify_all* – boolean (default: `False`); if `True`, simplify intermediate fields and also the resulting number field. Note that this is not implemented for finite fields and has no effect.
- *names* – (optional) string to be used as generator for returned number field or finite field

OUTPUT:

If *return_embedding* is `False`, the field of definition as an absolute number field or finite field. If *return_embedding* is `True`, a tuple *(K, phi)* where *phi* is an embedding of the base field in *K*.

EXAMPLES:

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem([1/3*x^2 + 2/3*x*y, x^2 - 2*y^2], domain=P)
sage: N.<a> = f.field_of_definition_preimage(P(1,1), 2, #_
... needs sage.rings.number_field
....: simplify_all=True); N
```

(continues on next page)

(continued from previous page)

```
Number Field in a with defining polynomial
x^8 - 4*x^7 - 128*x^6 + 398*x^5 + 3913*x^4 - 8494*x^3 - 26250*x^2 + 30564*x -
→ 2916
```

```
sage: A.<z> = AffineSpace(QQ, 1)
sage: f = DynamicalSystem([z^2], domain=A)
sage: K.<a> = f.field_of_definition_preimage(A(1), 3); K          #_
→needs sage.rings.number_field
Number Field in a with defining polynomial z^4 + 1
```

```
sage: G = GF(5)
sage: P.<x,y> = ProjectiveSpace(G, 1)
sage: f = DynamicalSystem([x^2 + 2*y^2, y^2], domain=P)
sage: f.field_of_definition_preimage(P(2,1), 2, return_embedding=True,      #_
→needs sage.rings.number_field
....:                                         names='a')
(Finite Field in a of size 5^2,
Ring morphism:
From: Finite Field of size 5
To:   Finite Field in a of size 5^2
Defn: 1 |--> 1)
```

specialization (*D=None, phi=None, homset=None*)

Specialization of this dynamical system.

Given a family of maps defined over a polynomial ring. A specialization is a particular member of that family. The specialization can be specified either by a dictionary or a SpecializationMorphism.

INPUT:

- *D* – (optional) dictionary
- *phi* – (optional) SpecializationMorphism
- *homset* – (optional) homset of specialized map

OUTPUT: *DynamicalSystem*

EXAMPLES:

```
sage: R.<c> = PolynomialRing(QQ)
sage: P.<x,y> = ProjectiveSpace(R, 1)
sage: f = DynamicalSystem_projective([x^2 + c*y^2, y^2], domain=P)
sage: f.specialization({c:1})
Dynamical System of Projective Space of dimension 1 over Rational Field
Defn: Defined on coordinates by sending (x : y) to (x^2 + y^2 : y^2)
```

5.2 Dynamical systems on affine schemes

An endomorphism of an affine scheme or subscheme determined by polynomials or rational functions.

The main constructor function is given by `DynamicalSystem_affine`. The constructor function can take polynomials, rational functions, or morphisms from which to construct a dynamical system. If the domain is not specified, it is constructed. However, if you plan on working with points or subvarieties in the domain, it recommended to specify the domain.

The initialization checks are always performed by the constructor functions. It is possible, but not recommended, to skip these checks by calling the class initialization directly.

AUTHORS:

- David Kohel, William Stein
- Volker Braun (2011-08-08): Renamed classes, more documentation, misc cleanups.
- Ben Hutz (2017) relocate code and create new class

```
class sage.dynamics.arithmetic_dynamics.affine_ds.DynamicalSystem_affine(polys_or_rat_fncts,
do-
main)
```

Bases: `SchemeMorphism_polynomial_affine_space`, `DynamicalSystem`

An endomorphism of affine schemes determined by rational functions.

Warning

You should not create objects of this class directly because no type or consistency checking is performed. The preferred method to construct such dynamical systems is to use `DynamicalSystem_affine()` function.

INPUT:

- `morphism_or_polys` – a `SchemeMorphism`, a polynomial, a rational function, or a list or tuple of polynomials or rational functions
- `domain` – (optional) affine space or subscheme of such; the following combinations of `morphism_or_polys` and `domain` are meaningful:
 - `morphism_or_polys` is a `SchemeMorphism`; `domain` is ignored in this case
 - `morphism_or_polys` is a list of polynomials or rational functions that define a rational endomorphism of `domain`
 - `morphism_or_polys` is a list of polynomials or rational functions and `domain` is unspecified; `domain` is then taken to be the affine space of appropriate dimension over the common base ring, if one exists, of the elements of `morphism_or_polys`
 - `morphism_or_polys` is a single polynomial or rational function; `domain` is ignored and assumed to be the 1-dimensional affine space over the base ring of `morphism_or_polys`

OUTPUT: `DynamicalSystem_affine`

EXAMPLES:

```
sage: A3.<x,y,z> = AffineSpace(QQ, 3)
sage: DynamicalSystem_affine([x, y, 1])
Dynamical System of Affine Space of dimension 3 over Rational Field
```

(continues on next page)

(continued from previous page)

```
Defn: Defined on coordinates by sending (x, y, z) to
      (x, y, 1)
```

```
sage: R.<x,y> = QQ[]
sage: DynamicalSystem_affine([x/y, y^2 + 1])
Dynamical System of Affine Space of dimension 2 over Rational Field
Defn: Defined on coordinates by sending (x, y) to
      (x/y, y^2 + 1)
```

```
sage: R.<t> = ZZ[]
sage: DynamicalSystem_affine(t^2 - 1)
Dynamical System of Affine Space of dimension 1 over Integer Ring
Defn: Defined on coordinates by sending (t) to
      (t^2 - 1)
```

```
sage: A.<x,y> = AffineSpace(QQ, 2)
sage: X = A.subscheme([x-y^2])
sage: DynamicalSystem_affine([9/4*x^2, 3/2*y], domain=X)
Dynamical System of Closed subscheme of Affine Space of dimension 2 over Rational Field
Defn: Defined on coordinates by sending (x, y) to
      (9/4*x^2, 3/2*y)
```

```
sage: A.<x,y> = AffineSpace(QQ, 2)
sage: H = End(A)
sage: f = H([x^2, y^2])
sage: DynamicalSystem_affine(f)
Dynamical System of Affine Space of dimension 2 over Rational Field
Defn: Defined on coordinates by sending (x, y) to
      (x^2, y^2)
```

Notice that $\mathbb{Z}\mathbb{Z}$ becomes $\mathbb{Q}\mathbb{Q}$ since the function is rational:

```
sage: A.<x,y> = AffineSpace(ZZ, 2)
sage: DynamicalSystem_affine([3*x^2/(5*y), y^2/(2*x^2)])
Dynamical System of Affine Space of dimension 2 over Rational Field
Defn: Defined on coordinates by sending (x, y) to
      (3*x^2/(5*y), y^2/(2*x^2))
```

```
sage: A.<x,y> = AffineSpace(QQ, 2)
sage: DynamicalSystem_affine([3/2*x^2, y^2])
Dynamical System of Affine Space of dimension 2 over Rational Field
Defn: Defined on coordinates by sending (x, y) to
      (3/2*x^2, y^2)
```

If you pass in quotient ring elements, they are reduced:

```
sage: # needs sage.libs.singular
sage: A.<x,y,z> = AffineSpace(QQ, 3)
sage: X = A.subscheme([x - y])
sage: u,v,w = X.coordinate_ring().gens()
sage: DynamicalSystem_affine([u, v, u+v], domain=X)
Dynamical System of Closed subscheme of Affine Space of dimension 3
over Rational Field defined by:
```

(continues on next page)

(continued from previous page)

```
x - y
Defn: Defined on coordinates by sending (x, y, z) to
(y, y, 2*y)
```

```
sage: # needs sage.libs.singular
sage: R.<t> = PolynomialRing(QQ)
sage: A.<x,y,z> = AffineSpace(R, 3)
sage: X = A.subscheme(x^2 - y^2)
sage: H = End(X)
sage: f = H([x^2/(t*y), t*y^2, x*z])
sage: DynamicalSystem_affine(f)
Dynamical System of Closed subscheme of Affine Space of dimension 3
over Univariate Polynomial Ring in t over Rational Field defined by:
x^2 - y^2
Defn: Defined on coordinates by sending (x, y, z) to
(x^2/(t*y), t*y^2, x*z)
```

```
sage: x = var('x') #_
˓needs sage.symbolic
sage: DynamicalSystem_affine(x^2 + 1) #_
˓needs sage.symbolic
Traceback (most recent call last):
...
TypeError: symbolic ring cannot be the base ring
```

conjugate(*M*)

Conjugate this dynamical system by *M*, i.e. $M^{-1} \circ f \circ M$.

If possible the new map will be defined over the same space. Otherwise, will try to coerce to the base ring of *M*.

INPUT:

- *M* – a square invertible matrix

OUTPUT: an affine dynamical system

EXAMPLES:

```
sage: A.<t> = AffineSpace(QQ, 1)
sage: f = DynamicalSystem_affine([t^2 + 1])
sage: f.conjugate(matrix([[1,2], [0,1]]))
Dynamical System of Affine Space of dimension 1 over Rational Field
Defn: Defined on coordinates by sending (t) to
(t^2 + 4*t + 3)
```

```
sage: A.<x,y> = AffineSpace(ZZ, 2)
sage: f = DynamicalSystem_affine([x^3 + y^3, y^2])
sage: f.conjugate(matrix([[1,2,3], [0,1,2], [0,0,1]]))
Dynamical System of Affine Space of dimension 2 over Integer Ring
Defn: Defined on coordinates by sending (x, y) to
(x^3 + 6*x^2*y + 12*x*y^2 + 9*y^3
+ 9*x^2 + 36*x*y + 40*y^2 + 27*x + 58*y + 28, y^2 + 4*y + 2)
```

```
sage: # needs sage.rings.number_field
sage: R.<x> = PolynomialRing(QQ)
```

(continues on next page)

(continued from previous page)

```
sage: K.<i> = NumberField(x^2 + 1)
sage: A.<x> = AffineSpace(ZZ, 1)
sage: f = DynamicalSystem_affine([x^3 + 2*x^2 + 3])
sage: f.conjugate(matrix([[i,i], [0,-i]]))
Dynamical System of Affine Space of dimension 1 over Integer Ring
Defn: Defined on coordinates by sending (x) to
      (x^3 + x^2 - x - 5)
```

degree()

Return the degree of the affine dynamical system.

EXAMPLES:

```
sage: # needs sage.rings.number_field
sage: R.<c> = QuadraticField(7)
sage: A.<x,y,z> = AffineSpace(R, 3)
sage: f = DynamicalSystem_affine([x^2 + y^5 + c, x^11, z^19])
sage: f.degree()
19
```

```
sage: R.<c> = QQ[]
sage: A.<x> = AffineSpace(R, 1)
sage: f = DynamicalSystem_affine([x^4])
sage: f.degree()
4
```

```
sage: A.<x,y> = AffineSpace(QQ, 2)
sage: f = DynamicalSystem_affine([x, y/(1 + x^2)])
sage: f.degree()
2
```

dynatomic_polynomial(period)

Compute the (affine) dynatomic polynomial of a dynamical system $f : \mathbb{A}^1 \rightarrow \mathbb{A}^1$.

The dynatomic polynomial is the analog of the cyclotomic polynomial and its roots are the points of formal period n .

ALGORITHM:

Homogenize to a map $f : \mathbb{P}^1 \rightarrow \mathbb{P}^1$ and compute the dynatomic polynomial there. Then, dehomogenize.

INPUT:

- period – positive integer or a list/tuple $[m, n]$, where m is the preperiod and n is the period

OUTPUT:

If possible, a single variable polynomial in the coordinate ring of the polynomial. Otherwise a fraction field element of the coordinate ring of the polynomial.

EXAMPLES:

```
sage: A.<x,y> = AffineSpace(QQ, 2)
sage: f = DynamicalSystem_affine([x^2+y^2, y^2])
sage: f.dynatomic_polynomial(2)
Traceback (most recent call last):
...
TypeError: does not make sense in dimension >1
```

```
sage: A.<x> = AffineSpace(ZZ, 1)
sage: f = DynamicalSystem_affine([(x^2+1)/x])
sage: f.dynatomic_polynomial(4) #_
˓needs sage.libs.pari
2*x^12 + 18*x^10 + 57*x^8 + 79*x^6 + 48*x^4 + 12*x^2 + 1
```

```
sage: A.<x> = AffineSpace(CC, 1)
sage: f = DynamicalSystem_affine([(x^2+1)/(3*x)])
sage: f.dynatomic_polynomial(3)
13.0000000000000*x^6 + 117.000000000000*x^4 + 78.000000000000*x^2 +
1.00000000000000
```

```
sage: A.<x> = AffineSpace(QQ, 1)
sage: f = DynamicalSystem_affine([x^2-10/9])
sage: f.dynatomic_polynomial([2, 1])
531441*x^4 - 649539*x^2 - 524880
```

```
sage: A.<x> = AffineSpace(CC, 1)
sage: f = DynamicalSystem_affine([x^2+CC.0])
sage: f.dynatomic_polynomial(2)
x^2 + x + 1.00000000000000 + 1.00000000000000*I
```

```
sage: K.<c> = FunctionField(QQ)
sage: A.<x> = AffineSpace(K, 1)
sage: f = DynamicalSystem_affine([x^2 + c])
sage: f.dynatomic_polynomial(4)
x^12 + 6*c*x^10 + x^9 + (15*c^2 + 3*c)*x^8 + 4*c*x^7 + (20*c^3 + 12*c^2 +_
˓1)*x^6
+ (6*c^2 + 2*c)*x^5 + (15*c^4 + 18*c^3 + 3*c^2 + 4*c)*x^4 + (4*c^3 + 4*c^2 +_
˓1)*x^3
+ (6*c^5 + 12*c^4 + 6*c^3 + 5*c^2 + c)*x^2 + (c^4 + 2*c^3 + c^2 + 2*c)*x
+ c^6 + 3*c^5 + 3*c^4 + 3*c^3 + 2*c^2 + 1
```

```
sage: A.<z> = AffineSpace(QQ, 1)
sage: f = DynamicalSystem_affine([z^2+3/z+1/7])
sage: f.dynatomic_polynomial(1).parent()
Multivariate Polynomial Ring in z over Rational Field
```

```
sage: R.<c> = QQ[]
sage: A.<z> = AffineSpace(R, 1)
sage: f = DynamicalSystem_affine([z^2 + c])
sage: f.dynatomic_polynomial([1, 1])
z^2 + z + c
```

```
sage: A.<x> = AffineSpace(CC, 1)
sage: F = DynamicalSystem_affine([1/2*x^2 + CC(sqrt(3))]) #_
˓needs sage.symbolic
sage: F.dynatomic_polynomial([1, 1]) #_
˓needs sage.symbolic
(0.125000000000000*x^4 + 0.366025403784439*x^2 + 1.50000000000000)/(0.#
˓500000000000000*x^2 - x + 1.73205080756888)
```

homogenize (n)

Return the homogenization of this dynamical system.

If its domain is a subscheme, the domain of the homogenized map is the projective embedding of the domain. The domain and codomain can be homogenized at different coordinates: $n[0]$ for the domain and $n[1]$ for the codomain.

INPUT:

- n – tuple of nonnegative integers; if n is an integer, then the two values of the tuple are assumed to be the same

OUTPUT: *DynamicalSystem_projective*

EXAMPLES:

```
sage: A.<x,y> = AffineSpace(ZZ, 2)
sage: f = DynamicalSystem_affine([(x^2-2)/x^5, y^2])
sage: f.homogenize(2)
Dynamical System of Projective Space of dimension 2 over Rational Field
Defn: Defined on coordinates by sending (x0 : x1 : x2) to
(x0^2*x2^5 - 2*x2^7 : x0^5*x1^2 : x0^5*x2^2)
```

```
sage: A.<x,y> = AffineSpace(CC, 2)
sage: f = DynamicalSystem_affine([(x^2-2)/(x*y), y^2-x])
sage: f.homogenize((2, 0))
Dynamical System of Projective Space of dimension 2 over Complex Field with
→53 bits of precision
Defn: Defined on coordinates by sending (x0 : x1 : x2) to
(x0*x1*x2^2 : x0^2*x2^2 + (-2.00000000000000)*x2^4 : x0*x1^3 - x0^
→2*x1*x2)
```

```
sage: A.<x,y> = AffineSpace(ZZ, 2)
sage: X = A.subscheme([x-y^2])
sage: f = DynamicalSystem_affine([9*y^2, 3*y], domain=X)
sage: f.homogenize(2)
Dynamical System of Closed subscheme of Projective Space
of dimension 2 over Integer Ring defined by:
x1^2 - x0*x2
Defn: Defined on coordinates by sending (x0 : x1 : x2) to
(9*x1^2 : 3*x1*x2 : x2^2)
```

```
sage: A.<x> = AffineSpace(QQ, 1)
sage: f = DynamicalSystem_affine([x^2-1])
sage: f.homogenize((1, 0))
Dynamical System of Projective Space of dimension 1 over Rational Field
Defn: Defined on coordinates by sending (x0 : x1) to
(x1^2 : x0^2 - x1^2)
```

```
sage: # needs sage.rings.number_field
sage: R.<a> = PolynomialRing(QQbar)
sage: A.<x,y> = AffineSpace(R, 2)
sage: f = DynamicalSystem_affine([QQbar(sqrt(2))*x*y, a*x^2]) #_
→needs sage.symbolic
sage: f.homogenize(2) #_
→needs sage.symbolic
Dynamical System of Projective Space of dimension 2 over Univariate
Polynomial Ring in a over Algebraic Field
Defn: Defined on coordinates by sending (x0 : x1 : x2) to
(1.414213562373095?*x0*x1 : a*x0^2 : x2^2)
```

```
sage: P.<x,y,z> = AffineSpace(QQ, 3)
sage: f = DynamicalSystem_affine([x^2 - 2*x*y + z*x, z^2 - y^2, 5*z*y])
sage: f.homogenize(2).dehomogenize(2) == f
True
```

`multiplier(P, n, check=True)`

Return the multiplier of the point P of period n by this dynamical system.

INPUT:

- P – a point on domain of the map
- n – positive integer, the period of P
- `check` – boolean (default: `True`); verify that P has period n

OUTPUT: a square matrix of size `self.codomain().dimension_relative()` in the `base_ring` of the map

EXAMPLES:

```
sage: P.<x,y> = AffineSpace(QQ, 2)
sage: f = DynamicalSystem_affine([x^2, y^2])
sage: f.multiplier(P([1, 1]), 1)
[2 0]
[0 2]
```

```
sage: P.<x,y,z> = AffineSpace(QQ, 3)
sage: f = DynamicalSystem_affine([x, y^2, z^2 - y])
sage: f.multiplier(P([1/2, 1, 0]), 2)
[1 0 0]
[0 4 0]
[0 0 0]
```

```
sage: P.<x> = AffineSpace(CC, 1)
sage: f = DynamicalSystem_affine([x^2 + 1/2])
sage: f.multiplier(P([0.5 + 0.5*I]), 1) #_
  ↪needs sage.symbolic
[1.00000000000000 + 1.00000000000000*I]
```

```
sage: R.<t> = PolynomialRing(CC, 1)
sage: P.<x> = AffineSpace(R, 1)
sage: f = DynamicalSystem_affine([x^2 - t^2 + t])
sage: f.multiplier(P([-t + 1]), 1)
[(-2.00000000000000)*t + 2.00000000000000]
```

```
sage: P.<x,y> = AffineSpace(QQ, 2)
sage: X = P.subscheme([x^2 - y^2])
sage: f = DynamicalSystem_affine([x^2, y^2], domain=X)
sage: f.multiplier(X([1, 1]), 1)
[2 0]
[0 2]
```

`nth_iterate(P, n)`

Return the n -th iterate of the point P by this dynamical system.

INPUT:

- P – a point in the map's domain

- n – positive integer

OUTPUT: a point in the map's codomain

EXAMPLES:

```
sage: A.<x,y> = AffineSpace(QQ, 2)
sage: f = DynamicalSystem_affine([(x-2*y^2)/x, 3*x*y])
sage: f.nth_iterate(A(9, 3), 3)
(-104975/13123, -9566667)
```

```
sage: A.<x,y> = AffineSpace(ZZ, 2)
sage: X = A.subscheme([x-y^2])
sage: f = DynamicalSystem_affine([9*y^2, 3*y], domain=X)
sage: f.nth_iterate(X(9, 3), 4)
(59049, 243)
```

```
sage: R.<t> = PolynomialRing(QQ)
sage: A.<x,y> = AffineSpace(FractionField(R), 2)
sage: f = DynamicalSystem_affine([(x-t*y^2)/x, t*x*y])
sage: f.nth_iterate(A(1, t), 3)
(-t^16 + 3*t^13 - 3*t^10 + t^7 + t^5 + t^3 - 1)/(t^5 + t^3 - 1), -t^9 - t^7 - t^4)
```

```
sage: A.<x,y,z> = AffineSpace(QQ, 3)
sage: X = A.subscheme([x^2-y^2])
sage: f = DynamicalSystem_affine([x^2, y^2, x+y], domain=X)
sage: f.nth_iterate_map(2)
Dynamical System of Closed subscheme of Affine Space of dimension 3 over Rational Field defined by:
x^2 - y^2
Defn: Defined on coordinates by sending (x, y, z) to
(x^4, y^4, x^2 + y^2)
```

nth_iterate_map(n)

Return the n -th iterate of self.

ALGORITHM:

Uses a form of successive squaring to reducing computations.

Todo

This could be improved.

INPUT:

- n – positive integer

OUTPUT: a dynamical system of affine space

EXAMPLES:

```
sage: A.<x,y> = AffineSpace(ZZ, 2)
sage: f = DynamicalSystem_affine([(x^2-2)/(2*y), y^2-3*x])
sage: f.nth_iterate_map(2)
Dynamical System of Affine Space of dimension 2 over Rational Field
```

(continues on next page)

(continued from previous page)

Defn: Defined on coordinates by sending (x, y) to
 $((x^4 - 4x^2 - 8y^2 + 4)/(8y^4 - 24x^2y^2), (2y^5 - 12x^2y^3 + 18x^2y - 3x^2 + 6)/(2y))$

```
sage: A.<x> = AffineSpace(QQ, 1)
sage: f = DynamicalSystem_affine([(3*x^2-2)/(x)])
sage: f.nth_iterate_map(3)
Dynamical System of Affine Space of dimension 1 over Rational Field
Defn: Defined on coordinates by sending  $(x)$  to
 $((2187x^8 - 6174x^6 + 6300x^4 - 2744x^2 + 432)/(81x^7 - 168x^5 + 112x^3 - 24x))$ 
```

```
sage: A.<x,y> = AffineSpace(ZZ, 2)
sage: X = A.subscheme([x-y^2])
sage: f = DynamicalSystem_affine([9*x^2, 3*y], domain=X)
sage: f.nth_iterate_map(2)
Dynamical System of Closed subscheme of Affine Space of dimension 2
over Integer Ring defined by:
 $-y^2 + x$ 
Defn: Defined on coordinates by sending  $(x, y)$  to
 $(729x^4, 9y)$ 
```

```
sage: A.<x,y> = AffineSpace(ZZ, 2)
sage: f = DynamicalSystem_affine([3/5*x^2, y^2/(2*x^2)])
sage: f.nth_iterate_map(2)
Dynamical System of Affine Space of dimension 2 over Rational Field
Defn: Defined on coordinates by sending  $(x, y)$  to
 $(27/125x^4, y^4/(72/25x^8))$ 
```

orbit(P, n)

Return the orbit of P by the dynamical system.

Let F be this dynamical system. If n is an integer return $[P, F(P), \dots, F^n(P)]$. If n is a list or tuple $n = [m, k]$ return $[F^m(P), \dots, F^k(P)]$.

INPUT:

- P – a point in the map's domain
- n – nonnegative integer or list or tuple of two nonnegative integers

OUTPUT: list of points in the map's codomain

EXAMPLES:

```
sage: A.<x,y> = AffineSpace(QQ, 2)
sage: f = DynamicalSystem_affine([(x-2*y^2)/x, 3*x^2*y])
sage: f.orbit(A(9, 3), 3)
[(9, 3), (-1, 81), (13123, -243), (-104975/13123, -9566667)]
```

```
sage: A.<x> = AffineSpace(QQ, 1)
sage: f = DynamicalSystem_affine([(x-2)/x])
sage: f.orbit(A(1/2), [1, 3])
[(-3, 5/3), (-1/5)]
```

```
sage: A.<x,y> = AffineSpace(ZZ, 2)
sage: X = A.subscheme([x-y^2])
sage: f = DynamicalSystem_affine([9*y^2, 3*y], domain=X)
sage: f.orbit(X(9, 3), (0, 4))
[(9, 3), (81, 9), (729, 27), (6561, 81), (59049, 243)]
```

```
sage: R.<t> = PolynomialRing(QQ)
sage: A.<x,y> = AffineSpace(FractionField(R), 2)
sage: f = DynamicalSystem_affine([(x-t*y^2)/x, t*x*y])
sage: f.orbit(A(1, t), 3)
[(1, t),
 (-t^3 + 1, t^2),
 ((t^5 + t^3 - 1)/(t^3 - 1), -t^6 + t^3),
 ((-t^16 + 3*t^13 - 3*t^10 + t^7 + t^5 + t^3 - 1)/(t^5 + t^3 - 1), -t^9 - t^7 - t^4)]
```

class sage.dynamics.arithmetic_dynamics.affine_ds.**DynamicalSystem_affine_field**(*polys_or_rat_fnctn*, *do_main*)

Bases: *DynamicalSystem_affine*, *SchemeMorphism_polynomial_affine_space_field*

reduce_base_field()

Return this map defined over the field of definition of the coefficients.

The base field of the map could be strictly larger than the field where all of the coefficients are defined. This function reduces the base field to the minimal possible. This can be done when the base ring is a number field, $\mathbb{Q}\bar{}$, a finite field, or algebraic closure of a finite field.

OUTPUT: a dynamical system

EXAMPLES:

```
sage: # needs sage.rings.finite_rings
sage: K.<t> = GF(5^2)
sage: A.<x,y> = AffineSpace(K, 2)
sage: f = DynamicalSystem_affine([x^2 + 3*y^2, 3*y^2])
sage: f.reduce_base_field()
Dynamical System of Affine Space of dimension 2 over Finite Field of size 5
Defn: Defined on coordinates by sending (x, y) to
(x^2 - 2*y^2, -2*y^2)
```

```
sage: # needs sage.rings.number_field sage.symbolic
sage: A.<x,y> = AffineSpace(QQbar, 2)
sage: f = DynamicalSystem_affine([x^2 + QQbar(sqrt(3))*y^2,
....:                               QQbar(sqrt(-1))*y^2])
sage: f.reduce_base_field()
Dynamical System of Affine Space of dimension 2 over Number Field in a
with defining polynomial y^4 - y^2 + 1
with a = -0.866025403784439? + 0.500000000000000?*I
Defn: Defined on coordinates by sending (x, y) to
(x^2 + (a^3 - 2*a)*y^2, (a^3)*y^2)
```

```
sage: # needs sage.rings.number_field
sage: K.<v> = CyclotomicField(5)
sage: A.<x,y> = AffineSpace(K, 2)
sage: f = DynamicalSystem_affine([(3*x^2 + y) / (5*x), (y^2+1) / (x+y)])
```

(continues on next page)

(continued from previous page)

```
sage: f.reduce_base_field()
Dynamical System of Affine Space of dimension 2 over Rational Field
Defn: Defined on coordinates by sending (x, y) to
((3*x^2 + y)/(5*x), (5*y^2 + 5)/(5*x + 5*y))
```

weil_restriction()

Compute the Weil restriction of this morphism over some extension field.

If the field is a finite field, then this computes the Weil restriction to the prime subfield.

A Weil restriction of scalars - denoted $Res_{L/k}$ - is a functor which, for any finite extension of fields L/k and any algebraic variety X over L , produces another corresponding variety $Res_{L/k}(X)$, defined over k . It is useful for reducing questions about varieties over large fields to questions about more complicated varieties over smaller fields. Since it is a functor it also applied to morphisms. In particular, the functor applied to a morphism gives the equivalent morphism from the Weil restriction of the domain to the Weil restriction of the codomain.

OUTPUT:

Scheme morphism on the Weil restrictions of the domain and codomain of the map.

EXAMPLES:

```
sage: # needs sage.rings.number_field
sage: K.<v> = QuadraticField(5)
sage: A.<x,y> = AffineSpace(K, 2)
sage: f = DynamicalSystem_affine([x^2 - y^2, y^2])
sage: f.weil_restriction()
Dynamical System of Affine Space of dimension 4 over Rational Field
Defn: Defined on coordinates by sending (z0, z1, z2, z3) to
(z0^2 + 5*z1^2 - z2^2 - 5*z3^2, 2*z0*z1 - 2*z2*z3, z2^2 + 5*z3^2, -2*z2*z3)
```

```
sage: # needs sage.rings.number_field
sage: K.<v> = QuadraticField(5)
sage: PS.<x,y> = AffineSpace(K, 2)
sage: f = DynamicalSystem_affine([x, y])
sage: F = f.weil_restriction()
sage: P = PS(2, 1)
sage: Q = P.weil_restriction()
sage: f(P).weil_restriction() == F(Q)
True
```

```
class sage.dynamics.arithmetic_dynamics.affine_ds.DynamicalSystem_affine_finite_field(polys_
do-
main)
```

Bases: *DynamicalSystem_affine_field*, *SchemeMorphism_polyno-
mial_affine_space_finite_field*

cyclegraph()

Return the digraph of all orbits of this morphism mod p .

For subschemes, only points on the subscheme whose image are also on the subscheme are in the digraph.

OUTPUT: a digraph

EXAMPLES:

```
sage: P.<x,y> = AffineSpace(GF(5), 2)
sage: f = DynamicalSystem_affine([x^2 - y, x*y + 1])
sage: f.cyclegraph()
# needs sage.graphs
Looped digraph on 25 vertices
```

```
sage: # needs sage.rings.finite_rings
sage: P.<x> = AffineSpace(GF(3^3, 't'), 1)
sage: f = DynamicalSystem_affine([x^2 - 1])
sage: f.cyclegraph()
# needs sage.graphs
Looped digraph on 27 vertices
```

```
sage: P.<x,y> = AffineSpace(GF(7), 2)
sage: X = P.subscheme(x - y)
sage: f = DynamicalSystem_affine([x^2, y^2], domain=X)
sage: f.cyclegraph()
# needs sage.graphs
Looped digraph on 7 vertices
```

orbit_structure(P)

Every point is preperiodic over a finite field.

This function returns the pair $[m, n]$ where m is the preperiod and n is the period of the point P by this map.

INPUT:

- P – a point in the map's domain

OUTPUT: list $[m, n]$ of integers

EXAMPLES:

```
sage: A.<x,y> = AffineSpace(GF(13), 2)
sage: f = DynamicalSystem_affine([x^2 - 1, y^2])
sage: f.orbit_structure(A(2, 3))
[1, 6]
```

```
sage: # needs sage.rings.finite_rings
sage: A.<x,y,z> = AffineSpace(GF(49, 't'), 3)
sage: f = DynamicalSystem_affine([x^2 - z, x - y + z, y^2 - x^2])
sage: f.orbit_structure(A(1, 1, 2))
[7, 6]
```

5.3 Dynamical systems on projective schemes

A dynamical system of projective schemes determined by homogeneous polynomials functions that define what the morphism does on points in the ambient projective space.

The main constructor functions are given by `DynamicalSystem` and `DynamicalSystem_projective`. The constructors function can take either polynomials or a morphism from which to construct a dynamical system. If the domain is not specified, it is constructed. However, if you plan on working with points or subvarieties in the domain, it recommended to specify the domain.

The initialization checks are always performed by the constructor functions. It is possible, but not recommended, to skip these checks by calling the class initialization directly.

AUTHORS:

- David Kohel, William Stein
- William Stein (2006-02-11): fixed bug where $P(0,0,0)$ was allowed as a projective point.
- Volker Braun (2011-08-08): Renamed classes, more documentation, misc cleanups.
- Ben Hutz (2013-03) iteration functionality and new directory structure for affine/projective, height functionality
- Brian Stout, Ben Hutz (Nov 2013) - added minimal model functionality
- Dillon Rose (2014-01): Speed enhancements
- Ben Hutz (2015-11): iteration of subschemes
- Ben Hutz (2017-7): relocate code and create class

```
class sage.dynamics.arithmetic_dynamics.projective_ds.DynamicalSystem_projective(polys,
do-
main)
```

Bases: `SchemeMorphism_polynomial_projective_space`, `DynamicalSystem`

A dynamical system of projective schemes determined by homogeneous polynomials that define what the morphism does on points in the ambient projective space.

Warning

You should not create objects of this class directly because no type or consistency checking is performed. The preferred method to construct such dynamical systems is to use `DynamicalSystem_projective()` function

INPUT:

- `morphism_or_polys` – a `SchemeMorphism`, a polynomial, a rational function, or a list or tuple of homogeneous polynomials
- `domain` – (optional) projective space or projective subscheme
- `names` – tuple of strings (default: '`X`', '`Y`') to be used as coordinate names for a projective space that is constructed

The following combinations of `morphism_or_polys` and `domain` are meaningful:

- `morphism_or_polys` is a `SchemeMorphism`; `domain` is ignored in this case.
- `morphism_or_polys` is a list of homogeneous polynomials that define a rational endomorphism of `domain`.
- `morphism_or_polys` is a list of homogeneous polynomials and `domain` is unspecified; `domain` is then taken to be the projective space of appropriate dimension over the common base ring, if one exists, of the elements of `morphism_or_polys`.
- `morphism_or_polys` is a single polynomial or rational function; `domain` is ignored and taken to be a 1-dimensional projective space over the base ring of `morphism_or_polys` with coordinate names given by `names`.

OUTPUT: `DynamicalSystem_projective`

EXAMPLES:

```
sage: P1.<x,y> = ProjectiveSpace(QQ, 1)
sage: DynamicalSystem_projective([y, 2*x])
Dynamical System of Projective Space of dimension 1 over Rational Field
Defn: Defined on coordinates by sending (x : y) to
(y : 2*x)
```

We can define dynamical systems on P^1 by giving a polynomial or rational function:

```
sage: R.<t> = QQ[]
sage: DynamicalSystem_projective(t^2 - 3)
Dynamical System of Projective Space of dimension 1 over Rational Field
Defn: Defined on coordinates by sending (X : Y) to
(X^2 - 3*Y^2 : Y^2)
sage: DynamicalSystem_projective(1/t^2)
Dynamical System of Projective Space of dimension 1 over Rational Field
Defn: Defined on coordinates by sending (X : Y) to
(Y^2 : X^2)
```

```
sage: R.<x> = PolynomialRing(QQ, 1)
sage: DynamicalSystem_projective(x^2, names=['a', 'b'])
Dynamical System of Projective Space of dimension 1 over Rational Field
Defn: Defined on coordinates by sending (a : b) to
(a^2 : b^2)
```

Symbolic Ring elements are not allowed:

```
sage: x, y = var('x, y')
needs sage.symbolic
sage: DynamicalSystem_projective([x^2, y^2])
needs sage.symbolic
Traceback (most recent call last):
...
ValueError: [x^2, y^2] must be elements of a polynomial ring
```

```
sage: R.<x> = PolynomialRing(QQ, 1)
sage: DynamicalSystem_projective(x^2)
Dynamical System of Projective Space of dimension 1 over Rational Field
Defn: Defined on coordinates by sending (X : Y) to
(X^2 : Y^2)
```

```
sage: R.<t> = PolynomialRing(QQ)
sage: P.<x, y, z> = ProjectiveSpace(R, 2)
sage: X = P.subscheme([x])
sage: DynamicalSystem_projective([x^2, t*y^2, x*z], domain=X)
Dynamical System of Closed subscheme of Projective Space of dimension
2 over Univariate Polynomial Ring in t over Rational Field defined by:
x
Defn: Defined on coordinates by sending (x : y : z) to
(x^2 : t*y^2 : x*z)
```

When elements of the quotient ring are used, they are reduced:

```
sage: P.<x, y, z> = ProjectiveSpace(CC, 2)
sage: X = P.subscheme([x - y])
sage: u, v, w = X.coordinate_ring().gens()
needs sage.rings.function_field
```

(continues on next page)

(continued from previous page)

```
sage: DynamicalSystem_projective([u^2, v^2, w*u], domain=X) #_
˓needs sage.rings.function_field
Dynamical System of Closed subscheme of Projective Space of dimension
2 over Complex Field with 53 bits of precision defined by:
x - y
Defn: Defined on coordinates by sending (x : y : z) to
(y^2 : y^2 : y*z)
```

We can also compute the forward image of subschemes through elimination. In particular, let $X = V(h_1, \dots, h_t)$ and define the ideal $I = (h_1, \dots, h_t, y_0 - f_0(\bar{x}), \dots, y_n - f_n(\bar{x}))$. Then the elimination ideal $I_{n+1} = I \cap K[y_0, \dots, y_n]$ is a homogeneous ideal and $f(X) = V(I_{n+1})$:

```
sage: P.<x,y,z> = ProjectiveSpace(QQ, 2)
sage: f = DynamicalSystem_projective([(x-2*y)^2, (x-2*z)^2, x^2])
sage: X = P.subscheme(y - z)
sage: f(f(f(X))) #_
˓needs sage.rings.function_field
Closed subscheme of Projective Space of dimension 2 over Rational Field
defined by:
y - z
```

```
sage: P.<x,y,z,w> = ProjectiveSpace(QQ, 3)
sage: f = DynamicalSystem_projective([(x-2*y)^2, (x-2*z)^2, (x-2*w)^2, x^2])
sage: f(P.subscheme([x, y, z])) #_
˓needs sage.rings.function_field
Closed subscheme of Projective Space of dimension 3 over Rational Field
defined by:
w,
y,
x
```

```
sage: T.<x,y,z,w,u> = ProductProjectiveSpaces([2, 1], QQ)
sage: DynamicalSystem_projective([x^2*u, y^2*w, z^2*u, w^2, u^2], domain=T)
Dynamical System of Product of projective spaces P^2 x P^1 over Rational Field
Defn: Defined by sending (x : y : z , w : u) to
(x^2*u : y^2*w : z^2*u , w^2 : u^2).
```

```
sage: # needs sage.rings.number_field
sage: K.<v> = QuadraticField(-7)
sage: P.<x,y> = ProjectiveSpace(K, 1)
sage: f = DynamicalSystem([x^3 + v*x*y^2, y^3])
sage: fbar = f.change_ring(QQbar)
sage: fbar.is_postcritically_finite()
False
```

Lattes_to_curve (return_conjugation=False, check_lattes=False)

Finds a Short Weierstrass Model Elliptic curve of self self assumed to be Lattes map and not in characteristic 2 or 3

INPUT:

`return_conjugation` – (default: False) if True, then return the conjugation that moves self to a map that comes from a Short Weierstrass Model Elliptic curve check_lattes` – (default: False) if True, then will ValueError if not Lattes`

OUTPUT: a Short Weierstrass Model Elliptic curve which is isogenous to the Elliptic curve of ‘self’, If `return_conjugation` is True then also returns conjugation of ‘self’ to short form as a matrix

EXAMPLES:

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = P.Lattes_map(EllipticCurve([0, 0, 0, 10, 2]), 2)
sage: f.Lattes_to_curve()
Elliptic Curve defined by  $y^2 = x^3 + 10x + 2$  over Rational Field
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: M = matrix(QQ, 2, 2, [[1, 2], [-1, 2]])
sage: f = P.Lattes_map(EllipticCurve([1, 1, 1, 1, 2]), 2)
sage: f = f.conjugate(M)
sage: f.Lattes_to_curve(return_conjugation = True)
(
[ -7/36*a^2 + 7/12*a + 7/3 -17/18*a^2 + 17/6*a + 34/3]
[ -1/8*a^2 + 1/4*a + 3/2 1/4*a^2 - 1/2*a - 3],
Elliptic Curve defined by  $y^2 = x^3 + (-94/27*a^2+94/9*a+376/9)*x + 12232/243$  over Number Field in  $a$  with defining polynomial  $y^3 - 18y - 30$ 
)
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = P.Lattes_map(EllipticCurve([1, 1, 1, 2, 2]), 2)
sage: L.<i> = CyclotomicField(4)
sage: M = Matrix([[1+i, 2*i], [0, -i]])
sage: f = f.conjugate(M)
sage: f.Lattes_to_curve(return_conjugation = True)
(
[ 1 19/24*a + 19/24]
[ 0 1],
Elliptic Curve defined by  $y^2 = x^3 + 95/96*a*x + (-1169/3456*a+1169/3456)$  over Number Field in  $a$  with defining polynomial  $y^2 + 1$ 
)
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: M = matrix(QQ, 2, 2, [[1, 3], [2, 1]])
sage: E = EllipticCurve([1, 1, 1, 2, 3])
sage: f = P.Lattes_map(E, 2)
sage: f = f.conjugate(M)
sage: f.Lattes_to_curve(return_conjugation = True)
(
[11/1602*a^2 41/3204*a^2]
[ -2/5*a -1/5*a],
Elliptic Curve defined by  $y^2 = x^3 + 2375/3421872*a^2*x + (-254125/61593696)$  over Number Field in  $a$  with defining polynomial  $y^3 - 267$ 
)
```

```
sage: P.<x,y> = ProjectiveSpace(QQ , 1)
sage: M = matrix(QQ, 2, 2, [[1 , 3], [2 , 1]])
sage: E = EllipticCurve([1, 1, 1, 2, 3])
sage: f = P.Lattes_map(E , 2)
sage: f = f.conjugate(M)
sage: m,H = f.Lattes_to_curve(true)
sage: J.<x,y> = ProjectiveSpace(H.base_ring(), 1)
sage: K = J.Lattes_map(H,2)
sage: K = K.conjugate(m)
sage: K.scale_by(f[0].lc()/K[0].lc())
sage: K == f.change_ring(K.base_ring())
True
```

```
sage: P.<x,y> = ProjectiveSpace(RR, 1)
sage: F = DynamicalSystem_projective([x^4, y^4])
sage: F.Lattes_to_curve(check_lattes=True)
Traceback (most recent call last):
...
NotImplementedError: Base ring must be a number field
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: F = DynamicalSystem_projective([x^4, y^4])
sage: F.Lattes_to_curve(check_lattes=True)
Traceback (most recent call last):
...
ValueError: Map is not Lattes
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: F = DynamicalSystem_projective([x^4, y^4])
sage: F.Lattes_to_curve()
Traceback (most recent call last):
...
ValueError: No Solutions found. Check if map is Lattes
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: F = DynamicalSystem_projective([x^3, y^3])
sage: F.Lattes_to_curve(check_lattes=True)
Traceback (most recent call last):
...
NotImplementedError: Map is not Lattes or is Complex Lattes
```

```
sage: K.<x>=QuadraticField(2)
sage: P.<a,y>=ProjectiveSpace(K, 1)
sage: E=EllipticCurve([1, x])
sage: f=P.Lattes_map(E, 2)
sage: f.Lattes_to_curve()
Elliptic Curve defined by y^2 = x^3 + x + a
over Number Field in a with defining polynomial y^2 - 2
```

```
sage: P.<x,y>=ProjectiveSpace(QQbar, 1)
sage: E=EllipticCurve([1, 2])
sage: f=P.Lattes_map(E, 2)
sage: f.Lattes_to_curve(check_lattes=true)
Elliptic Curve defined by y^2 = x^3 + x + 2 over Rational Field
```

`affine_preperiodic_model`(*m, n, return_conjugation=False*)

Return a dynamical system conjugate to this one with affine (*n, m*) preperiodic points.

If the base ring of this dynamical system is finite, there may not be a model with affine preperiodic points, in which case a `ValueError` is raised.

INPUT:

- *m* – the preperiod of the preperiodic points to make affine
- *n* – the period of the preperiodic points to make affine
- `return_conjugation` – boolean (default: `False`); if `True`, return a tuple `(g, phi)` where *g* is a model with affine (*n, m*) preperiodic points and *phi* is the matrix that moves *f* to *g*.

OUTPUT: a dynamical system conjugate to this one

EXAMPLES:

```

sage: P.<x,y,z> = ProjectiveSpace(QQ, 2)
sage: f = DynamicalSystem_projective([x^2, y^2, z^2])
sage: g = f.affine_preperiodic_model(0, 1); g
→needs sage.rings.function_field
Dynamical System of Projective Space of dimension 2 over Rational Field
Defn: Defined on coordinates by sending (x : y : z) to
      (-x^2 : -2*x^2 + 2*x*y - y^2 : 2*x^2 - 2*x*y + 2*y^2 + 2*y*z + z^2)

```

We can check that g has affine fixed points:

```
sage: g.periodic_points(1)
→needs sage.rings.function_field
[(-1 : -1 : 1),
 (-1/2 : -1 : 1),
 (-1/2 : -1/2 : 1),
 (-1/3 : -2/3 : 1),
 (0 : -1 : 1),
 (0 : -1/2 : 1),
 (0 : 0 : 1)]
```

```

sage: # needs sage.rings.finite_rings
sage: P.<x,y,z> = ProjectiveSpace(GF(9), 2)
sage: f = DynamicalSystem_projective([x^2, y^2, z^2])
sage: f.affine_preperiodic_model(0, 1)
→needs sage.rings.function_field
Dynamical System of Projective Space of dimension 2
over Finite Field in z2 of size 3^2
Defn: Defined on coordinates by sending (x : y : z) to
      ((-z2)*x^2 : z2*x^2 + (-z2)*x*y + (-z2)*y^2 :
       (-z2)*x^2 + z2*x*y + (z2 + 1)*y^2 - y*z + z^2)

```

```

sage: R.<c> = GF(3) []
sage: P.<x,y,z> = ProjectiveSpace(R, 2)
sage: f = DynamicalSystem_projective([x^2, y^2, z^2])
sage: f.affine_preperiodic_model(0, 1) # long time
Dynamical System of Projective Space of dimension 2 over
Univariate Polynomial Ring in c over Finite Field of size 3
Defn: Defined on coordinates by sending (x : y : z) to
      (2*c^3*x^2 : c^3*x^2 + 2*c^3*x*y + 2*c^3*y^2 :
       2*c^3*x^2 + c^3*x*y + (c^3 + c^2)*y^2 + 2*c^2*y*z + c^2*z^2)

```

```

sage: # needs sage.rings.number_field
sage: K.<k> = CyclotomicField(3)
sage: P.<x,y,z> = ProjectiveSpace(K, 2)
sage: f = DynamicalSystem_projective([x^2 + k*x*y + y^2, z^2, y^2])
sage: f.affine_preperiodic_model(1, 1)
→needs sage.rings.function_field
Dynamical System of Projective Space of dimension 2
over Cyclotomic Field of order 3 and degree 2
Defn: Defined on coordinates by sending (x : y : z) to
      (-y^2 : x^2 : x^2 + (-k)*x*z + z^2)

```

(continued from previous page)

```

→needs sage.rings.function_field
sage: g == f.conjugate(mat)                                     #_
→needs sage.rings.function_field
True

```

```

sage: P.<x,y,z> = ProjectiveSpace(QQ, 2)
sage: X = P.subscheme(2*y - z)
sage: f = DynamicalSystem_projective([x^2 + y^2, z^2 + y^2, z^2], domain=X)
sage: f.affine_preperiodic_model(0, 1)                           #_
→needs sage.rings.function_field
Dynamical System of Closed subscheme of Projective Space of dimension 2
over Rational Field defined by: 2*y - z
Defn: Defined on coordinates by sending (x : y : z) to
(-x^2 - y^2 : y^2 : x^2 + z^2)

```

all_minimal_models (*return_transformation=False*, *prime_list=None*, *algorithm=None*, *check_minimal=True*)

Determine a representative in each $SL(2, \mathbf{Z})$ -orbit of this map.

This can be done either with the Bruin-Molnar algorithm or the Hutz-Stoll algorithm. The Hutz-Stoll algorithm requires the map to have minimal resultant and then finds representatives in orbits with minimal resultant. The Bruin-Molnar algorithm finds representatives with the same resultant (up to sign) of the given map.

Bruin-Molnar does not work for polynomials and is more efficient for large primes.

INPUT:

- *return_transformation* – boolean (default: *False*); this signals a return of the PGL_2 transformation to conjugate this map to the calculated models
- *prime_list* – (optional) a list of primes, in case one only wants to determine minimality at those specific primes
- *algorithm* – (optional) string; can be one of the following:
 - 'BM' – the Bruin-Molnar algorithm [BM2012]
 - 'HS' – for the Hutz-Stoll algorithm [HS2018]
if not specified, properties of the map are utilized to choose
- *check_minimal* – (optional) boolean; to first check if the map is minimal and if not, compute a minimal model before computing for orbit representatives

OUTPUT:

A list of pairs (F, m) , where F is dynamical system on the projective line and m is the associated $PGL(2, \mathbf{Q})$ element. Or just a list of dynamical systems if not returning the conjugation.

EXAMPLES:

```

sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem([2*x^2, 3*y^2])
sage: f.all_minimal_models()                               #_
→needs sage.rings.function_field
[Dynamical System of Projective Space of dimension 1 over Rational Field
Defn: Defined on coordinates by sending (x : y) to
(x^2 : y^2)]

```

```

sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: c = 2*3^6
sage: f = DynamicalSystem([x^3 - c^2*y^3, x*y^2])
sage: len(f.all_minimal_models(algorithm='HS'))
# needs sage.rings.function_field
14
sage: len(f.all_minimal_models(prime_list=[2], algorithm='HS'))
# needs sage.rings.function_field
2

```

```

sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem([237568*x^3 + 1204224*x^2*y + 2032560*x*y^2
....: + 1142289*y^3, -131072*x^3 - 663552*x^2*y - 1118464*x*y^2
....: - 627664*y^3])
sage: len(f.all_minimal_models(algorithm='BM'))
# needs sage.rings.function_field
2

```

REFERENCES:

- [BM2012]
- [HS2018]

`arakelov_zhang_pairing(g, **kwds)`

Return an estimate of the Arakelov-Zhang pairing of the rational maps `self` and `g` on \mathbb{P}^1 over a number field.

The Arakelov-Zhang pairing was introduced by Petsche, Szpiro, and Tucker in 2012, which measures the dynamical closeness of two rational maps. They prove inter alia that if one takes a sequence of small points for one map (for example, preperiodic points for `self`) and measure their dynamical height with respect to the other map (say, `g`), then the values of the height will tend to the value of the Arakelov-Zhang pairing.

The Arakelov-Zhang pairing involves mutual energy integrals between dynamical measures, which are in the case of polynomials, the equilibrium measures of the associated Julia sets at each place. As a result, these pairings are very difficult to compute exactly via analytic methods. We use a discrete approximation to these energy integrals.

ALGORITHM:

We select periodic points of order n , or n -th preimages of a specified starting value given by `f_starting_point` and `g_starting_point`. At the archimedean places and the places of bad reduction of the two maps, we compute the discrete approximations to the energy integrals involved using these points.

INPUT:

- `g` – a rational map of \mathbb{P}^1 given as a projective morphism `g` and `self` should have the same field of definition

kwds:

- `n` – positive integer (default: 5); order of periodic points to use or preimages to take if starting points are specified
- `f_starting_point` – (default: `None`) value in the base number field or `None`. If `f_starting_point` is `None`, we solve for points of period n for `self`. Otherwise, we take n -th preimages of the point given by `f_starting_point` under `f` on the affine line.
- `g_starting_point` – (default: `None`) value in the base number field or `None`. If `g_starting_point` is `None`, we solve for points of period n for `g`. Otherwise, we take n -th preimages of the point given by `g_starting_point` under `g` on the affine line.

- `check_primes_of_bad_reduction` – boolean (default: `False`); passed to the `primes_of_bad_reduction` function for `self` and `g`
- `prec` – (default: `RealField` default); default precision for `RealField` values which are returned
- `noise_multiplier` – (default: 2) a real number. Discriminant terms involved in the computation at the archimedean places are often not needed, particularly if the capacity of the Julia sets is 1, and introduce a lot of error. By a well-known result of Mahler (see also M. Baker, “A lower bound for averages of dynamical Green’s functions”) such error (for a set of N points) is on the order of $\log(N)/N$ after our normalization. We check if the value of the archimedean discriminant terms is within $2 * \text{noise_multiplier}$ of $\log(N)/N$. If so, we discard it. In practice this greatly improves the accuracy of the estimate of the pairing. If desired, `noise_multiplier` can be set to 0, and no terms will be ignored.

OUTPUT: a real number estimating the Arakelov-Zhang pairing of the two rational maps

EXAMPLES:

```
sage: # needs sage.rings.number_field
sage: K.<k> = CyclotomicField(3)
sage: P.<x,y> = ProjectiveSpace(K, 1)
sage: f = DynamicalSystem_projective([x^2 + (2*k + 2)*y^2, y^2])
sage: g = DynamicalSystem_projective([x^2, y^2])
sage: pairingval = f.arakelov_zhang_pairing(g, n=5); pairingval
0.409598197761958
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem_projective([x^2 + 4*y^2, y^2])
sage: g = DynamicalSystem_projective([x^2, y^2])
sage: pairingval = f.arakelov_zhang_pairing(g, n=6); pairingval      #_
˓needs sage.rings.function_field
0.750178391443644
sage: # Compare to the exact value:
sage: dynheight = f.canonical_height(P(0, 1)); dynheight      #_
˓needs sage.libs.pari
0.75017839144364417318023000563
sage: dynheight - pairingval      #_
˓needs sage.libs.pari sage.rings.function_field
0.000000000000000
```

Notice that if we set the `noise_multiplier` to 0, the accuracy is diminished:

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem_projective([x^2 + 4*y^2, y^2])
sage: g = DynamicalSystem_projective([x^2, y^2])
sage: pairingval = f.arakelov_zhang_pairing(g, n=6, noise_multiplier=0); pairingval      #_
˓needs sage.rings.function_field
sage: pairingval      #_
˓needs sage.rings.number_field
0.650660018921632
sage: dynheight = f.canonical_height(P(0, 1)); dynheight      #_
˓needs sage.libs.pari
0.75017839144364417318023000563
sage: pairingval - dynheight      #_
˓needs sage.libs.pari sage.rings.function_field
-0.0995183725220122
```

We compute the example of Prop. 18(d) from Petsche, Szpiro and Tucker:

```

sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem_projective([y^2 - (y - x)^2, y^2])
sage: g = DynamicalSystem_projective([x^2, y^2])
sage: f.arakelov_zhang_pairing(g) #_
    ↪needs sage.rings.function_field
0.326954667248466
sage: # Correct value should be = 0.323067...
sage: f.arakelov_zhang_pairing(g, n=9)      # long time #_
    ↪needs sage.rings.function_field
0.323091061918965
sage: _ - 0.323067                         # long time #_
    ↪needs sage.rings.function_field
0.0000240619189654789

```

Also from Prop. 18 of Petsche, Szpiro and Tucker, includes places of bad reduction:

```

sage: # needs sage.rings.number_field
sage: R.<z> = PolynomialRing(ZZ)
sage: K.<b> = NumberField(z^3 - 11)
sage: P.<x,y> = ProjectiveSpace(K,1)
sage: a = 7/(b - 1)
sage: f = DynamicalSystem_projective([a*y^2 - (a*y - x)^2, y^2])
sage: g = DynamicalSystem_projective([x^2, y^2])

```

If all archimedean absolute values of a have modulus > 2 , then the pairing should be $h(a)$:

```

sage: f.arakelov_zhang_pairing(g, n=6)      # long time #_
    ↪needs sage.rings.number_field
1.93846423207664
sage: _ - a.global_height()                  # long time #_
    ↪needs sage.rings.number_field
-0.00744591697867292

```

automorphism_group(kwds)**

Calculate the subgroup of PGL_2 that is the automorphism group of this dynamical system.

The automorphism group is the set of $PGL(2)$ elements that fixes this map under conjugation.

INPUT:

The following keywords are used in most cases:

- `num_cpus` – (default: 2) the number of threads to use. Setting to a larger number can greatly speed up this function

The following keywords are used only when the dimension of the domain is 1 and the base ring is the rationals, but ignored in all other cases:

- `starting_prime` – (default: 5) the first prime to use for CRT
- `algorithm` – (optional) can be one of the following:
 - '`CRT`' – Chinese Remainder Theorem
 - '`fixed_points`' – fixed points algorithm
- `return_functions` – boolean (default: `False`); `True` returns elements as linear fractional transformations and `False` returns elements as PGL_2 matrices
- `iso_type` – boolean (default: `False`); `True` returns the isomorphism type of the automorphism group

OUTPUT: list of elements in the automorphism group

AUTHORS:

- Original algorithm written by Xander Faber, Michelle Manes, Bianca Viray
- Modified by Joao Alberto de Faria, Ben Hutz, Bianca Thompson

REFERENCES:

- [FMV2014]

EXAMPLES:

```
sage: R.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem_projective([x^2 - y^2, x*y])
sage: f.automorphism_group(return_functions=True) #_
˓needs sage.libs.pari
[x, -x]
```

```
sage: R.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem_projective([x^2 + 5*x*y + 5*y^2, 5*x^2 + 5*x*y + y^
˓2])
sage: f.automorphism_group() #_
˓needs sage.libs.pari
[
[1 0]  [0 2]
[0 1], [2 0]
]
```

```
sage: P.<x,y,z> = ProjectiveSpace(QQ, 2)
sage: f = DynamicalSystem([x^3, y^3, z^3])
sage: len(f.automorphism_group()) #_
˓needs sage.rings.function_field
24
```

```
sage: R.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem_projective([x^2 - 2*x*y - 2*y^2, -2*x^2 - 2*x*y + y^
˓2])
sage: f.automorphism_group(return_functions=True) #_
˓needs sage.libs.pari
[x, 1/x, -x - 1, -x/(x + 1), (-x - 1)/x, -1/(x + 1)]
```

```
sage: R.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem_projective([3*x^2*y - y^3, x^3 - 3*x*y^2])
sage: lst, label = f.automorphism_group(algorithm='CRT') #_
˓needs sage.libs.pari
....: return_functions=True,
....: iso_type=True)
sage: sorted(lst), label #_
˓needs sage.libs.pari
([-1/x, 1/x, (-x - 1)/(x - 1), (-x + 1)/(x + 1), (x - 1)/(x + 1),
(x + 1)/(x - 1), -x, x],
'Dihedral of order 8')
```

```
sage: A.<z> = AffineSpace(QQ, 1)
sage: f = DynamicalSystem_affine([1/z^3])
sage: F = f.homogenize(1)
```

(continues on next page)

(continued from previous page)

```
sage: F.automorphism_group() #_
→needs sage.libs.pari
[
[1 0] [0 2] [-1 0] [0 -2]
[0 1], [2 0], [0 1], [2 0]
]
```

```
sage: P.<x,y,z> = ProjectiveSpace(QQ, 2)
sage: f = DynamicalSystem_projective([x**2 + x*z, y**2, z**2])
sage: f.automorphism_group() #_
→needs sage.rings.function_field
[
[1 0 0]
[0 1 0]
[0 0 1]
]
```

```
sage: # needs sage.rings.number_field
sage: K.<w> = CyclotomicField(3)
sage: P.<x,y> = ProjectiveSpace(K, 1)
sage: D6 = DynamicalSystem_projective([y^2, x^2])
sage: sorted(D6.automorphism_group())
[
[-w - 1 0 0 -w - 1 [w 0] [0 w] [0 1] [1 0]
 [ 0 1], [ 1 0], [0 1], [1 0], [1 0], [0 1]
]
```

canonical_height(P , *kwds*)**

Evaluate the (absolute) canonical height of P with respect to this dynamical system.

Must be over number field or order of a number field. Specify either the number of terms of the series to evaluate or the error bound required.

ALGORITHM:

The sum of the Green's function at the archimedean places and the places of bad reduction.

If function is defined over \mathbb{Q} uses Wells' Algorithm, which allows us to not have to factor the resultant.

INPUT:

- P – a projective point

kwds:

- `badprimes` – (optional) a list of primes of bad reduction
- `N` – (default: 10) positive integer; number of terms of the series to use in the local green functions
- `prec` – (default: 100) positive integer, float point or p -adic precision
- `error_bound` – (optional) a positive real number

OUTPUT: a real number

EXAMPLES:

```
sage: P.<x,y> = ProjectiveSpace(ZZ,1)
sage: f = DynamicalSystem_projective([x^2 + y^2, 2*x*y]);
sage: f.canonical_height(P.point([5,4]), error_bound=0.001) #_
```

(continues on next page)

(continued from previous page)

```

→needs sage.libs.pari
2.1970553519503404898926835324
sage: f.canonical_height(P.point([2,1]), error_bound=0.001)      #
→needs sage.libs.pari
1.0984430632822307984974382955

```

Notice that preperiodic points may not return exactly 0:

```

sage: # needs sage.rings.number_field
sage: R.<X> = PolynomialRing(QQ)
sage: K.<a> = NumberField(X^2 + X - 1)
sage: P.<x,y> = ProjectiveSpace(K,1)
sage: f = DynamicalSystem_projective([x^2 - 2*y^2, y^2])
sage: Q = P.point([a,1])
sage: f.canonical_height(Q, error_bound=0.000001)   # Answer only within error_
→bound of 0
5.7364919788790160119266380480e-8
sage: f.nth_iterate(Q, 2) == Q  # but it is indeed preperiodic
True

```

```

sage: P.<x,y,z> = ProjectiveSpace(QQ,2)
sage: X = P.subscheme(x^2 - y^2);
sage: f = DynamicalSystem_projective([x^2, y^2, 4*z^2], domain=X);
sage: Q = X([4,4,1])
sage: f.canonical_height(Q, badprimes=[2])      #
→needs sage.rings.function_field
0.0013538030870311431824555314882

```

```

sage: P.<x,y,z> = ProjectiveSpace(QQ,2)
sage: X = P.subscheme(x^2 - y^2);
sage: f = DynamicalSystem_projective([x^2, y^2, 30*z^2], domain=X)
sage: Q = X([4, 4, 1])
sage: f.canonical_height(Q, badprimes=[2,3,5], prec=200)      #
→needs sage.rings.function_field
2.7054056208276961889784303469356774912979228770208655455481

```

```

sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem_projective([1000*x^2 - 29*y^2, 1000*y^2])
sage: Q = P(-1/4, 1)
sage: f.canonical_height(Q, error_bound=0.01)      #
→needs sage.libs.pari
3.7996079979254623065837411853

```

```

sage: RSA768 =_
...: →123018668453011775513049495838496272077285356959533479219732245215\
...: →
...: →1726400507263657518745202199786469389956474942774063845925192557326303453731548\
...: →
...: →2685079170261221429134616704292143116022212404792747377940806653514195974598569\
...: →
...: →02143413
sage: P.<x,y> = ProjectiveSpace(QQ,1)
sage: f = DynamicalSystem_projective([RSA768*x^2 + y^2, x*y])
sage: Q = P(RSA768,1)

```

(continues on next page)

(continued from previous page)

```
sage: f.canonical_height(Q, error_bound=0.0000000000000001) #?
˓→needs sage.libs.pari
931.18256422718241278672729195
```

conjugate(M , adjugate=False, normalize=False)

Conjugate this dynamical system by M , i.e. $M^{-1} \circ f \circ M$.

If possible the new map will be defined over the same space. Otherwise, will try to coerce to the base ring of M .

INPUT:

- M – a square invertible matrix
 - adjugate – boolean (default: False); also classically called adjoint, takes a square matrix M and finds the transpose of its cofactor matrix. Used for conjugation in place of inverse when specified True. Functionality is the same in projective space.
 - normalize – boolean (default: False); if normalize is True, then the method normalize coordinates is called

OUTPUT: a dynamical system

EXAMPLES:

```

sage: P.<x,y> = ProjectiveSpace(ZZ,1)
sage: f = DynamicalSystem_projective([x^2 + y^2, y^2])
sage: f.conjugate(matrix([[1,2], [0,1]]))
Dynamical System of Projective Space of dimension 1 over Integer Ring
Defn: Defined on coordinates by sending (x : y) to
      (x^2 + 4*x*y + 3*y^2 : y^2)

```

```

sage: R.<x> = PolynomialRing(QQ)
sage: K.<i> = NumberField(x^2 + 1)
    ↳ needs sage.rings.number_field
#_
sage: P.<x,y> = ProjectiveSpace(ZZ,1)
sage: f = DynamicalSystem_projective([x^3 + y^3, y^3])
sage: f.conjugate(matrix([[i,0], [0,-i]]))
    ↳ needs sage.rings.number_field
#_
Dynamical System of Projective Space of dimension 1 over Integer Ring
Defn: Defined on coordinates by sending (x : y) to
      (-x^3 + y^3 : -y^3)

```

```

sage: P.<x,y,z> = ProjectiveSpace(ZZ,2)
sage: f = DynamicalSystem_projective([x^2 + y^2, y^2, y*z])
sage: f.conjugate(matrix([[1,2,3], [0,1,2], [0,0,1]]))
Dynamical System of Projective Space of dimension 2 over Integer Ring
Defn: Defined on coordinates by sending (x : y : z) to
      (x^2 + 4*x*y + 3*y^2 + 6*x*z + 9*y*z + 7*z^2 : y^2 + 2*y*z : y*z + z^2)

```

```
sage: P.<x,y> = ProjectiveSpace(ZZ,1)
sage: f = DynamicalSystem_projective([x^2+y^2, y^2])
sage: f.conjugate(matrix([[2,0], [0,1/2]]))
Dynamical System of Projective Space of dimension 1 over Rational Field
Defn: Defined on coordinates by sending (x : y) to
(2*x^2 + 1/8*y^2 : 1/2*y^2)
```

```
sage: R.<x> = PolynomialRing(QQ)
sage: K.<i> = NumberField(x^2 + 1) #_
→needs sage.rings.number_field
sage: P.<x,y> = ProjectiveSpace(QQ,1)
sage: f = DynamicalSystem_projective([1/3*x^2 + 1/2*y^2, y^2]) #_
sage: f.conjugate(matrix([[i,0], [0,-i]])) #_
→needs sage.rings.number_field
Dynamical System of Projective Space of dimension 1
over Number Field in i with defining polynomial x^2 + 1
Defn: Defined on coordinates by sending (x : y) to
((1/3*i)*x^2 + (1/2*i)*y^2 : (-i)*y^2)
```

Todo

Use the left and right action functionality to replace the code below with `#return DynamicalSystem_projective(M.inverse()*self*M, domain=self.codomain())` once there is a function to pass to the smallest field of definition.

`critical_height (**kwd)`

Compute the critical height of this dynamical system.

The critical height is defined by J. Silverman as the sum of the canonical heights of the critical points. This must be dimension 1 and defined over a number field or number field order.

The computations can be done either over the algebraic closure of the base field or over the minimal extension of the base field that contains the critical points.

INPUT: keyword arguments:

- `badprimes` – (optional) a list of primes of bad reduction
- `N` – (default: 10) positive integer; number of terms of the series to use in the local green functions
- `prec` – (default: 100) positive integer, float point or p -adic precision
- `error_bound` – (optional) a positive real number
- `use_algebraic_closure` – boolean (default: `True`); if `True`, uses the algebraic closure. If `False`, uses the smallest extension of the base field containing all the critical points.

OUTPUT: real number

EXAMPLES:

```
sage: P.<x,y> = ProjectiveSpace(QQ,1)
sage: f = DynamicalSystem_projective([x^3 + 7*y^3, 11*y^3]) #_
sage: f.critical_height() #_
→needs sage.rings.number_field
1.1989273321156851418802151128
```

```

sage: # needs sage.rings.number_field
sage: K.<w> = QuadraticField(2)
sage: P.<x,y> = ProjectiveSpace(K,1)
sage: f = DynamicalSystem_projective([x^2 + w*y^2, y^2])
sage: f.critical_height()
0.16090842452312941163719755472

```

Postcritically finite maps have critical height 0:

```
sage: P.<x,y> = ProjectiveSpace(QQ,1)
sage: f = DynamicalSystem_projective([x^3 + 3*x*y^2, y^3])
sage: f.critical_height(use_algebraic_closure=False)      #
→needs sage.rings.number_field
0.000023477016733897112886491967991
sage: f.critical_height()                                #
→needs sage.rings.number_field
0.000023477016733897112886491967991
```

critical_point_portrait(*check=True*, *use_algebraic_closure=True*)

If this dynamical system is post-critically finite, return its critical point portrait.

This is the directed graph of iterates starting with the critical points. Must be dimension 1. If check is True, then the map is first checked to see if it is postcritically finite.

The computations can be done either over the algebraic closure of the base field or over the minimal extension of the base field that contains the critical points.

INPUT:

- `check` – boolean (default: `True`)
 - `use_algebraic_closure` – boolean (default: `True`); if `True`, uses the algebraic closure. If `False`, uses the smallest extension of the base field containing all the critical points.

OUTPUT: a digraph

EXAMPLES:

```
sage: # needs sage.rings.number_field
sage: R.<z> = QQ[]
sage: K.<v> = NumberField(z^6 + 2*z^5 - 1)
sage: PS.<x,y> = ProjectiveSpace(K,1)
sage: f = DynamicalSystem_projective(
sage: f.critical_point_portrait(check=True)
→needs sage.graphs
Looped digraph on 6 vertices
```

```
sage: P.<x,y> = ProjectiveSpace(QQ,1)
sage: f = DynamicalSystem_projective([x^5 + 5/4*x*y^4, y^5])
sage: f.critical_point_portrait(check=False)
→needs sage.graphs sage.rings.number_field
Looped digraph on 5 vertices
```

```
sage: P.<x,y> = ProjectiveSpace(QQ,1)
sage: f = DynamicalSystem_projective([x^2 + 2*y^2, y^2])
sage: f.critical_point_portrait()
# needs sage.rings.number_field
Traceback (most recent call last):
...
TypeError: map must be post-critically finite
```

```
sage: # needs sage.rings.number_field
sage: R.<t> = QQ[]
sage: K.<v> = NumberField(t^3 + 2*t^2 + t + 1)
sage: phi = K.embeddings(QQbar)[0]
sage: P.<x, y> = ProjectiveSpace(K, 1)
sage: f = DynamicalSystem_projective([x^2 + v*y^2, y^2])
sage: f.change_ring(phi).critical_point_portrait()
# needs sage.graphs
Looped digraph on 4 vertices
```

```
sage: P.<x,y> = ProjectiveSpace(QQ,1)
sage: f = DynamicalSystem_projective([8*x^4 - 8*x^2*y^2 + y^4, y^4])
sage: f.critical_point_portrait(use_algebraic_closure=False) # long time
Looped digraph on 6 vertices
```

```
sage: # needs sage.rings.number_field
sage: P.<x,y> = ProjectiveSpace(QQbar,1)
sage: f = DynamicalSystem_projective([8*x^4 - 8*x^2*y^2 + y^4, y^4])
sage: f.critical_point_portrait() # long time
# needs sage.graphs
Looped digraph on 6 vertices
```

```
sage: P.<x,y> = ProjectiveSpace(GF(3),1)
sage: f = DynamicalSystem_projective([x^2 + x*y - y^2, x*y])
sage: f.critical_point_portrait(use_algebraic_closure=False)
# needs sage.libs.pari
Looped digraph on 6 vertices
sage: f.critical_point_portrait() #long time
Looped digraph on 6 vertices
```

critical_points (R=None)

Return the critical points of this dynamical system defined over the ring R or the base ring of this map.

Must be dimension 1.

INPUT:

- \mathbb{R} – (optional) a ring

OUTPUT: list of projective space points defined over R

EXAMPLES:

```
sage: set_verbose(None)
sage: P.<x,y> = ProjectiveSpace(QQ,1)
sage: f = DynamicalSystem_projective([x^3 - 2*x*y^2 + 2*y^3, y^3])
sage: f.critical_points()
# needs sage.rings.function_field
[(1 : 0)]
```

(continues on next page)

(continued from previous page)

```
sage: K.<w> = QuadraticField(6) #_
→needs sage.rings.number_field
sage: f.critical_points(K) #_
→needs sage.rings.number_field
[(-1/3*w : 1), (1/3*w : 1), (1 : 0)]
```

```
sage: set_verbose(None)
sage: P.<x,y> = ProjectiveSpace(QQ,1)
sage: f = DynamicalSystem_projective([2*x^2 - y^2, x*y])
sage: f.critical_points(QQbar) #_
→needs sage.rings.number_field
[(-0.7071067811865475?*I : 1), (0.7071067811865475?*I : 1)]
```

critical_subscheme()

Return the critical subscheme of this dynamical system.

OUTPUT: projective subscheme

EXAMPLES:

```
sage: set_verbose(None)
sage: P.<x,y> = ProjectiveSpace(QQ,1)
sage: f = DynamicalSystem_projective([x^3 - 2*x*y^2 + 2*y^3, y^3])
sage: f.critical_subscheme() #_
→needs sage.rings.function_field
Closed subscheme of Projective Space of dimension 1 over Rational Field
defined by:
9*x^2*y^2 - 6*y^4
```

```
sage: set_verbose(None)
sage: P.<x,y> = ProjectiveSpace(QQ,1)
sage: f = DynamicalSystem_projective([2*x^2 - y^2, x*y])
sage: f.critical_subscheme() #_
→needs sage.rings.function_field
Closed subscheme of Projective Space of dimension 1 over Rational Field
defined by:
4*x^2 + 2*y^2
```

```
sage: P.<x,y,z> = ProjectiveSpace(QQ,2)
sage: f = DynamicalSystem_projective([2*x^2 - y^2, x*y, z^2])
sage: f.critical_subscheme() #_
→needs sage.rings.function_field
Closed subscheme of Projective Space of dimension 2 over Rational Field
defined by:
8*x^2*z + 4*y^2*z
```

```
sage: # needs sage.rings.finite_rings
sage: P.<x,y,z,w> = ProjectiveSpace(GF(81), 3)
sage: g = DynamicalSystem_projective([x^3 + y^3, y^3 + z^3, z^3 + x^3, w^3])
sage: g.critical_subscheme()
Closed subscheme of Projective Space of dimension 3 over Finite Field in
z4 of size 3^4 defined by:
0
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem_projective([x^2, x*y])
sage: f.critical_subscheme()
# ...
needs sage.rings.function_field
Traceback (most recent call last):
...
TypeError: the function is not a morphism
```

degree_sequence (iterates=2)

Return sequence of degrees of normalized iterates starting with the degree of this dynamical system.

INPUT:

- `iterates` – (default: 2) positive integer

OUTPUT: list of integers

EXAMPLES:

```
sage: P2.<X,Y,Z> = ProjectiveSpace(QQ, 2)
sage: f = DynamicalSystem_projective([Z^2, X*Y, Y^2])
sage: f.degree_sequence(15)
# ...
needs sage.rings.function_field
[2, 3, 5, 8, 11, 17, 24, 31, 45, 56, 68, 91, 93, 184, 275]
```

```
sage: F.<t> = PolynomialRing(QQ)
sage: P2.<X,Y,Z> = ProjectiveSpace(F, 2)
sage: f = DynamicalSystem_projective([Y*Z, X*Y, Y^2 + t*X*Z])
sage: f.degree_sequence(5)
# ...
needs sage.rings.function_field
[2, 3, 5, 8, 13]
```

```
sage: P2.<X,Y,Z> = ProjectiveSpace(QQ, 2)
sage: f = DynamicalSystem_projective([X^2, Y^2, Z^2])
sage: f.degree_sequence(10)
# ...
needs sage.rings.function_field
[2, 4, 8, 16, 32, 64, 128, 256, 512, 1024]
```

```
sage: P2.<X,Y,Z> = ProjectiveSpace(ZZ, 2)
sage: f = DynamicalSystem_projective([X*Y, Y*Z+Z^2, Z^2])
sage: f.degree_sequence(10)
# ...
needs sage.rings.function_field
[2, 3, 4, 5, 6, 7, 8, 9, 10, 11]
```

dehomogenize (n)

Return the standard dehomogenization at the `n[0]` coordinate for the domain and the `n[1]` coordinate for the codomain.

Note that the new function is defined over the fraction field of the base ring of this map.

INPUT:

- `n` – tuple of nonnegative integers; if `n` is an integer, then the two values of the tuple are assumed to be the same

OUTPUT:

If the dehomogenizing indices are the same for the domain and codomain, then a `DynamicalSystem_affine` given by dehomogenizing the source and target of `self` with respect to the given indices

is returned. If the dehomogenizing indices for the domain and codomain are different then the resulting affine patches are different and a scheme morphism is returned.

EXAMPLES:

```
sage: P.<x,y> = ProjectiveSpace(ZZ,1)
sage: f = DynamicalSystem_projective([x^2 + y^2, y^2])
sage: f.dehomogenize(0)
Dynamical System of Affine Space of dimension 1 over Integer Ring
Defn: Defined on coordinates by sending (y) to
      (y^2/(y^2 + 1))
sage: f.dehomogenize((0, 1))
Scheme morphism:
From: Affine Space of dimension 1 over Integer Ring
To:   Affine Space of dimension 1 over Integer Ring
Defn: Defined on coordinates by sending (y) to
      ((y^2 + 1)/y^2)
```

dynamical_degree (*N=3, prec=53*)

Return an approximation to the dynamical degree of this dynamical system. The dynamical degree is defined as $\lim_{n \rightarrow \infty} \sqrt[n]{\deg(f^n)}$.

INPUT:

- *N* – (default: 3) positive integer, iterate to use for approximation
- *prec* – (default: 53) positive integer, real precision to use when computing root

OUTPUT: real number

EXAMPLES:

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem_projective([x^2 + x*y, y^2])
sage: f.dynamical_degree()
#_
˓needs sage.rings.function_field
2.00000000000000
```

```
sage: P2.<X,Y,Z> = ProjectiveSpace(ZZ, 2)
sage: f = DynamicalSystem_projective([X^2 + Y^2, Z^2])
sage: f.dynamical_degree(N=5, prec=100)
#_
˓needs sage.rings.function_field
1.4309690811052555010452244131
```

dynatomic_polynomial (*period*)

For a dynamical system of \mathbb{P}^1 compute the dynatomic polynomial.

The dynatomic polynomial is the analog of the cyclotomic polynomial and its roots are the points of formal period *period*. If possible the division is done in the coordinate ring of this map and a polynomial is returned. In rings where that is not possible, a `FractionField` element will be returned. In certain cases, when the conversion back to a polynomial fails, a `SymbolRing` element will be returned.

ALGORITHM:

For a positive integer *n*, let $[F_n, G_n]$ be the coordinates of the *n*-th iterate of *f*. Then construct

$$\Phi_n^*(f)(x, y) = \sum_{d|n} (yF_d(x, y) - xG_d(x, y))^{\mu(n/d)},$$

where μ is the Möbius function.

For a pair $[m, n]$, let $f^m = [F_m, G_m]$. Compute

$$\Phi_{m,n}^*(f)(x, y) = \Phi_n^*(f)(F_m, G_m)/\Phi_n^*(f)(F_{m-1}, G_{m-1})$$

REFERENCES:

- [Hutz2015]
- [MoPa1994]

INPUT:

- period – positive integer or a list/tuple $[m, n]$ where m is the preperiod and n is the period

OUTPUT:

If possible, a two variable polynomial in the coordinate ring of this map. Otherwise a fraction field element of the coordinate ring of this map. Or, a `SymbolicRing` element.

Todo

- Do the division when the base ring is p -adic so that the output is a polynomial.
- Convert back to a polynomial when the base ring is a function field (not over \mathbf{Q} or F_p).

EXAMPLES:

```
sage: P.<x,y> = ProjectiveSpace(QQ,1)
sage: f = DynamicalSystem_projective([x^2 + y^2, y^2])
sage: f.dynatomic_polynomial(2) #_
˓needs sage.libs.pari
x^2 + x*y + 2*y^2
```

```
sage: P.<x,y> = ProjectiveSpace(ZZ,1)
sage: f = DynamicalSystem_projective([x^2 + y^2, x*y])
sage: f.dynatomic_polynomial(4) #_
˓needs sage.libs.pari
2*x^12 + 18*x^10*y^2 + 57*x^8*y^4 + 79*x^6*y^6 + 48*x^4*y^8 + 12*x^2*y^10 + y^
˓12
```

```
sage: P.<x,y> = ProjectiveSpace(CC,1)
sage: f = DynamicalSystem_projective([x^2 + y^2, 3*x*y])
sage: f.dynatomic_polynomial(3) #_
˓needs sage.libs.pari
13.0000000000000*x^6 + 117.000000000000*x^4*y^2 +
78.000000000000*x^2*y^4 + y^6
```

```
sage: P.<x,y> = ProjectiveSpace(QQ,1)
sage: f = DynamicalSystem_projective([x^2 - 10/9*y^2, y^2])
sage: f.dynatomic_polynomial([2,1])
x^4*y^2 - 11/9*x^2*y^4 - 80/81*y^6
```

```
sage: P.<x,y> = ProjectiveSpace(QQ,1)
sage: f = DynamicalSystem_projective([x^2 - 29/16*y^2, y^2])
sage: f.dynatomic_polynomial([2,3]) #_
˓needs sage.libs.pari
x^12 - 95/8*x^10*y^2 + 13799/256*x^8*y^4 - 119953/1024*x^6*y^6 +
```

(continues on next page)

(continued from previous page)

```
8198847/65536*x^4*y^8 - 31492431/524288*x^2*y^10 +
172692729/16777216*y^12
```

```
sage: P.<x,y> = ProjectiveSpace(ZZ,1)
sage: f = DynamicalSystem_projective([x^2 - y^2, y^2])
sage: f.dynatomic_polynomial([1,2]) #_
˓needs sage.libs.pari
x^2 - x*y
```

```
sage: P.<x,y> = ProjectiveSpace(QQ,1)
sage: f = DynamicalSystem_projective([x^3 - y^3, 3*x*y^2])
sage: f.dynatomic_polynomial([0,4]) == f.dynatomic_polynomial(4) #_
˓needs sage.libs.pari
True
```

```
sage: P.<x,y,z> = ProjectiveSpace(QQ,2)
sage: f = DynamicalSystem_projective([x^2 + y^2, x*y, z^2])
sage: f.dynatomic_polynomial(2)
Traceback (most recent call last):
...
TypeError: does not make sense in dimension >1
```

```
sage: P.<x,y> = ProjectiveSpace(Qp(5),1) #_
˓needs sage.rings.padics
sage: f = DynamicalSystem_projective([x^2 + y^2, y^2]) #_
˓needs sage.rings.padics
sage: f.dynatomic_polynomial(2) #_
˓needs sage.rings.padics
(x^4*y + (2 + O(5^20))*x^2*y^3 - x*y^4 + (2 + O(5^20))*y^5)/(x^2*y - x*y^2 + #_
˓y^3)
```

```
sage: L.<t> = PolynomialRing(QQ)
sage: P.<x,y> = ProjectiveSpace(L,1)
sage: f = DynamicalSystem_projective([x^2 + t*y^2, y^2])
sage: f.dynatomic_polynomial(2) #_
˓needs sage.libs.pari
x^2 + x*y + (t + 1)*y^2
```

```
sage: K.<c> = PolynomialRing(ZZ)
sage: P.<x,y> = ProjectiveSpace(K,1)
sage: f = DynamicalSystem_projective([x^2 + c*y^2, y^2])
sage: f.dynatomic_polynomial([1, 2]) #_
˓needs sage.libs.pari
x^2 - x*y + (c + 1)*y^2
```

```
sage: P.<x,y> = ProjectiveSpace(QQ,1)
sage: f = DynamicalSystem_projective([x^2 + y^2, y^2])
sage: f.dynatomic_polynomial(2) #_
˓needs sage.libs.pari
x^2 + x*y + 2*y^2
sage: R.<X> = PolynomialRing(QQ)
sage: K.<c> = NumberField(X^2 + X + 2) #_
˓needs sage.rings.number_field
sage: PP = P.change_ring(K)
```

(continues on next page)

(continued from previous page)

```
sage: ff = f.change_ring(K)
sage: p = PP((c, 1))
sage: ff(ff(p)) == p
True
```

```
sage: P.<x,y> = ProjectiveSpace(QQ,1)
sage: f = DynamicalSystem_projective([x^2 + y^2, x*y])
sage: f.dynatomic_polynomial([2, 2])  
#_
˓needs sage.libs.pari
x^4 + 4*x^2*y^2 + y^4
sage: R.<X> = PolynomialRing(QQ)
sage: K.<c> = NumberField(X^4 + 4*X^2 + 1)  
#_
˓needs sage.rings.number_field
sage: PP = P.change_ring(K)
sage: ff = f.change_ring(K)
sage: p = PP((c, 1))
sage: ff.nth_iterate(p, 4) == ff.nth_iterate(p, 2)  
#_
˓needs sage.rings.number_field
True
```

```
sage: P.<x,y> = ProjectiveSpace(CC, 1)
sage: f = DynamicalSystem_projective([x^2 - CC.0/3*y^2, y^2])
sage: f.dynatomic_polynomial(2)  
#_
˓needs sage.libs.pari
(x^4*y + (-0.66666666666667*I)*x^2*y^3 - x*y^4
+ (-0.11111111111111 - 0.33333333333333*I)*y^5)/(x^2*y - x*y^2
+ (-0.
˓33333333333333*I)*y^3)
```

```
sage: P.<x,y> = ProjectiveSpace(CC, 1)
sage: f = DynamicalSystem_projective([x^2 - CC.0/5*y^2, y^2])
sage: f.dynatomic_polynomial(2)  
#_
˓needs sage.libs.pari
x^2 + x*y + (1.00000000000000 - 0.200000000000000*I)*y^2
```

```
sage: L.<t> = PolynomialRing(QuadraticField(2).maximal_order())  
#_
˓needs sage.rings.number_field
sage: P.<x, y> = ProjectiveSpace(L.fraction_field(), 1)
sage: f = DynamicalSystem_projective([x^2 + (t^2 + 1)*y^2, y^2])
sage: f.dynatomic_polynomial(2)  
#_
˓needs sage.libs.pari sage.rings.number_field
x^2 + x*y + (t^2 + 2)*y^2
```

```
sage: P.<x,y> = ProjectiveSpace(ZZ, 1)
sage: f = DynamicalSystem_projective([x^2 - 5*y^2, y^2])
sage: f.dynatomic_polynomial([3,0])
0
```

green_function(P, v, **kwds)

Evaluate the local Green's function at the place v for P with N terms of the series or to within a given error bound.

Must be over a number field or order of a number field. Note that this is the absolute local Green's function so is scaled by the degree of the base field.

Use v=0 for the archimedean place over \mathbb{Q} or field embedding. Non-archimedean places are prime ideals for

number fields or primes over \mathbb{Q} .

ALGORITHM:

See Exercise 5.29 and Figure 5.6 of [Sil2007].

INPUT:

- P – a projective point
- v – nonnegative integer; a place, use 0 for the archimedean place

kwds:

- N – (default: 10) positive integer; number of terms of the series to use
- $prec$ – (default: 100) positive integer, float point or p -adic precision
- $error_bound$ – (optional) a positive real number

OUTPUT: a real number

EXAMPLES:

```
sage: P.<x,y> = ProjectiveSpace(QQ,1)
sage: f = DynamicalSystem_projective([x^2 + y^2, x*y]);
sage: Q = P(5, 1)
sage: f.green_function(Q, 0, N=30)
1.6460930159932946233759277576
```

```
sage: P.<x,y> = ProjectiveSpace(QQ,1)
sage: f = DynamicalSystem_projective([x^2 + y^2, x*y]);
sage: Q = P(5, 1)
sage: f.green_function(Q, 0, N=200, prec=200)
1.6460930160038721802875250367738355497198064992657997569827
```

```
sage: # needs sage.rings.number_field
sage: K.<w> = QuadraticField(3)
sage: P.<x,y> = ProjectiveSpace(K,1)
sage: f = DynamicalSystem_projective([17*x^2 + 1/7*y^2, 17*w*x*y])
sage: f.green_function(P.point([w, 2], False), K.places()[1])
1.7236334013785676107373093775
sage: f.green_function(P([2, 1]), K.ideal(7), N=7)
0.48647753726382832627633818586
sage: f.green_function(P([w, 1]), K.ideal(17), error_bound=0.001)
-0.708130410394909967374178059
```

```
sage: P.<x,y> = ProjectiveSpace(QQ,1)
sage: f = DynamicalSystem_projective([x^2 + y^2, x*y])
sage: f.green_function(P.point([5,2], False), 0, N=30)
1.7315451844777407992085512000
sage: f.green_function(P.point([2,1], False), 0, N=30)
0.86577259223181088325226209926
sage: f.green_function(P.point([1,1], False), 0, N=30)
0.43288629610862338612700146098
```

height_difference_bound (*prec=None*)

Return an upper bound on the difference between the canonical height of a point with respect to this dynamical system and the absolute height of the point.

This map must be a morphism.

ALGORITHM:

Uses a Nullstellensatz argument to compute the constant. For details: see [Hutz2015].

INPUT:

- prec – (default: RealField default) positive integer, float point precision

OUTPUT: a real number

EXAMPLES:

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem_projective([x^2 + y^2, x*y])
sage: f.height_difference_bound() #_
˓needs sage.symbolic
1.38629436111989

sage: P.<x,y,z> = ProjectiveSpace(ZZ, 2)
sage: f = DynamicalSystem_projective([4*x^2 + 100*y^2, 210*x*y, 10000*z^2])
sage: f.height_difference_bound() #_
˓needs sage.symbolic
10.3089526606443
```

A number field example:

```
sage: # needs sage.rings.number_field
sage: R.<x> = QQ[]
sage: K.<c> = NumberField(x^3 - 2)
sage: P.<x,y,z> = ProjectiveSpace(K, 2)
sage: f = DynamicalSystem_projective([1/(c+1)*x^2 + c*y^2, 210*x*y, 10000*z^2])
sage: f.height_difference_bound() #_
˓needs sage.symbolic
11.3683039374269
```

```
sage: # needs sage.rings.number_field sage.symbolic
sage: P.<x,y,z> = ProjectiveSpace(QQbar, 2)
sage: f = DynamicalSystem_projective([x^2, QQbar(sqrt(-1))*y^2,
....: QQbar(sqrt(3))*z^2])
sage: f.height_difference_bound()
2.89037175789616
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem([5*x^2 + 3*x*y, y^2 + 3*x^2])
sage: f.height_difference_bound(prec=100) #_
˓needs sage.symbolic
5.3375380797013179737224159274
```

is_Lattes()

Check if `self` is a Lattes map.

OUTPUT: True if `self` is Lattes, False otherwise

EXAMPLES:

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: F = DynamicalSystem_projective([x^3, y^3])
sage: F.is_Lattes()
False
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: F = DynamicalSystem_projective([x^2 - 2*y^2, y^2])
sage: F.is_Lattes()
False
```

```
sage: P.<x,y,z> = ProjectiveSpace(QQ, 2)
sage: F = DynamicalSystem_projective([x^2 + y^2 + z^2, y^2, z^2])
sage: F.is_Lattes()
False
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: F = DynamicalSystem_projective([(x + y)*(x - y)^3, y*(2*x + y)^3])
sage: F.is_Lattes()
True
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: F = DynamicalSystem_projective([(x + y)^4, 16*x*y*(x - y)^2])
sage: F.is_Lattes()
True
```

```
sage: f = P.Lattes_map(EllipticCurve([0, 0, 0, 0, 2]), 2)
sage: f.is_Lattes()
True
```

```
sage: f = P.Lattes_map(EllipticCurve([0, 0, 0, 0, 2]), 2)
sage: L.<i> = CyclotomicField(4)
sage: M = Matrix([[i, 0], [0, -i]])
sage: f.conjugate(M)
Dynamical System of Projective Space of dimension 1 over
Cyclotomic Field of order 4 and degree 2
Defn: Defined on coordinates by sending (x : y) to
      ((-1/4*i)*x^4 + (-4*i)*x*y^3 : (-i)*x^3*y + (2*i)*y^4)
sage: f.is_Lattes()
True
```

REFERENCES:

- [Mil2006]

is_PGL_minimal (prime_list=None)

Check if this dynamical system is a minimal model in its conjugacy class.

See [BM2012] and [Mol2015] for a description of the algorithm. For polynomial maps it uses [HS2018].

INPUT:

- prime_list – (optional) list of primes to check minimality

OUTPUT: boolean

EXAMPLES:

```
sage: PS.<X,Y> = ProjectiveSpace(QQ,1)
sage: f = DynamicalSystem_projective([X^2 + 3*Y^2, X*Y])
sage: f.is_PGL_minimal() #_
˓needs sage.rings.function_field
True
```

```
sage: PS.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem_projective([6*x^2 + 12*x*y + 7*y^2, 12*x*y])
sage: f.is_PGL_minimal()
# needs sage.rings.function_field
False
```

```
sage: PS.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem_projective([6*x^2 + 12*x*y + 7*y^2, y^2])
sage: f.is_PGL_minimal()
# needs sage.rings.function_field
False
```

is_chebyshev()

Check if self is a Chebyshev polynomial.

OUTPUT: True if self is Chebyshev, False otherwise

EXAMPLES:

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: F = DynamicalSystem_projective([x^4, y^4])
sage: F.is_chebyshev()
False
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: F = DynamicalSystem_projective([x^2 + y^2, y^2])
sage: F.is_chebyshev()
False
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: F = DynamicalSystem_projective([2*x^2 - y^2, y^2])
sage: F.is_chebyshev()
True
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: F = DynamicalSystem_projective([x^3, 4*y^3 - 3*x^2*y])
sage: F.is_chebyshev()
True
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: F = DynamicalSystem_projective([2*x^2 - y^2, y^2])
sage: L.<i> = CyclotomicField(4)
sage: M = Matrix([[0,i],[-i,0]])
sage: F.conjugate(M)
Dynamical System of Projective Space of dimension 1 over
Cyclotomic Field of order 4 and degree 2
Defn: Defined on coordinates by sending (x : y) to
      ((-i)*x^2 : (-i)*x^2 + (2*i)*y^2)
sage: F.is_chebyshev()
True
```

REFERENCES:

- [Mil2006]

is_dynamical_belyi_map()

Return if this dynamical system is a dynamical Belyi map.

We define a dynamical Belyi map to be a map conjugate to a dynamical system $f : \mathbb{P}^1 \rightarrow \mathbb{P}^1$ where the branch points are contained in $\{0, 1, \infty\}$ and the postcritical set is contained in $\{0, 1, \infty\}$.

Output: Boolean

EXAMPLES:

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem_projective([-2*x^3 - 9*x^2*y - 12*x*y^2 - 6*y^3, y^3])
sage: f.is_dynamical_belyi_map()
# needs sage.rings.number_field
True
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem_projective([5*x^7 - 7*x^6*y, -7*x*y^6 + 5*y^7])
sage: f.is_dynamical_belyi_map()
# needs sage.rings.number_field
True
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem_projective([x^2 + y^2, y^2])
sage: f.is_dynamical_belyi_map()
# needs sage.rings.number_field
False
```

```
sage: # needs sage.rings.number_field
sage: F = QuadraticField(-7)
sage: P.<x,y> = ProjectiveSpace(F, 1)
sage: f = DynamicalSystem_projective([5*x^7 - 7*x^6*y, -7*x*y^6 + 5*y^7])
sage: f.is_dynamical_belyi_map()
True
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem_projective([2*x^3 + 3*x^2*y - 3*x*y^2 + 2*y^3,
....: x^3 + y^3])
sage: f.is_dynamical_belyi_map()
# needs sage.rings.number_field
False
```

```
sage: # needs sage.rings.number_field
sage: R.<t> = PolynomialRing(QQ)
sage: N.<c> = NumberField(t^3 - 2)
sage: P.<x,y> = ProjectiveSpace(N, 1)
sage: f=DynamicalSystem_projective([x^2 + c*y^2, x*y])
sage: f.is_dynamical_belyi_map()
False
```

```
sage: P.<x,y> = ProjectiveSpace(GF(7), 1)
sage: f = DynamicalSystem_projective([x^3 + 6*y^3, y^3])
sage: f.is_dynamical_belyi_map()
# needs sage.libs.pari
False
```

is_postcritically_finite(err=0.01, use_algebraic_closure=True)

Determine if this dynamical system is post-critically finite.

Only for endomorphisms of \mathbb{P}^1 . It checks if each critical point is preperiodic. The optional parameter `err` is passed into `is_preperiodic()` as part of the preperiodic check.

The computations can be done either over the algebraic closure of the base field or over the minimal extension of the base field that contains the critical points.

INPUT:

- `err` – (default: 0.01) positive real number
- `use_algebraic_closure` – boolean (default: `True`); if `True`, uses the algebraic closure. If `False`, uses the smallest extension of the base field containing all the critical points.

OUTPUT: boolean

EXAMPLES:

```
sage: P.<x,y> = ProjectiveSpace(QQ,1)
sage: f = DynamicalSystem_projective([x^2 - y^2, y^2])
sage: f.is_postcritically_finite() #_
˓needs sage.rings.number_field
True
```

```
sage: P.<x,y> = ProjectiveSpace(QQ,1)
sage: f = DynamicalSystem_projective([x^3 - y^3, y^3])
sage: f.is_postcritically_finite() #_
˓needs sage.rings.number_field
False
```

```
sage: # needs sage.rings.number_field
sage: R.<z> = QQ[]
sage: K.<v> = NumberField(z^8 + 3*z^6 + 3*z^4 + z^2 + 1)
sage: PS.<x,y> = ProjectiveSpace(K,1)
sage: f = DynamicalSystem_projective([x^3 + v*y^3, y^3])
sage: f.is_postcritically_finite() # long time
True
```

```
sage: P.<x,y> = ProjectiveSpace(QQ,1)
sage: f = DynamicalSystem_projective([6*x^2 + 16*x*y + 16*y^2,
....: -3*x^2 - 4*x*y - 4*y^2])
sage: f.is_postcritically_finite() #_
˓needs sage.rings.number_field
True
```

```
sage: # needs sage.libs.gap sage.rings.number_field
sage: K = UniversalCyclotomicField()
sage: P.<x,y> = ProjectiveSpace(K,1)
sage: F = DynamicalSystem_projective([x^2 - y^2, y^2], domain=P)
sage: F.is_postcritically_finite()
True
```

```
sage: P.<x,y> = ProjectiveSpace(QQ,1)
sage: f = DynamicalSystem_projective([8*x^4 - 8*x^2*y^2 + y^4, y^4])
sage: f.is_postcritically_finite(use_algebraic_closure=False) # long time
True
```

```
sage: P.<x,y> = ProjectiveSpace(QQ,1)
sage: f = DynamicalSystem_projective([x^4 - x^2*y^2 + y^4, y^4])
```

(continues on next page)

(continued from previous page)

```
sage: f.is_postcritically_finite(use_algebraic_closure=False) #_
˓needs sage.rings.number_field
False
```

```
sage: # needs sage.rings.number_field
sage: P.<x,y> = ProjectiveSpace(QQbar, 1)
sage: f = DynamicalSystem_projective([x^4 - x^2*y^2, y^4])
sage: f.is_postcritically_finite()
False
```

minimal_model (*return_transformation=False*, *prime_list=None*, *algorithm=None*, *check_primes=True*)

Determine if this dynamical system is minimal.

This dynamical system must be defined over the projective line over the rationals. In particular, determine if this map is affine minimal, which is enough to decide if it is minimal or not. See Proposition 2.10 in [BM2012].

INPUT:

- *return_transformation* – boolean (default: *False*); this signals a return of the PGL_2 transformation to conjugate this map to the calculated minimal model
- *prime_list* – (optional) a list of primes, in case one only wants to determine minimality at those specific primes
- *algorithm* – (optional) string; can be one of the following:
- **check_primes** – (optional) boolean; this signals whether to check whether each element in *prime_list* is a prime
 - 'BM' – the Bruin-Molnar algorithm [BM2012]
 - 'HS' – the Hutz-Stoll algorithm [HS2018]

OUTPUT:

- a dynamical system on the projective line which is a minimal model of this map
- a $PGL(2, \mathbb{Q})$ element which conjugates this map to a minimal model

EXAMPLES:

```
sage: PS.<X,Y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem_projective([X^2 + 3*Y^2, X*Y])
sage: f.minimal_model(return_transformation=True) #_
˓needs sage.rings.function_field
(
Dynamical System of Projective Space of dimension 1 over Rational
Field
Defn: Defined on coordinates by sending (X : Y) to
(X^2 + 3*Y^2 : X*Y)
,
[1 0]
[0 1]
)
```

```
sage: PS.<X,Y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem_projective([7365/2*X^4 + 6282*X^3*Y + 4023*X^2*Y^2
```

(continues on next page)

(continued from previous page)

```

....:
....:
→2
....:
sage: f.minimal_model(return_transformation=True)      #
→needs sage.rings.function_field
(
Dynamical System of Projective Space of dimension 1 over Rational Field
Defn: Defined on coordinates by sending (X : Y) to
(9847*X^4 + 28088*X^3*Y + 30048*X^2*Y^2 + 14288*X*Y^3 + 2548*Y^4
: -12329*X^4 - 35164*X^3*Y - 37614*X^2*Y^2 - 17884*X*Y^3 - 3189*Y^4),
[2 1]
[0 1]
)

```

```

sage: PS.<x,y> = ProjectiveSpace(QQ,1)
sage: f = DynamicalSystem_projective([6*x^2 + 12*x*y + 7*y^2, 12*x*y])      #
sage: f.minimal_model()      #
→needs sage.rings.function_field
Dynamical System of Projective Space of dimension 1 over Rational Field
Defn: Defined on coordinates by sending (x : y) to
(x^2 + 12*x*y + 42*y^2 : 2*x*y)

```

```

sage: PS.<x,y> = ProjectiveSpace(ZZ,1)
sage: f = DynamicalSystem_projective([6*x^2 + 12*x*y + 7*y^2, 12*x*y + 42*y^2])
sage: g,M = f.minimal_model(return_transformation=True, algorithm='BM')      #
→needs sage.rings.function_field
sage: f.conjugate(M) == g      #
→needs sage.rings.function_field
True

```

```

sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem([2*x^2, y^2])
sage: f.minimal_model(return_transformation=True)      #
→needs sage.rings.function_field
(
Dynamical System of Projective Space of dimension 1 over Rational Field
Defn: Defined on coordinates by sending (x : y) to
(x^2 : y^2),
[1 0]
[0 2]
)
sage: f.minimal_model(prime_list=[3])      #
→needs sage.rings.function_field
Dynamical System of Projective Space of dimension 1 over Rational Field
Defn: Defined on coordinates by sending (x : y) to
(2*x^2 : y^2)

```

REFERENCES:

- [BM2012]
- [Mol2015]
- [HS2018]

multiplier(*P, n, check=True*)

Return the multiplier of the point *P* of period *n* with respect to this dynamical system.

INPUT:

- *P* – a point on domain of this map
- *n* – positive integer, the period of *P*
- *check* – boolean (default: `True`); verify that *P* has period *n*

OUTPUT:

A square matrix of size `self.codomain().dimension_relative()` in the `base_ring` of this dynamical system.

EXAMPLES:

```
sage: P.<x,y,z> = ProjectiveSpace(QQ, 2)
sage: f = DynamicalSystem_projective([x^2, y^2, 4*z^2])
sage: Q = P.point([4,4,1], False)
sage: f.multiplier(Q, 1)
[2 0]
[0 2]
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem_projective([7*x^2 - 28*y^2, 24*x*y])
sage: f.multiplier(P(2,5), 4)
[231361/20736]
```

```
sage: P.<x,y> = ProjectiveSpace(CC, 1)
sage: f = DynamicalSystem_projective([x^3 - 25*x*y^2 + 12*y^3, 12*x^3])
sage: f.multiplier(P(1,1), 5)
[0.389017489711934]
```

```
sage: P.<x,y> = ProjectiveSpace(RR, 1)
sage: f = DynamicalSystem_projective([x^2 - 2*y^2, y^2])
sage: f.multiplier(P(2,1), 1)
[4.00000000000000]
```

```
sage: P.<x,y> = ProjectiveSpace(Qp(13), 1) #_
→needs sage.rings.padics
sage: f = DynamicalSystem_projective([x^2 - 29/16*y^2, y^2])
sage: f.multiplier(P(5,4), 3) #_
→needs sage.rings.padics
[6 + 8*13 + 13^2 + 8*13^3 + 13^4 + 8*13^5 + 13^6 + 8*13^7 + 13^8 +
8*13^9 + 13^10 + 8*13^11 + 13^12 + 8*13^13 + 13^14 + 8*13^15 + 13^16 +
8*13^17 + 13^18 + 8*13^19 + O(13^20)]
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem_projective([x^2 - y^2, y^2])
sage: f.multiplier(P(0,1), 1)
Traceback (most recent call last):
...
ValueError: (0 : 1) is not periodic of period 1
```

multiplier_spectra(*n, formal=False, type='point', use_algebraic_closure=True, check=True*)

Compute the *n* multiplier spectra of this dynamical system.

This is the set of multipliers of all periodic points of period n included with the appropriate multiplicity. User can also specify to compute the formal n multiplier spectra instead which includes the multipliers of all formal periodic points of period n with appropriate multiplicity. The map must be defined over projective space over a number field or finite field.

By default, the computations are done over the algebraic closure of the base field. If the map is defined over projective space of dimension 1, the computation can be done over the minimal extension of the base field that contains the periodic points. Otherwise, it will be done over the base ring of the map.

INPUT:

- n – positive integer, the period
- `formal` – boolean (default: `False`); `True` specifies to find the formal n multiplier spectra of this map and `False` specifies to find the n multiplier spectra
- `type` – (default: `'point'`) string; either `'point'` or `'cycle'` depending on whether you compute one multiplier per point or one per cycle
- `use_algebraic_closure` – boolean (default: `True`); if `True` uses the algebraic closure. Using the algebraic closure can sometimes lead to numerical instability and extraneous errors. For most accurate results in dimension 1, set to `False`. If `False`, and the map is defined over projective space of dimension 1, uses the smallest extension of the base field containing all the periodic points. If the map is defined over projective space of dimension greater than 1, then the base ring of the map is used.
- `check` – boolean (default: `True`); whether to check if the full multiplier spectra was computed. If `False`, can lead to mathematically incorrect answers in dimension greater than 1. Ignored if `use_algebraic_closure` is `True` or if this dynamical system is defined over projective space of dimension 1.

OUTPUT:

A list of field elements if the domain of the map is projective space of dimension 1. If the domain of the map is projective space of dimension greater than 1, a list of matrices

EXAMPLES:

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem_projective([x^2 - 3/4*y^2, y^2])
sage: sorted(f.multiplier_spectra(2, type='point')) #_
˓needs sage.rings.number_field
[0, 1, 1, 1, 9]
sage: sorted(f.multiplier_spectra(2, type='cycle')) #_
˓needs sage.rings.number_field
[0, 1, 1, 9]
```

```
sage: P.<x,y,z> = ProjectiveSpace(QQ, 2)
sage: f = DynamicalSystem_projective([x^2, z^2, y^2])
sage: f.multiplier_spectra(1) #_
˓needs sage.rings.number_field
[
[ 2 1 - 1.732050807568878?*I]
[ 0           -2],
[ 2 1 + 1.732050807568878?*I] [ 0  0] [ 0  0]
[ 0           -2], [ 0 -2], [ 0 -2],
[ 0  0] [ 0  0] [ 2 -2]
[ 0 -2], [ 0  0], [ 0 -2]
]
```

```
sage: P.<x,y,z> = ProjectiveSpace(QQ, 2)
sage: f = DynamicalSystem_projective([x^2, z^2, y^2])
sage: f.multiplier_spectra(2, formal=True) # long time
[
[4 0] [4 0] [4 0] [4 0] [4 0] [4 0] [4 0] [0 0] [0 0]
[0 4], [0 0], [0 0], [0 4], [0 4], [0 0], [0 0], [0 4], [0 0],
[4 0] [4 0] [4 0]
[0 4], [0 4], [0 0], [0 0]
]
```

```
sage: # needs sage.rings.number_field
sage: set_verbose(None)
sage: z = QQ['z'].0
sage: K.<w> = NumberField(z^4 - 4*z^2 + 1, 'z')
sage: P.<x,y> = ProjectiveSpace(K, 1)
sage: f = DynamicalSystem_projective([x^2 - w/4*y^2, y^2])
sage: sorted(f.multiplier_spectra(2, formal=False, type='cycle'))
[0,
 0.0681483474218635? - 1.930649271699173?*I,
 0.0681483474218635? + 1.930649271699173?*I,
 5.931851652578137? + 0.?e-49*I]
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem_projective([4608*x^10 - 2910096*x^9*y + 325988068*x^
    ↪8*y^2
....: + 31825198932*x^7*y^3 - 4139806626613*x^6*y^4 - ↪
....: 44439736715486*x^5*y^5
....: + 2317935971590902*x^4*y^6 - 15344764859590852*x^3*y^7
....: + 2561851642765275*x^2*y^8 + 113578270285012470*x*y^9
....: - 150049940203963800*y^10, 4608*y^10])
sage: sorted(f.multiplier_spectra(1)) #_
    ↪needs sage.rings.number_field
[-119820502365680843999,
 -7198147681176255644585/256,
 -3086380435599991/9,
 -3323781962860268721722583135/35184372088832,
 -4290991994944936653/2097152,
 0,
 529278480109921/256,
 1061953534167447403/19683,
 848446157556848459363/19683,
 82911372672808161930567/8192,
 3553497751559301575157261317/8192]
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem_projective([x^2 - 7/4*y^2, y^2])
sage: f.multiplier_spectra(3, formal=True, type='cycle') #_
    ↪needs sage.rings.number_field
[1, 1]
sage: f.multiplier_spectra(3, formal=True, type='point') #_
    ↪needs sage.rings.number_field
[1, 1, 1, 1, 1, 1]
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem_projective([x^4 + 3*y^4, 4*x^2*y^2])
sage: f.multiplier_spectra(1, use_algebraic_closure=False) #_
```

(continues on next page)

(continued from previous page)

```

→needs sage.rings.number_field
[0,
 -1,
 1/128*a^5 - 13/384*a^4 + 5/96*a^3 + 1/16*a^2 + 43/128*a + 303/128,
 -1/288*a^5 + 1/96*a^4 + 1/24*a^3 - 1/3*a^2 + 5/32*a - 115/32,
 -5/1152*a^5 + 3/128*a^4 - 3/32*a^3 + 13/48*a^2 - 63/128*a - 227/128]
sage: f.multiplier_spectra(1) #_
→needs sage.rings.number_field
[0,
 -1,
 1.951373035591442?,
 -2.475686517795721? - 0.730035681602057?*I,
 -2.475686517795721? + 0.730035681602057?*I]
```

```

sage: P.<x,y> = ProjectiveSpace(GF(5), 1)
sage: f = DynamicalSystem_projective([x^4 + 2*y^4, 4*x^2*y^2])
sage: f.multiplier_spectra(1, use_algebraic_closure=False) #_
→needs sage.rings.finite_rings
[0, 3*a + 3, 2*a + 1, 1, 1]
sage: f.multiplier_spectra(1)
[0, 2*z2 + 1, 3*z2 + 3, 1, 1]
```

```

sage: # needs sage.rings.number_field
sage: P.<x,y> = ProjectiveSpace(QQbar, 1)
sage: f = DynamicalSystem_projective([x^5 + 3*y^5, 4*x^3*y^2])
sage: f.multiplier_spectra(1)
[0,
 -4.106544657178796?,
 -7/4,
 1.985176555073911?,
 -3.064315948947558? - 1.150478041113253?*I,
 -3.064315948947558? + 1.150478041113253?*I]
```

```

sage: K = GF(3).algebraic_closure()
sage: P.<x,y> = ProjectiveSpace(K, 1)
sage: f = DynamicalSystem_projective([x^5 + 2*y^5, 4*x^3*y^2])
sage: f.multiplier_spectra(1)
[0, z3 + 2, z3 + 1, z3, 1, 1]
```

`nth_iterate(P, n, **kwds)`

Return the n-th iterate of the point P by this dynamical system.

If normalize is True, then the coordinates are automatically normalized.

Todo

Is there a more efficient way to do this?

INPUT:

- P – a point in this map's domain
- n – positive integer

kwds:

- `normalize – boolean (default: False)`

OUTPUT: a point in this map's codomain

EXAMPLES:

```
sage: P.<x,y> = ProjectiveSpace(ZZ,1)
sage: f = DynamicalSystem_projective([x^2 + y^2, 2*y^2])
sage: Q = P(1,1)
sage: f.nth_iterate(Q,4)
(32768 : 32768)
```

```
sage: P.<x,y> = ProjectiveSpace(ZZ,1)
sage: f = DynamicalSystem_projective([x^2 + y^2, 2*y^2])
sage: Q = P(1,1)
sage: f.nth_iterate(Q, 4, normalize=True)
(1 : 1)
```

```
sage: P.<x,y,z> = ProjectiveSpace(QQ,2)
sage: f = DynamicalSystem_projective([x^2, 2*y^2, z^2 - x^2])
sage: Q = P(2,7,1)
sage: f.nth_iterate(Q,2)
(-16/7 : -2744 : 1)
```

```
sage: R.<t> = PolynomialRing(QQ)
sage: P.<x,y,z> = ProjectiveSpace(R,2)
sage: f = DynamicalSystem_projective([x^2 + t*y^2, (2-t)*y^2, z^2])
sage: Q = P(2 + t, 7, t)
sage: f.nth_iterate(Q,2)
(t^4 + 2507*t^3 - 6787*t^2 + 10028*t + 16
 : -2401*t^3 + 14406*t^2 - 28812*t + 19208 : t^4)
```

```
sage: P.<x,y,z> = ProjectiveSpace(ZZ,2)
sage: X = P.subscheme(x^2-y^2)
sage: f = DynamicalSystem_projective([x^2, y^2, z^2], domain=X)
sage: f.nth_iterate(X(2,2,3), 3)
(256 : 256 : 6561)
```

```
sage: K.<c> = FunctionField(QQ)
sage: P.<x,y> = ProjectiveSpace(K,1)
sage: f = DynamicalSystem_projective([x^3 - 2*x*y^2 - c*y^3, x*y^2])
sage: f.nth_iterate(P(c,1), 2)
((c^6 - 9*c^4 + 25*c^2 - c - 21)/(c^2 - 3) : 1)

sage: P.<x,y,z> = ProjectiveSpace(QQ,2)
sage: f = DynamicalSystem_projective([x^2 + 3*y^2, 2*y^2, z^2])
sage: f.nth_iterate(P(2, 7, 1), -2)
Traceback (most recent call last):
...
TypeError: must be a forward orbit
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem_projective([x^3, x*y^2], domain=P)
sage: f.nth_iterate(P(0, 1), 3, check=False)
(0 : 0)
sage: f.nth_iterate(P(0, 1), 3)
```

(continues on next page)

(continued from previous page)

```
Traceback (most recent call last):
...
ValueError: [0, 0] does not define a valid projective point since all entries ↴
    ↴ are zero
```

```
sage: P.<x,y> = ProjectiveSpace(ZZ, 1)
sage: f = DynamicalSystem_projective([x^3, x*y^2], domain=P)
sage: f.nth_iterate(P(2,1), 3, normalize=False)
(134217728 : 524288)
sage: f.nth_iterate(P(2,1), 3, normalize=True)
(256 : 1)
```

```
sage: P.<x,y> = ProjectiveSpace(QQ,1)
sage: f = DynamicalSystem([x + y, y])
sage: Q = (3,1)
sage: f.nth_iterate(Q,0)
(3 : 1)
```

`nth_iterate_map`(*n, normalize=False*)Return the *n*-th iterate of this dynamical system.

ALGORITHM:

Uses a form of successive squaring to reducing computations.

Todo

This could be improved.

INPUT:

- *n* – positive integer
- *normalize* – boolean; remove gcd's during iteration

OUTPUT: a projective dynamical system

EXAMPLES:

```
sage: P.<x,y> = ProjectiveSpace(QQ,1)
sage: f = DynamicalSystem_projective([x^2 + y^2, y^2])
sage: f.nth_iterate_map(2)
Dynamical System of Projective Space of dimension 1 over Rational Field
Defn: Defined on coordinates by sending (x : y) to
(x^4 + 2*x^2*y^2 + 2*y^4 : y^4)
```

```
sage: P.<x,y> = ProjectiveSpace(CC,1)
sage: f = DynamicalSystem_projective([x^2 - y^2, x*y])
sage: f.nth_iterate_map(3)
Dynamical System of Projective Space of dimension 1
over Complex Field with 53 bits of precision
Defn: Defined on coordinates by sending (x : y) to
(x^8 + (-7.00000000000000)*x^6*y^2 + 13.0000000000000*x^4*y^4
+ (-7.00000000000000)*x^2*y^6 + y^8
: x^7*y + (-4.00000000000000)*x^5*y^3 + 4.00000000000000*x^3*y^5 - ↴
    ↴ x*y^7)
```

```
sage: P.<x,y,z> = ProjectiveSpace(ZZ, 2)
sage: f = DynamicalSystem_projective([x^2 - y^2, x*y, z^2 + x^2])
sage: f.nth_iterate_map(2)
Dynamical System of Projective Space of dimension 2 over Integer Ring
Defn: Defined on coordinates by sending (x : y : z) to
      (x^4 - 3*x^2*y^2 + y^4 : x^3*y - x*y^3
       : 2*x^4 - 2*x^2*y^2 + y^4 + 2*x^2*z^2 + z^4)
```

```
sage: P.<x,y,z> = ProjectiveSpace(QQ, 2)
sage: X = P.subscheme(x*z-y^2)
sage: f = DynamicalSystem_projective([x^2, x*z, z^2], domain=X)
sage: f.nth_iterate_map(2)
→needs sage.rings.function_field #_
Dynamical System of Closed subscheme of Projective Space of dimension
2 over Rational Field defined by:
-y^2 + x*z
Defn: Defined on coordinates by sending (x : y : z) to
      (x^4 : x^2*z^2 : z^4)
```

```
sage: P.<x,y,z> = ProjectiveSpace(QQ, 2)
sage: f = DynamicalSystem_projective([y^2 * z^3, y^3 * z^2, x^5])
sage: f.nth_iterate_map(5, normalize=True)
Dynamical System of Projective Space of dimension 2 over Rational Field
Defn: Defined on coordinates by sending (x : y : z) to
      (y^202*z^443 : x^140*y^163*z^342 : x^645)
```

`nth_preimage_tree(Q, n, **kwd)`

Return the n -th pre-image tree rooted at Q .

This map must be an endomorphism of the projective line defined over a number field, algebraic field, or finite field.

INPUT:

- Q – a point in the domain of this map
- n – positive integer, the depth of the pre-image tree

kwd:

- `return_points` – boolean (default: `False`); if `True`, return a list of lists where the index i is the level of the tree and the elements of the list at that index are the i -th preimage points as an algebraic element of the splitting field of the polynomial $f^n - Q = 0$.
- `numerical` – boolean (default: `False`); calculate pre-images numerically. Note if this is set to `True`, preimage points are displayed as complex numbers.
- `prec` – (default: 100) positive integer; the precision of the `ComplexField` if we compute the preimage points numerically
- `display_labels` – boolean (default: `True`); whether to display vertex labels. Since labels can be very cluttered, can set `display_labels` to `False` and use `return_points` to get a hold of the points themselves, either as algebraic or complex numbers.
- `display_complex` – boolean (default: `False`); display vertex labels as complex numbers. Note if this option is chosen that we must choose an embedding from the splitting field `field_def` of the n -th-preimage equation into \mathbf{C} . We make the choice of the first embedding returned by `field_def.embeddings(ComplexField())`.

- `digits` – positive integer; the number of decimal digits to display for complex numbers. This only applies if `display_complex` is set to `True`.

OUTPUT:

If `return_points` is `False`, a `GraphPlot` object representing the n -th pre-image tree. If `return_points` is `True`, a tuple `(GP, points)`, where `GP` is a `GraphPlot` object, and `points` is a list of lists as described above under `return_points`.

EXAMPLES:

```
sage: P.<x,y> = ProjectiveSpace(QQ,1)
sage: f = DynamicalSystem_projective([x^2 + y^2, y^2])
sage: Q = P(0,1)
sage: f.nth_preimage_tree(Q, 2) #_
→needs sage.plot
GraphPlot object for Digraph on 7 vertices
```

```
sage: P.<x,y> = ProjectiveSpace(GF(3), 1)
sage: f = DynamicalSystem_projective([x^2 + x*y + y^2, y^2])
sage: Q = P(0,1)
sage: f.nth_preimage_tree(Q, 2, return_points=True) #_
→needs sage.plot
(GraphPlot object for Digraph on 4 vertices,
 [[(0 : 1)], [(1 : 1)], [(0 : 1), (2 : 1)]])
```

orbit(P, N, kwds)**

Return the orbit of the point P by this dynamical system.

Let F be this dynamical system. If N is an integer return $[P, F(P), \dots, F^N(P)]$. If N is a list or tuple $N = [m, k]$ return $[F^m(P), \dots, F^k(P)]$. Automatically normalize the points if `normalize=True`. Perform the checks on point initialization if `check=True`.

INPUT:

- P – a point in this dynamical system's domain
- n – nonnegative integer or list or tuple of two nonnegative integers

`kwds`:

- `check` – boolean (default: `True`)
- `normalize` – boolean (default: `False`)

OUTPUT: list of points in this dynamical system's codomain

EXAMPLES:

```
sage: P.<x,y,z> = ProjectiveSpace(ZZ,2)
sage: f = DynamicalSystem_projective([x^2 + y^2, y^2 - z^2, 2*z^2])
sage: f.orbit(P(1,2,1), 3)
[(1 : 2 : 1), (5 : 3 : 2), (34 : 5 : 8), (1181 : -39 : 128)]
```

```
sage: P.<x,y,z> = ProjectiveSpace(ZZ,2)
sage: f = DynamicalSystem_projective([x^2 + y^2, y^2 - z^2, 2*z^2])
sage: f.orbit(P(1,2,1), [2,4])
[(34 : 5 : 8), (1181 : -39 : 128), (1396282 : -14863 : 32768)]
```

```
sage: P.<x,y,z> = ProjectiveSpace(ZZ,2)
sage: X = P.subscheme(x^2 - y^2)
sage: f = DynamicalSystem_projective([x^2, y^2, x*z], domain=X)
sage: f.orbit(X(2,2,3), 3, normalize=True)
[(2 : 2 : 3), (2 : 2 : 3), (2 : 2 : 3), (2 : 2 : 3)]
```

```
sage: P.<x,y> = ProjectiveSpace(QQ,1)
sage: f = DynamicalSystem_projective([x^2 + y^2, y^2])
sage: f.orbit(P.point([1,2], False), 4, check=False)
[(1 : 2), (5 : 4), (41 : 16), (1937 : 256), (3817505 : 65536)]
```

```
sage: K.<c> = FunctionField(QQ)
sage: P.<x,y> = ProjectiveSpace(K,1)
sage: f = DynamicalSystem_projective([x^2 + c*y^2, y^2])
sage: f.orbit(P(0,1), 3)
[(0 : 1), (c : 1), (c^2 + c : 1), (c^4 + 2*c^3 + c^2 + c : 1)]
```

```
sage: P.<x,y> = ProjectiveSpace(QQ,1)
sage: f = DynamicalSystem_projective([x^2 + y^2, y^2], domain=P)
sage: f.orbit(P.point([1, 2], False), 4, check=False)
[(1 : 2), (5 : 4), (41 : 16), (1937 : 256), (3817505 : 65536)]
```

```
sage: P.<x,y> = ProjectiveSpace(QQ,1)
sage: f = DynamicalSystem_projective([x^2, 2*y^2], domain=P)
sage: f.orbit(P(2, 1), [-1, 4])
Traceback (most recent call last):
...
TypeError: orbit bounds must be nonnegative
sage: f.orbit(P(2, 1), 0.1)
Traceback (most recent call last):
...
TypeError: Attempt to coerce non-integral RealNumber to Integer
```

```
sage: P.<x,y> = ProjectiveSpace(QQ,1)
sage: f = DynamicalSystem_projective([x^3, x*y^2], domain=P)
sage: f.orbit(P(0, 1), 3)
Traceback (most recent call last):
...
ValueError: [0, 0] does not define a valid projective point since all entries ↴ are zero
sage: f.orbit(P(0, 1), 3, check=False)
[(0 : 1), (0 : 0), (0 : 0), (0 : 0)]
```

```
sage: P.<x,y> = ProjectiveSpace(ZZ, 1)
sage: f = DynamicalSystem_projective([x^3, x*y^2], domain=P)
sage: f.orbit(P(2,1), 3, normalize=False)
[(2 : 1), (8 : 2), (512 : 32), (134217728 : 524288)]
sage: f.orbit(P(2,1), 3, normalize=True)
[(2 : 1), (4 : 1), (16 : 1), (256 : 1)]
```

```
sage: P.<x,y,z> = ProjectiveSpace(QQ,2)
sage: f = DynamicalSystem_projective([x^2, y^2, x*z])
sage: f.orbit((2/3, 1/3), 3)
[(2/3 : 1/3 : 1), (2/3 : 1/6 : 1), (2/3 : 1/24 : 1), (2/3 : 1/384 : 1)]
```

periodic_points (n , $minimal=True$, $formal=False$, $R=None$, $algorithm='variety'$, $return_scheme=False$)

Compute the periodic points of period n of this dynamical system defined over the ring R or the base ring of the map.

This can be done either by finding the rational points on the variety defining the points of period n , or, for finite fields, finding the cycle of appropriate length in the cyclegraph. For small cardinality fields, the cyclegraph algorithm is effective for any map and length cycle, but is slow when the cyclegraph is large. The variety algorithm is good for small period, degree, and dimension, but is slow as the defining equations of the variety get more complicated.

For rational maps, where there are potentially infinitely many periodic points of a given period, you must use the `return_scheme` option. Note that this scheme will include the indeterminacy locus.

INPUT:

- n – positive integer
- $minimal$ – boolean (default: `True`); `True` specifies to find only the periodic points of minimal period n and `False` specifies to find all periodic points of period n
- $formal$ – boolean (default: `False`); `True` specifies to find the formal periodic points only. The formal periodic points are the points in the support of the dynatomic cycle.
- R – (optional) a commutative ring. Defaults to the base ring of this map
- $algorithm$ – (default: `'variety'`) must be one of the following:
 - `'variety'` – find the rational points on the appropriate variety
 - `'cyclegraph'` – find the cycles from the cycle graph
- $return_scheme$ – return a subscheme of the ambient space that defines the n th periodic points

OUTPUT:

A list of periodic points of this map or the subscheme defining the periodic points.

EXAMPLES:

```
sage: # needs sage.rings.number_field
sage: set_verbose(None)
sage: P.<x,y> = ProjectiveSpace(QQbar, 1)
sage: f = DynamicalSystem_projective([x^2 - x*y + y^2, x^2 - y^2 + x*y])
sage: f.periodic_points(1)
[(-0.500000000000000? - 0.866025403784439?*I : 1),
 (-0.500000000000000? + 0.866025403784439?*I : 1),
 (1 : 1)]
```

```
sage: # needs sage.rings.number_field
sage: P.<x,y,z> = ProjectiveSpace(QuadraticField(5, 't'), 2)
sage: f = DynamicalSystem_projective([x^2 - 21/16*z^2, y^2 - z^2, z^2])
sage: f.periodic_points(2)
[(-5/4 : -1 : 1), (-5/4 : -1/2*t + 1/2 : 1), (-5/4 : 0 : 1),
 (-5/4 : 1/2*t + 1/2 : 1), (-3/4 : -1 : 1), (-3/4 : 0 : 1),
 (1/4 : -1 : 1), (1/4 : -1/2*t + 1/2 : 1), (1/4 : 0 : 1),
 (1/4 : 1/2*t + 1/2 : 1), (7/4 : -1 : 1), (7/4 : 0 : 1)]
```

```
sage: P.<x,y,z> = ProjectiveSpace(QQ, 2)
sage: f = DynamicalSystem_projective([x^2 - 3/4*y^2, y^2, z^2])
sage: f.periodic_points(2, formal=True)
# needs sage.rings.function_field
[(-1/2 : 1 : 0), (-1/2 : 1 : 1)]
```

```
sage: # needs sage.rings.number_field
sage: w = QQ['w'].0
sage: K = NumberField(w^6 - 3*w^5 + 5*w^4 - 5*w^3 + 5*w^2 - 3*w + 1, 's')
sage: P.<x,y,z> = ProjectiveSpace(K, 2)
sage: f = DynamicalSystem_projective([x^2 + z^2, y^2 + x^2, z^2 + y^2])
sage: sorted(f.periodic_points(1), key=str) #_
→needs sage.rings.function_field
[(-2*s^5 + 4*s^4 - 5*s^3 + 3*s^2 - 4*s : -2*s^5 + 5*s^4 - 7*s^3 + 6*s^2 - 7*s
→+ 3 : 1),
 (-s^5 + 3*s^4 - 4*s^3 + 4*s^2 - 4*s + 2 : -s^5 + 2*s^4 - 2*s^3 + s^2 - s :_
→1),
 (-s^5 + 3*s^4 - 5*s^3 + 4*s^2 - 3*s + 1 : s^5 - 2*s^4 + 3*s^3 - 3*s^2 + 4*s -
→1 : 1),
 (1 : 1 : 1),
 (2*s^5 - 6*s^4 + 9*s^3 - 8*s^2 + 7*s - 4 : 2*s^5 - 5*s^4 + 7*s^3 - 5*s^2 +_
→6*s - 2 : 1),
 (s^5 - 2*s^4 + 2*s^3 + s : s^5 - 3*s^4 + 4*s^3 - 3*s^2 + 2*s - 1 : 1),
 (s^5 - 2*s^4 + 3*s^3 - 3*s^2 + 3*s - 1 : -s^5 + 3*s^4 - 5*s^3 + 4*s^2 - 4*s
→+ 2 : 1)]
```

```
sage: P.<x,y,z> = ProjectiveSpace(QQ, 2)
sage: f = DynamicalSystem_projective([x^2 - 21/16*z^2, y^2 - 2*z^2, z^2])
sage: f.periodic_points(2, False) #_
→needs sage.rings.function_field
[(-5/4 : -1 : 1), (-5/4 : 2 : 1), (-3/4 : -1 : 1),
 (-3/4 : 2 : 1), (0 : 1 : 0), (1/4 : -1 : 1), (1/4 : 2 : 1),
 (1 : 0 : 0), (1 : 1 : 0), (7/4 : -1 : 1), (7/4 : 2 : 1)]
```

```
sage: P.<x,y,z> = ProjectiveSpace(QQ, 2)
sage: f = DynamicalSystem_projective([x^2 - 21/16*z^2, y^2 - 2*z^2, z^2])
sage: f.periodic_points(2) #_
→needs sage.rings.function_field
[(-5/4 : -1 : 1), (-5/4 : 2 : 1), (1/4 : -1 : 1), (1/4 : 2 : 1)]
```

```
sage: set_verbose(None)
sage: P.<x,y> = ProjectiveSpace(ZZ, 1)
sage: f = DynamicalSystem_projective([x^2 + y^2, y^2])
sage: f.periodic_points(2, R=QQbar, minimal=False) #_
→needs sage.rings.number_field
[(-0.500000000000000? - 1.322875655532296?*I : 1),
 (-0.500000000000000? + 1.322875655532296?*I : 1),
 (0.500000000000000? - 0.866025403784439?*I : 1),
 (0.500000000000000? + 0.866025403784439?*I : 1),
 (1 : 0)]
```

```
sage: P.<x,y,z> = ProjectiveSpace(QQ, 2)
sage: f = DynamicalSystem_projective([x^2 - 3/4*z^2, y^2 - 3/4*z^2, z^2])
sage: f.periodic_points(2, formal=True) #_
→needs sage.rings.function_field
[(-1/2 : -1/2 : 1), (-1/2 : 3/2 : 1), (3/2 : -1/2 : 1)]
```

```
sage: P.<x,y> = ProjectiveSpace(GF(307), 1)
sage: f = DynamicalSystem_projective([x^10 + y^10, y^10])
sage: f.periodic_points(16, minimal=True, algorithm='cyclegraph') #_
→needs sage.graphs
[(69 : 1), (185 : 1), (120 : 1), (136 : 1), (97 : 1), (183 : 1),
```

(continues on next page)

(continued from previous page)

```
(170 : 1), (105 : 1), (274 : 1), (275 : 1), (154 : 1), (156 : 1),
(87 : 1), (95 : 1), (161 : 1), (128 : 1)]
```

```
sage: # needs sage.rings.finite_rings
sage: P.<x,y> = ProjectiveSpace(GF(13^2, 't'), 1)
sage: f = DynamicalSystem_projective([x^3 + 3*y^3, x^2*y])
sage: f.periodic_points(30, minimal=True, algorithm='cyclegraph') #_
˓needs sage.graphs
[(t + 3 : 1), (6*t + 6 : 1), (7*t + 1 : 1), (2*t + 8 : 1),
(3*t + 4 : 1), (10*t + 12 : 1), (8*t + 10 : 1), (5*t + 11 : 1),
(7*t + 4 : 1), (4*t + 8 : 1), (9*t + 1 : 1), (2*t + 2 : 1),
(11*t + 9 : 1), (5*t + 7 : 1), (t + 10 : 1), (12*t + 4 : 1),
(7*t + 12 : 1), (6*t + 8 : 1), (11*t + 10 : 1), (10*t + 7 : 1),
(3*t + 9 : 1), (5*t + 5 : 1), (8*t + 3 : 1), (6*t + 11 : 1),
(9*t + 12 : 1), (4*t + 10 : 1), (11*t + 4 : 1), (2*t + 7 : 1),
(8*t + 12 : 1), (12*t + 11 : 1)]
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem_projective([3*x^2 + 5*y^2, y^2])
sage: f.periodic_points(2, R=GF(3), minimal=False) #_
˓needs sage.rings.function_field
[(2 : 1)]
sage: f.periodic_points(2, R=GF(7)) #_
˓needs sage.rings.function_field
[]
```

```
sage: P.<x,y,z> = ProjectiveSpace(QQ, 2)
sage: f = DynamicalSystem_projective([x^2, x*y, z^2])
sage: f.periodic_points(1) #_
˓needs sage.rings.function_field
Traceback (most recent call last):
...
TypeError: use return_scheme=True
```

```
sage: # needs sage.rings.number_field
sage: R.<x> = QQ[]
sage: K.<u> = NumberField(x^2 - x + 3)
sage: P.<x,y,z> = ProjectiveSpace(K, 2)
sage: X = P.subscheme(2*x - y)
sage: f = DynamicalSystem_projective([x^2 - y^2, 2*(x^2 - y^2), y^2 - z^2],
domain=X)
sage: f.periodic_points(2) #_
˓needs sage.rings.function_field
[(-1/5*u - 1/5 : -2/5*u - 2/5 : 1), (1/5*u - 2/5 : 2/5*u - 4/5 : 1)]
```

```
sage: P.<x,y,z> = ProjectiveSpace(QQ, 2)
sage: f = DynamicalSystem_projective([x^2 - y^2, x^2 - z^2, y^2 - z^2])
sage: f.periodic_points(1) #_
˓needs sage.rings.function_field
[(-1 : 0 : 1)]
sage: f.periodic_points(1, return_scheme=True)
Closed subscheme of Projective Space of dimension 2 over Rational Field
defined by:
-x^3 + x^2*y - y^3 + x*z^2,
-x*y^2 + x^2*z - y^2*z + x*z^2,
```

(continues on next page)

(continued from previous page)

```
-y^3 + x^2*z + y*z^2 - z^3
```

```
sage: P.<x,y>=ProjectiveSpace(GF(3), 1)
sage: f = DynamicalSystem_projective([x^2 - 2*y^2, y^2])
sage: f.periodic_points(2, R=GF(3^2,'t'))
# needs sage.rings.finite_rings
[(t + 2 : 1), (2*t : 1)]
```

```
sage: S.<c> = QQ[]
sage: R.<x,y> = PolynomialRing(S, 2)
sage: P = ProjectiveSpace(R)
sage: f = DynamicalSystem_projective([x^2 + c*y^2, y^2])
sage: f.periodic_points(2, return_scheme=True)
# needs sage.rings.function_field
Closed subscheme of Projective Space of dimension 1 over Univariate
Polynomial Ring in c over Rational Field defined by:
x^2 + x*y + (c + 1)*y^2
```

```
sage: P.<x,y,z> = ProjectiveSpace(ZZ, 2)
sage: f = DynamicalSystem([x^2 - 2*y^2, y^2, z^2])
sage: X = f.periodic_points(2, minimal=False, formal=True, # long time
...: return_scheme=True)
sage: len(X.defining_polynomials())
# long time
19
```

possible_periods(kwds)**

Return the set of possible periods for rational periodic points of this dynamical system.

Must be defined over **Z** or **Q**.

ALGORITHM:

Calls `self.possible_periods()` modulo all primes of good reduction in range `prime_bound`. Return the intersection of those lists.

INPUT: keyword arguments:

- `prime_bound` – (default: [1, 20]) a list or tuple of two positive integers or an integer for the upper bound
- `bad_primes` – (optional) a list or tuple of integer primes, the primes of bad reduction
- `ncpus` – (default: all cpus) number of cpus to use in parallel

OUTPUT: list of positive integers

EXAMPLES:

```
sage: P.<x,y> = ProjectiveSpace(QQ,1)
sage: f = DynamicalSystem_projective([x^2 - 29/16*y^2, y^2])
sage: f.possible_periods(ncpus=1)
# needs sage.rings.function_field
[1, 3]
```

```
sage: PS.<x,y> = ProjectiveSpace(1,QQ)
sage: f = DynamicalSystem_projective([5*x^3 - 53*x*y^2 + 24*y^3, 24*y^3])
sage: f.possible_periods(prime_bound=[1,5])
# needs sage.rings.function_field
```

(continues on next page)

(continued from previous page)

```
Traceback (most recent call last):
...
ValueError: no primes of good reduction in that range
sage: f.possible_periods(prime_bound=[1,10]) #_
˓needs sage.rings.function_field
[1, 4, 12]
sage: f.possible_periods(prime_bound=[1,20]) #_
˓needs sage.rings.function_field
[1, 4]
```

```
sage: P.<x,y,z> = ProjectiveSpace(ZZ,2)
sage: f = DynamicalSystem_projective([2*x^3 - 50*x*z^2 + 24*z^3,
....:                                     5*y^3 - 53*y*z^2 + 24*z^3, 24*z^3])
sage: f.possible_periods(prime_bound=10) #_
˓needs sage.rings.function_field
[1, 2, 6, 20, 42, 60, 140, 420]
sage: f.possible_periods(prime_bound=20) # long time
[1, 20]
```

postcritical_set (check=True)

Return the postcritical set of this dynamical system.

Raises an error if this dynamical system is not postcritically finite.

The postcritical set is union of points which are in the forward orbits of the critical points. In other words, the set of points Q such that $f^n(P) = Q$ for some positive integer n and critical point P , where f is this map.

Note that the orbit of all critical points is found, even if the critical points are defined in an extension of the base ring of this dynamical system. We extend to the field defined by `f.field_of_definition_critical()`, where `f` is this map.

INPUT:

- `check` – boolean (default: `True`); whether to check if this dynamical system is postcritically finite or not

OUTPUT: the set of postcritical points

EXAMPLES:

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem([x^3 - 3/2*x*y^2, y^3])
sage: f.postcritical_set() #_
˓needs sage.rings.number_field
[(1/2*a : 1), (-1/2*a : 1), (1 : 0)]
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem([3*x^3 - 9/2*x^2*y+y^3, y^3])
sage: f.postcritical_set(check=False) #_
˓needs sage.rings.number_field
[(1 : 1), (-1/2 : 1), (1 : 0)]
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem([-4*y^2, 9*x^2 - 12*x*y])
sage: f.postcritical_set() #_
˓needs sage.rings.number_field
[(1 : 1), (4/3 : 1), (1 : 0), (0 : 1)]
```

```
sage: # needs sage.rings.number_field
sage: K.<v> = QuadraticField(2)
sage: P.<x,y> = ProjectiveSpace(K, 1)
sage: f = DynamicalSystem([x^2 + (-2)*y^2, y^2])
sage: m = matrix(K, 2, 2, [v, 1, 0, 1])
sage: g = f.conjugate(m)
sage: g.postcritical_set()
[(-3/2*a : 1), (1/2*a : 1), (1 : 0)]
```

```
sage: # needs sage.rings.finite_rings
sage: F.<z> = FiniteField(9)
sage: P.<x,y> = ProjectiveSpace(F, 1)
sage: f = DynamicalSystem([x^2 + (-2)*y^2, y^2])
sage: m = matrix(F, 2, 2, [z, 1, 0, 1])
sage: g = f.conjugate(m)
sage: g.postcritical_set()
[(1 : 0), (0 : 1), (a + 2 : 1)]
```

`preperiodic_points(m, n, **kwds)`

Compute the preperiodic points of period m, n of this dynamical system defined over the ring R or the base ring of the map.

This is done by finding the rational points on the variety defining the points of period m, n .

For rational maps, where there are potentially infinitely many periodic points of a given period, you must use the `return_scheme` option. Note that this scheme will include the indeterminacy locus.

INPUT:

- n – positive integer; the period
- m – nonnegative integer; the preperiod

kwds:

- `minimal` – boolean (default: `True`); `True` specifies to find only the preperiodic points of minimal period m, n and `False` specifies to find all preperiodic points of period m, n
- `formal` – boolean (default: `False`); `True` specifies to find the formal periodic points only. The formal periodic points are the points in the support of the dynatomic cycle.
- R – (default: the base ring of the dynamical system) a commutative ring over which to find the preperiodic points
- `return_scheme` – boolean (default: `False`); return a subscheme of the ambient space that defines the m, n th preperiodic points

OUTPUT:

A list of preperiodic points of this map or the subscheme defining the preperiodic points.

EXAMPLES:

```
sage: P.<x,y> = ProjectiveSpace(QQbar, 1)
# needs sage.rings.number_field
sage: f = DynamicalSystem_projective([x^2 - y^2, y^2])
# needs sage.rings.number_field
sage: f.preperiodic_points(0, 1)
# needs sage.rings.number_field
[(-0.618033988749895? : 1), (1 : 0), (1.618033988749895? : 1)]
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem_projective([x^2 - 29/16*y^2, y^2])
sage: f.preperiodic_points(1, 3) #_
    ↵needs sage.rings.function_field
[(-5/4 : 1), (1/4 : 1), (7/4 : 1)]
```

```
sage: P.<x,y,z> = ProjectiveSpace(QQ, 2)
sage: f = DynamicalSystem_projective([x^2 - 3/4*y^2, y^2, z^2])
sage: f.preperiodic_points(0, 2, formal=True) #_
    ↵needs sage.rings.function_field
[(-1/2 : 1 : 0), (-1/2 : 1 : 1)]
```

```
sage: # needs sage.rings.number_field
sage: P.<x,y> = ProjectiveSpace(QQbar, 1)
sage: f = DynamicalSystem_projective([x^2 - x*y + 2*y^2, x^2 - y^2])
sage: f.preperiodic_points(1, 2, minimal=False) #_
    ↵needs sage.rings.function_field
[(-3.133185666641252? : 1),
 (-1 : 1),
 (-0.3478103847799310? - 1.028852254136693?*I : 1),
 (-0.3478103847799310? + 1.028852254136693?*I : 1),
 (0.8165928333206258? - 0.6710067557437100?*I : 1),
 (0.8165928333206258? + 0.6710067557437100?*I : 1),
 (1 : 0),
 (1 : 1),
 (1.695620769559862? : 1),
 (3 : 1)]
```

```
sage: # needs sage.rings.number_field
sage: R.<w> = QQ[]
sage: K.<s> = NumberField(w^6 - 3*w^5 + 5*w^4 - 5*w^3 + 5*w^2 - 3*w + 1)
sage: P.<x,y,z> = ProjectiveSpace(K, 2)
sage: f = DynamicalSystem_projective([x^2 + z^2, y^2 + x^2, z^2 + y^2])
sage: sorted(f.preperiodic_points(0, 1), key=str) #_
    ↵needs sage.rings.function_field
[(-2*s^5 + 4*s^4 - 5*s^3 + 3*s^2 - 4*s : -2*s^5 + 5*s^4 - 7*s^3 + 6*s^2 - 7*s
+ 3 : 1),
 (-s^5 + 3*s^4 - 4*s^3 + 4*s^2 - 4*s + 2 : -s^5 + 2*s^4 - 2*s^3 + s^2 - s : 1),
 (-s^5 + 3*s^4 - 5*s^3 + 4*s^2 - 3*s + 1 : s^5 - 2*s^4 + 3*s^3 - 3*s^2 + 4*s
- 1 : 1),
 (1 : 1 : 1),
 (2*s^5 - 6*s^4 + 9*s^3 - 8*s^2 + 7*s - 4 : 2*s^5 - 5*s^4 + 7*s^3 - 5*s^2 +
6*s - 2 : 1),
 (s^5 - 2*s^4 + 2*s^3 + s : s^5 - 3*s^4 + 4*s^3 - 3*s^2 + 2*s - 1 : 1),
 (s^5 - 2*s^4 + 3*s^3 - 3*s^2 + 3*s - 1 : -s^5 + 3*s^4 - 5*s^3 + 4*s^2 - 4*s
+ 2 : 1)]
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem_projective([x^2 + 1/4*y^2, y^2])
sage: f.preperiodic_points(1, 1, formal=True)
[(-1/2 : 1), (1 : 0)]
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem_projective([x^2 - 3/4*y^2, y^2])
sage: f.preperiodic_points(0, 2, formal=True) #_
    ↵continues on next page)
```

(continued from previous page)

```
→needs sage.libs.pari
[ (-1/2 : 1) ]
```

```
sage: # needs sage.rings.number_field
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: K.<v> = QuadraticField(5)
sage: phi = QQ.embeddings(K)[0]
sage: f = DynamicalSystem_projective([x^2 - y^2, y^2])
sage: f.preperiodic_points(1, 1, R=phi)
[(-1/2*v - 1/2 : 1), (1/2*v - 1/2 : 1)]
```

```
sage: P.<x,y,z> = ProjectiveSpace(QQ, 2)
sage: X = P.subscheme(2*x - y)
sage: f = DynamicalSystem_projective([x^2 - y^2, 2*(x^2 - y^2), y^2 - z^2],
....: domain=X)
sage: f.preperiodic_points(1, 1)
→needs sage.rings.function_field
[(-1/4 : -1/2 : 1), (1 : 2 : 1)] #_
```

```
sage: P.<x,y,z> = ProjectiveSpace(QQ, 2)
sage: f = DynamicalSystem_projective([x^2 - 3/4*y^2, z^2, y^2])
sage: f.preperiodic_points(1, 1)
→needs sage.rings.function_field
[(-3/2 : -1 : 1), (-3/2 : 1 : 1), (-1/2 : -1 : 1), (1/2 : -1 : 1),
(1/2 : 1 : 1), (3/2 : -1 : 1)] #_
```

```
sage: P.<x,y,z> = ProjectiveSpace(GF(5), 2)
sage: f = DynamicalSystem_projective([x^2, y^2, z^2])
sage: sorted(f.preperiodic_points(2, 1))
→needs sage.rings.function_field
[(0 : 2 : 1), (0 : 3 : 1), (1 : 2 : 1), (1 : 3 : 1), (2 : 0 : 1), (2 : 1 : 0),
(2 : 1 : 1), (2 : 2 : 1), (2 : 3 : 1), (2 : 4 : 1), (3 : 0 : 1), (3 : 1 : 0),
(3 : 1 : 1), (3 : 2 : 1), (3 : 3 : 1), (3 : 4 : 1), (4 : 2 : 1), (4 : 3 : 1)] #_
```

```
sage: P.<x,y,z> = ProjectiveSpace(GF(5), 2)
sage: f = DynamicalSystem_projective([x^2, x*y, z^2])
sage: f.preperiodic_points(2, 1, return_scheme=True, minimal=False)
Closed subscheme of
Projective Space of dimension 2 over Finite Field of size 5 defined by:
0,
x^8*z^4 - x^4*z^8,
x^7*y*z^4 - x^3*y*z^8
```

When the ring over which to find the preperiodic points is a number field, the ordering of the preperiodic points might depend on the architecture (32 or 64 bits):

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: R.<z> = QQ[]
sage: K.<v> = NumberField(z^4 - z^2 - 1)
→needs sage.rings.number_field
sage: f = DynamicalSystem_projective([x^2 - y^2, y^2])
sage: sorted(f.preperiodic_points(2, 1, R=K), key=str)
→needs sage.rings.number_field
[(-v : 1), (v : 1)] #_
```

```
sage: P.<x,y,z> = ProjectiveSpace(QQ, 2)
sage: f = DynamicalSystem_projective([x^2 - 3/4*y^2, y^2, z^2])
sage: f.preperiodic_points(0, 2, formal=True) #_
˓needs sage.rings.function_field
[(-1/2 : 1 : 0), (-1/2 : 1 : 1)]
```

```
sage: S.<c> = QQ[]
sage: R.<x,y> = PolynomialRing(S, 2)
sage: P = ProjectiveSpace(R)
sage: f = DynamicalSystem_projective([x^2 + c*y^2, y^2])
sage: f.preperiodic_points(1, 2, return_scheme=True) #_
˓needs sage.rings.function_field
Closed subscheme of Projective Space of dimension 1 over Univariate
Polynomial Ring in c over Rational Field defined by:
x^2 - x*y + (c + 1)*y^2
```

primes_of_bad_reduction(*check=True*)

Determine the primes of bad reduction for this dynamical system.

Must be defined over a number field.

If *check* is True, each prime is verified to be of bad reduction.

ALGORITHM:

p is a prime of bad reduction if and only if the defining polynomials of *self* have a common zero. Or stated another way, *p* is a prime of bad reduction if and only if the radical of the ideal defined by the defining polynomials of *self* is not (x_0, x_1, \dots, x_N) . This happens if and only if some power of each x_i is not in the ideal defined by the defining polynomials of *self*. This last condition is what is checked. The lcm of the coefficients of the monomials x_i in a Groebner basis is computed. This may return extra primes.

INPUT:

- *check* – boolean (default: True)

OUTPUT: list of primes

EXAMPLES:

```
sage: P.<x,y> = ProjectiveSpace(QQ,1)
sage: f = DynamicalSystem_projective([1/3*x^2 + 1/2*y^2, y^2])
sage: f.primes_of_bad_reduction() #_
˓needs sage.rings.function_field
[2, 3]
```

```
sage: P.<x,y,z,w> = ProjectiveSpace(QQ,3)
sage: f = DynamicalSystem_projective([12*x*z - 7*y^2, 31*x^2 - y^2,
....: 26*z^2, 3*w^2 - z*w])
sage: f.primes_of_bad_reduction() #_
˓needs sage.rings.function_field
[2, 3, 7, 13, 31]
```

A number field example:

```
sage: # needs sage.rings.number_field
sage: R.<z> = QQ[]
sage: K.<a> = NumberField(z^2 - 2)
sage: P.<x,y> = ProjectiveSpace(K,1)
sage: f = DynamicalSystem_projective([1/3*x^2+1/a*y^2, y^2])
```

(continues on next page)

(continued from previous page)

```
sage: f.primes_of_bad_reduction()
˓needs sage.rings.function_field
[Fractional ideal (a), Fractional ideal (3)] #_
```

This is an example where `check=False` returns extra primes:

```
sage: P.<x,y,z> = ProjectiveSpace(ZZ, 2)
sage: f = DynamicalSystem_projective([3*x*y^2 + 7*y^3 - 4*y^2*z + 5*z^3,
....:                                 -5*x^3 + x^2*y + y^3 + 2*x^2*z,
....:                                 -2*x^2*y + x*y^2 + y^3 - 4*y^2*z + x*z^2])
sage: f.primes_of_bad_reduction(False) #_
˓needs sage.rings.function_field
[2, 5, 37, 2239, 304432717]
sage: f.primes_of_bad_reduction() #_
˓needs sage.rings.function_field
[5, 37, 2239, 304432717]
```

`ramification_type` (*R=None, stable=True*)

Return the ramification type of endomorphisms of \mathbb{P}^1 .

Only branch points defined over the ring *R* contribute to the ramification type if specified, otherwise *R* is the ring of definition for `self`.

Note that branch points defined over *R* may not be geometric points if `stable` not set to `True`.

If *R* is specified, `stable` is ignored.

If `stable`, then this will return the ramification type over an extension which splits the Galois orbits of critical points.

INPUT:

- *R* – ring or morphism (optional)
- `split` – boolean (optional)

OUTPUT:

list of lists, each term being the list of ramification indices in the pre-images of one critical value

EXAMPLES:

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: F = DynamicalSystem_projective([x^4, y^4])
sage: F.ramification_type() #_
˓needs sage.rings.number_field
[[4], [4]]

sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: F = DynamicalSystem_projective([x^3, 4*y^3 - 3*x^2*y])
sage: F.ramification_type() #_
˓needs sage.rings.number_field
[[2], [2], [3]]

sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: F = DynamicalSystem_projective([(x + y)^4, 16*x*y*(x-y)^2])
sage: F.ramification_type() #_
˓needs sage.rings.number_field
[[2], [2, 2], [4]]
```

(continues on next page)

(continued from previous page)

```

sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: F = DynamicalSystem_projective([(x + y)*(x - y)^3, y^(2*x+y)^3])
sage: F.ramification_type() #_
˓needs sage.rings.number_field
[[3], [3], [3]]

sage: F = DynamicalSystem_projective([x^3 - 2*x*y^2 + 2*y^3, y^3])
sage: F.ramification_type() #_
˓needs sage.rings.number_field
[[2], [2], [3]]
sage: F.ramification_type(R=F.base_ring()) #_
˓needs sage.rings.function_field
[[2], [3]]

```

reduced_form(kwds)**

Return reduced form of this dynamical system.

The reduced form is the $SL(2, \mathbf{Z})$ equivalent morphism obtained by applying the binary form reduction algorithm from Stoll and Cremona [CS2003] to the homogeneous polynomial defining the periodic points (the dynatomic polynomial). The smallest period n with enough periodic points is used and without roots of too large multiplicity.

This should also minimize the size of the coefficients, but this is not always the case. By default the coefficient minimizing algorithm in [HS2018] is applied.

See `sage.rings.polynomial.multi_polynomial.reduced_form()` for the information on binary form reduction.

Implemented by Rebecca Lauren Miller as part of GSOC 2016. Minimal height added by Ben Hutz July 2018.

INPUT: keyword arguments:

- `prec` – integer (default: 300); desired precision
- `return_conjuagation` – boolean (default: `True`); return an element of $SL(2, \mathbf{Z})$
- `error_limit` – (default: 0.000001) a real number, sets the error tolerance
- `smallest_coeffs` – boolean (default: `True`); whether to find the model with smallest coefficients
- `dynatomic` – boolean (default: `True`); to use formal periodic points
- `start_n` – positive integer (default: 1); first period to try to find appropriate binary form
- `emb` – (optional) embedding of based field into \mathbb{C}
- `algorithm` – (optional) which algorithm to use to find all minimal models. Can be one of the following:
 - '`BM`' – Bruin-Molnar algorithm [BM2012]
 - '`HS`' – Hutz-Stoll algorithm [HS2018]
- `check_minimal` – boolean (default: `True`); whether to check if this map is a minimal model
- `smallest_coeffs` – boolean (default: `True`); whether to find the model with smallest coefficients

OUTPUT:

- a projective morphism
- a matrix

EXAMPLES:

```
sage: PS.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem_projective([x^3 + x*y^2, y^3])
sage: m = matrix(QQ, 2, 2, [-201221, -1, 1, 0])
sage: f = f.conjugate(m)
sage: f.reduced_form(prec=50, smallest_coeffs=False) # this needs 2 periodic
Traceback (most recent call last):
...
ValueError: accuracy of Newton's root not within tolerance(0.00006... > 1e-
˓→06), increase precision
sage: f.reduced_form(smallest_coeffs=False)
(
Dynamical System of Projective Space of dimension 1 over Rational Field
Defn: Defined on coordinates by sending (x : y) to (x^3 + x*y^2 : y^3)
,
[      0      -1]
[      1 201221]
)
```

```
sage: PS.<x,y> = ProjectiveSpace(ZZ, 1)
sage: f = DynamicalSystem_projective([x^2 + x*y, y^2]) # this needs 3˓→periodic
sage: m = matrix(QQ, 2, 2, [-221, -1, 1, 0])
sage: f = f.conjugate(m)
sage: f.reduced_form(prec=200, smallest_coeffs=False)
(
Dynamical System of Projective Space of dimension 1 over Integer Ring
Defn: Defined on coordinates by sending (x : y) to (-x^2 + x*y - y^2 : -y^2)
,
[  0  -1]
[  1 220]
)
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem_projective([x^3, y^3])
sage: f.reduced_form(smallest_coeffs=False)
(
Dynamical System of Projective Space of dimension 1 over Rational Field
Defn: Defined on coordinates by sending (x : y) to (x^3 : y^3)
,
[1 0]
[0 1]
)
```

```
sage: PS.<X,Y> = ProjectiveSpace(QQ,1)
sage: f = DynamicalSystem_projective([7365*X^4 + 12564*X^3*Y + 8046*X^2*Y^2
....:                               + 2292*X*Y^3 + 245*Y^4,
....:                               -12329*X^4 - 21012*X^3*Y - 13446*X^2*Y^2
....:                               - 3828*X*Y^3 - 409*Y^4])
sage: f.reduced_form(prec=30, smallest_coeffs=False)
Traceback (most recent call last):
...
ValueError: accuracy of Newton's root not within tolerance(0.00008... > 1e-
˓→06), increase precision
```

(continues on next page)

(continued from previous page)

```
sage: f.reduced_form(smallest_coeffs=False)
(
Dynamical System of Projective Space of dimension 1 over Rational Field
Defn: Defined on coordinates by sending (X : Y) to
      (-7*X^4 - 12*X^3*Y - 42*X^2*Y^2 - 12*X*Y^3 - 7*Y^4
       : -X^4 - 4*X^3*Y - 6*X^2*Y^2 - 4*X*Y^3 - Y^4),
[ -1   2]
[  2  -5]
)
```

```
sage: # needs sage.rings.real_mpfr sage.symbolic
sage: P.<x,y> = ProjectiveSpace(RR, 1)
sage: f = DynamicalSystem_projective([x^4, RR(sqrt(2))*y^4])
sage: m = matrix(RR, 2, 2, [1,12,0,1])
sage: f = f.conjugate(m)
sage: g, m = f.reduced_form(smallest_coeffs=False); m
[  1 -12]
[  0   1]
```

```
sage: # needs sage.rings.real_mpfr sage.symbolic
sage: P.<x,y> = ProjectiveSpace(CC, 1)
sage: f = DynamicalSystem_projective([x^4, CC(sqrt(-2))*y^4])
sage: m = matrix(CC, 2, 2, [1,12,0,1])
sage: f = f.conjugate(m)
sage: g, m = f.reduced_form(smallest_coeffs=False); m
[  1 -12]
[  0   1]
```

```
sage: # needs sage.rings.number_field
sage: K.<w> = QuadraticField(2)
sage: P.<x,y> = ProjectiveSpace(K, 1)
sage: f = DynamicalSystem_projective([x^3, w*y^3])
sage: m = matrix(K, 2, 2, [1,12,0,1])
sage: f = f.conjugate(m)
sage: f.reduced_form(smallest_coeffs=False)
(
Dynamical System of Projective Space of dimension 1 over Number Field in w
with defining polynomial x^2 - 2 with w = 1.414213562373095?
Defn: Defined on coordinates by sending (x : y) to (x^3 : w*y^3) ,
[  1 -12]
[  0   1]
)
```

```
sage: # needs sage.rings.number_field
sage: R.<x> = QQ[]
sage: K.<w> = NumberField(x^5 + x - 3,
....:                      embedding=(x^5 + x - 3).roots(ring=CC)[0][0])
sage: P.<x,y> = ProjectiveSpace(K, 1)
sage: f = DynamicalSystem_projective([12*x^3, 2334*w*y^3])
sage: m = matrix(K, 2, 2, [-12,1,1,0])
sage: f = f.conjugate(m)
sage: f.reduced_form(smallest_coeffs=False)
(
```

(continues on next page)

(continued from previous page)

```
Dynamical System of Projective Space of dimension 1 over Number Field in w
with defining polynomial  $x^5 + x - 3$  with  $w = 1.132997565885066?$ 
Defn: Defined on coordinates by sending  $(x : y)$  to
 $(12*x^3 : (2334*w)*y^3) ,$ 

[ 0 -1]
[ 1 -12]
)
```

```
sage: P.<x,y> = QQ[]
sage: f = DynamicalSystem([-4*y^2, 9*x^2 - 12*x*y])
sage: f.reduced_form()
(
Dynamical System of Projective Space of dimension 1 over Rational Field
Defn: Defined on coordinates by sending  $(x : y)$  to
 $(2*x^2 - 2*y^2 : -x^2 - 2*y^2)$ 
,
[ 2 -2]
[ 3  0]
)
```

```
sage: P.<x,y> = QQ[]
sage: f = DynamicalSystem([-2*x^3 - 9*x^2*y - 12*x*y^2 - 6*y^3 , y^3])
sage: f.reduced_form()
(
Dynamical System of Projective Space of dimension 1 over Rational Field
Defn: Defined on coordinates by sending  $(x : y)$  to
 $(x^3 + 3*x^2*y : 3*x*y^2 + y^3)$ 
,
[-1 -2]
[ 1  1]
)
```

```
sage: P.<x,y> = QQ[]
sage: f = DynamicalSystem([4*x^2 - 7*y^2, 4*y^2])
sage: f.reduced_form(start_n=2, dynatomic=False) #long time
(
Dynamical System of Projective Space of dimension 1 over Rational Field
Defn: Defined on coordinates by sending  $(x : y)$  to
 $(x^2 - x*y - y^2 : y^2)$ 
,
[ 2 -1]
[ 0  2]
)
```

```
sage: P.<x,y> = QQ[]
sage: f = DynamicalSystem([4*x^2 + y^2, 4*y^2])
sage: f.reduced_form() # long time
(
Dynamical System of Projective Space of dimension 1 over Rational Field
Defn: Defined on coordinates by sending  $(x : y)$  to
 $(x^2 - x*y + y^2 : y^2)$ 
```

(continues on next page)

(continued from previous page)

```

,
[ 2 -1]
[ 0  2]
)
```

resultant (*normalize=False*)

Compute the resultant of the defining polynomials of this dynamical system.

If *normalize* is True, then first normalize the coordinate functions with *normalize_coordinates()*.

INPUT:

- *normalize* – boolean (default: False)

OUTPUT: an element of the base ring of this map

EXAMPLES:

```
sage: P.<x,y> = ProjectiveSpace(QQ,1)
sage: f = DynamicalSystem_projective([x^2 + y^2, 6*y^2])
sage: f.resultant() #_
˓needs sage.libs.pari
36
```

```
sage: R.<t> = PolynomialRing(GF(17))
sage: P.<x,y> = ProjectiveSpace(R,1)
sage: f = DynamicalSystem_projective([t*x^2 + t*y^2, 6*y^2])
sage: f.resultant() #_
˓needs sage.libs.pari
2*t^2
```

```
sage: R.<t> = PolynomialRing(GF(17))
sage: P.<x,y,z> = ProjectiveSpace(R,2)
sage: f = DynamicalSystem_projective([t*x^2 + t*y^2, 6*y^2, 2*t*z^2])
sage: f.resultant()
13*t^8
```

```
sage: P.<x,y,z> = ProjectiveSpace(QQ,2)
sage: F = DynamicalSystem_projective([x^2 + y^2, 6*y^2, 10*x*z + z^2 + y^2])
sage: F.resultant()
1296
```

```
sage: # needs sage.rings.number_field
sage: R.<t> = PolynomialRing(QQ)
sage: s = (t^3 + t + 1).roots(QQbar)[0][0]
sage: P.<x,y> = ProjectiveSpace(QQbar, 1)
sage: f = DynamicalSystem_projective([s*x^3 - 13*y^3, y^3 - 15*y^3])
sage: f.resultant()
871.6925062959149?
```

sigma_invariants (*n, formal=False, embedding=None, type='point', return_polynomial=False, chow=False, deform=False, check=True*)

Compute the values of the elementary symmetric polynomials evaluated on the *n* multiplier spectra of this dynamical system.

The sigma invariants are the symmetric polynomials evaluated on the characteristic polynomial of the multipliers. See [Hutz2019] for the full definition. Specifically, this function returns either the following polynomial or its coefficients (with signs appropriately adjusted):

$$\prod_{P \text{ period } n} (w - c(P, t)),$$

where $c(P, t)$ is the characteristic polynomial (variable t) of the multiplier at P . Note that in dimension 1, only the coefficients of the constant term is returned.

The invariants can be computed for points of period n or points of formal period n . The base ring should be a number field, number field order, or a finite field or a polynomial ring or function field over a number field, number field order, or finite field.

The parameter `type` determines if the sigma are computed from the multipliers calculated at one per cycle (with multiplicity) or one per point (with multiplicity). Only implemented for dimension 1. Note that in the `cycle` case, a map with a cycle which collapses into multiple smaller cycles, this is still considered one cycle. In other words, if a 4-cycle collapses into a 2-cycle with multiplicity 2, there is only one multiplier used for the doubled 2-cycle when computing $n=4$.

ALGORITHM:

In dimension 1, we use the Poisson product of the resultant of two polynomials:

$$\text{res}(f, g) = \prod_{f(a)=0} g(a).$$

In higher dimensions, we use elimination theory (Groebner bases) to compute the equivalent of the Poisson product. Letting f be the polynomial defining the periodic or formal periodic points and g the polynomial $w - F$ for an auxilarly variable w and F the characteristic polynomial of the Jacobian matrix of f . Note that if f is a rational function, we clear denominators for g .

To calculate the full polynomial defining the sigma invariants, we follow the algorithm outlined in section 4 of [Hutz2019]. There are 4 cases:

- multipliers and n periodic points all distinct – in this case, we can use Proposition 4.1 of [Hutz2019] to compute the sigma invariants
- n – periodic points are all distinct, multipliers are repeated; here we can use Proposition 4.2 of [Hutz2019] to compute the sigma invariants. This corresponds to `chow=True`.
- n – periodic points are repeated, multipliers are all distinct; to deal with this case, we deform the map by a formal parameter k . The deformation separates the n periodic points, making them distinct, and we can recover the n periodic points of the original map by specializing k to 0. This corresponds to `deform=True`.
- n – periodic points are repeated, multipliers are repeated; here we can use both cases 2 and 3 together. This corresponds to `deform=True` and `chow=True`.

As we do not want to check which case we are in beforehand, we throw a `ValueError` if the computed polynomial does not have the correct degree.

INPUT:

- n – positive integer, the period
- `formal` – boolean (default: `False`); `True` specifies to find the values of the elementary symmetric polynomials corresponding to the formal n multiplier spectra and `False` specifies to instead find the values corresponding to the n multiplier spectra, which includes the multipliers of all periodic points of period n

- `embedding` – (default: `None`) must be `None`, passing an embedding is no longer supported, see Issue #32205
- `type` – (default: `'point'`) string; either `'point'` or `'cycle'` depending on whether you compute with one multiplier per point or one per cycle. Not implemented for dimension greater than 1.
- `return_polynomial` – boolean (default: `False`); `True` specifies returning the polynomial which generates the sigma invariants, see [Hutz2019] for the full definition. The polynomial is always a multivariate polynomial with variables `w` and `t`.
- `chow` – boolean (default: `False`); `True` specifies using the Chow algorithm from [Hutz2019] to compute the sigma invariants. While slower, the Chow algorithm does not lose information about multiplicities of the multipliers. In order to accurately compute the sigma polynomial when there is a repeated multiplier, `chow` must be `True`.
- `deform` – boolean (default: `False`); `True` specifies first deforming the map so that all periodic points are distinct and then calculating the sigma invariants. In order to accurately calculate the sigma polynomial when there is a periodic point with multiplicity, `deform` must be `True`.
- `check` – boolean (default: `True`); when `True` the degree of the sigma polynomial is checked against the expected degree. This is done as the sigma polynomial may drop degree if multiplicities of periodic points or multipliers are not correctly accounted for using `chow` or `deform`.

Warning

Setting `check` to `False` can lead to mathematically incorrect answers.

OUTPUT: list of elements in the base ring, unless `return_polynomial` is `True`, in which case a polynomial in `w` and `t` is returned. The variable `t` is the variable of the characteristic polynomials of the multipliers.

If this map is defined over \mathbb{P}^N , where $N > 1$, then the list is the coefficients of w and t , in lexicographical order with $w > t$.

EXAMPLES:

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem_projective([x^2 + x*y + y^2, y^2 + x*y])
sage: f.sigma_invariants(1)                                              #
→needs sage.rings.number_field
[3, 3, 1]
```

If `return_polynomial` is `True`, then following [Hutz2019] we return a two variable polynomial in w and t :

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem_projective([x^2 + 2*y^2, y^2])
sage: poly = f.sigma_invariants(1, return_polynomial=True); poly
w^3 - 3*w^2*t + 2*w^2 + 3*w*t^2 - 4*w*t + 8*w - t^3 + 2*t^2 - 8*t
```

From the full polynomial, we can easily recover the one variable polynomial whose coefficients are symmetric functions in the multipliers, up to sign:

```
sage: w, t = poly.variables()
sage: poly.specialization({w:0}).monic()
t^3 - 2*t^2 + 8*t
sage: f.sigma_invariants(1)                                              #
→needs sage.rings.number_field
[2, 8, 0]
```

For dynamical systems on \mathbb{P}^N , where $N > 1$, the full polynomial is needed to distinguish the conjugacy class. We can, however, still return a list in this case:

```
sage: P.<x,y,z> = ProjectiveSpace(QQ, 2)
sage: f = DynamicalSystem_projective([x^2, z^2, y^2])
sage: f.sigma_invariants(1, chow=True)
[1, 7, -6, -12, 21, -36, -60, 72, 48, 35, -90, -120, 352, 96, -288, -64, 35,
-120, -120, 688, -96, -1056, 320, 384, 0, 21, -90, -60, 672, -384, -1440, -1344,
768, -768, 0, 0, 7, -36, -12, 328, -336, -864, 1472, 384, -1536, 512, 0, 0, 0,
0,
1, -6, 0, 64, -96, -192, 512, 0, -768, 512, 0, 0, 0, 0]
```

When calculating the sigma invariants for \mathbb{P}^N , with $N > 1$, the default algorithm loses information about multiplicities. Note that the following call to sigma invariants returns a degree 6 polynomial in w :

```
sage: P.<x,y,z> = ProjectiveSpace(QQ, 2)
sage: f = DynamicalSystem_projective([x^2, y^2, z^2])
sage: f.sigma_invariants(1, return_polynomial=True, check=False)
w^6 - 6*w^5*t^2 + 8*w^5*t - 4*w^5 + 15*w^4*t^4 - 40*w^4*t^3 + 40*w^4*t^2 -
16*w^4*t - 20*w^3*t^6 + 80*w^3*t^5 - 120*w^3*t^4 + 80*w^3*t^3 - 16*w^3*t^2 +
15*w^2*t^8 - 80*w^2*t^7 + 160*w^2*t^6 - 144*w^2*t^5 + 48*w^2*t^4 - 6*w*t^10 +
40*w*t^9 - 100*w*t^8 + 112*w*t^7 - 48*w*t^6 + t^12 - 8*t^11 + 24*t^10 -
32*t^9 + 16*t^8
```

Setting `chow` to `True`, while much slower, accounts correctly for multiplicities. Note that the following returns a degree 7 polynomial in w :

```
sage: f.sigma_invariants(1, return_polynomial=True, chow=True)
w^7 - 7*w^6*t^2 + 10*w^6*t - 4*w^6 + 21*w^5*t^4 - 60*w^5*t^3 + 60*w^5*t^2 -
24*w^5*t - 35*w^4*t^6 + 150*w^4*t^5 - 240*w^4*t^4 + 176*w^4*t^3 - 48*w^4*t^2 +
35*w^3*t^8 - 200*w^3*t^7 + 440*w^3*t^6 - 464*w^3*t^5 + 224*w^3*t^4 -
32*w^3*t^3 - 21*w^2*t^10 + 150*w^2*t^9 - 420*w^2*t^8 + 576*w^2*t^7 -
384*w^2*t^6 + 96*w^2*t^5 + 7*w*t^12 - 60*w*t^11 + 204*w*t^10 - 344*w*t^9 +
288*w*t^8 - 96*w*t^7 - t^14 + 10*t^13 - 40*t^12 + 80*t^11 - 80*t^10 + 32*t^9
```

```
sage: # needs sage.rings.number_field
sage: set_verbose(None)
sage: z = QQ['z'].0
sage: K = NumberField(z^4 - 4*z^2 + 1, 'z')
sage: P.<x,y> = ProjectiveSpace(K, 1)
sage: f = DynamicalSystem_projective([x^2 - 5/4*y^2, y^2])
sage: f.sigma_invariants(2, formal=False, type='cycle')
[13, 11, -25, 0]
sage: f.sigma_invariants(2, formal=False, type='point')
[12, -2, -36, 25, 0]
```

check that infinity as part of a longer cycle is handled correctly:

```
sage: # needs sage.rings.number_field
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem_projective([y^2, x^2])
sage: f.sigma_invariants(2, type='cycle')
[12, 48, 64, 0]
sage: f.sigma_invariants(2, type='point')
[12, 48, 64, 0, 0]
sage: f.sigma_invariants(2, type='cycle', formal=True)
```

(continues on next page)

(continued from previous page)

```
[0]
sage: f.sigma_invariants(2, type='point', formal=True)
[0, 0]
```

```
sage: # needs sage.rings.number_field
sage: K.<w> = QuadraticField(3)
sage: P.<x,y> = ProjectiveSpace(K, 1)
sage: f = DynamicalSystem_projective([x^2 - w*y^2, (1-w)*x*y])
sage: f.sigma_invariants(2, formal=False, type='cycle')
[6*w + 21, 78*w + 159, 210*w + 367, 90*w + 156]
sage: f.sigma_invariants(2, formal=False, type='point')
[6*w + 24, 96*w + 222, 444*w + 844, 720*w + 1257, 270*w + 468]
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem_projective([512*x^5 - 378128*x^4*y + 76594292*x^3*y^
    ↪2
    ....:      - 4570550136*x^2*y^3 - 2630045017*x*y^4 + 28193217129*y^5, ↪
    ↪512*y^5])
sage: f.sigma_invariants(1) #_
    ↪needs sage.rings.number_field
[19575526074450617/1048576, -9078122048145044298567432325/2147483648,
 -2622661114909099878224381377917540931367/1099511627776,
 -2622661107937102104196133701280271632423/549755813888,
 338523204830161116503153209450763500631714178825448006778305/
 ↪72057594037927936, 0]
```

```
sage: P.<x,y,z> = ProjectiveSpace(GF(5), 2)
sage: f = DynamicalSystem([x^2, y^2, z^2])
sage: f.sigma_invariants(1, chow=True, return_polynomial=True)
w^7 - 2*w^6*t^2 + w^6 + w^5*t^4 + w^5*t + w^4*t^3 + 2*w^4*t^2 + w^3*t^5 -
w^3*t^4 - 2*w^3*t^3 - w^2*t^10 + w^2*t^7 + w^2*t^6 + w^2*t^5 + 2*w*t^12 -
w*t^10 + w*t^9 - 2*w*t^8 - w*t^7 - t^14 + 2*t^9
```

```
sage: # needs sage.rings.number_field
sage: R.<c> = QQ[]
sage: Pc.<x,y> = ProjectiveSpace(R, 1)
sage: f = DynamicalSystem_projective([x^2 + c*y^2, y^2])
sage: f.sigma_invariants(1)
[2, 4*c, 0]
sage: f.sigma_invariants(2, formal=True, type='point')
[8*c + 8, 16*c^2 + 32*c + 16]
sage: f.sigma_invariants(2, formal=True, type='cycle')
[4*c + 4]
```

```
sage: R.<c> = QQ[]
sage: P.<x,y> = ProjectiveSpace(R, 1)
sage: f = DynamicalSystem([x^2 + c*y^2, y^2])
sage: f.sigma_invariants(1, return_polynomial=True)
w^3 + (-3)*w^2*t + 2*w^2 + 3*w*t^2 + (-4)*w*t + 4*c*w - t^3 + 2*t^2 + (-4*c)*t
sage: f.sigma_invariants(2, chow=True, formal=True, #_
    ↪needs sage.libs.pari
....:      return_polynomial=True)
w^2 + (-2)*w*t + (8*c + 8)*w + t^2 + (-8*c - 8)*t + 16*c^2 + 32*c + 16
```

```
sage: R.<c,d> = QQ[]
sage: P.<x,y,z> = ProjectiveSpace(R, 2)
sage: f = DynamicalSystem([x^2 + c*z^2, y^2 + d*z^2, z^2])
sage: len(dict(f.sigma_invariants(1, return_polynomial=True)))
51
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem([x^2 + 3*y^2, x*y])
sage: f.sigma_invariants(1, deform=True, return_polynomial=True) #_
→needs sage.rings.function_field
w^3 - 3*w^2*t + 3*w^2 + 3*w*t^2 - 6*w*t + 3*w - t^3 + 3*t^2 - 3*t + 1
```

doubled fixed point:

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem_projective([x^2 - 3/4*y^2, y^2])
sage: f.sigma_invariants(2, formal=True) #_
→needs sage.rings.number_field
[2, 1]
```

doubled 2 cycle:

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem_projective([x^2 - 5/4*y^2, y^2])
sage: f.sigma_invariants(4, formal=False, type='cycle') #_
→needs sage.rings.number_field
[170, 5195, 172700, 968615, 1439066, 638125, 0]
```

class sage.dynamics.arithmetic_dynamics.projective_ds.**DynamicalSystem_projective_field**(polys
do-
main)

Bases: *DynamicalSystem_projective*, *SchemeMorphism_polynomial_projective_space_field*

all_periodic_points (**kwds)

Determine the set of rational periodic points for this dynamical system.

The map must be defined over \mathbb{Q} and be an endomorphism of projective space. If the map is a polynomial endomorphism of \mathbb{P}^1 , i.e. has a totally ramified fixed point, then the base ring can be an absolute number field. This is done by passing to the Weil restriction.

The default parameter values are typically good choices for \mathbb{P}^1 . If you are having trouble getting a particular map to finish, try first computing the possible periods, then try various different *lifting_prime* values.

ALGORITHM:

Modulo each prime of good reduction p determine the set of periodic points modulo p . For each cycle modulo p compute the set of possible periods ($m r p^e$). Take the intersection of the list of possible periods modulo several primes of good reduction to get a possible list of minimal periods of rational periodic points. Take each point modulo p associated to each of these possible periods and try to lift it to a rational point with a combination of p -adic approximation and the LLL basis reduction algorithm.

See [Hutz2015].

INPUT: keyword arguments:

- R – (default: domain of dynamical system) the base ring over which the periodic points of the dynamical system are found

- prime_bound – (default: [1, 20]) a pair (list or tuple) of positive integers that represent the limits of primes to use in the reduction step or an integer that represents the upper bound
- lifting_prime – (default: 23) a prime integer; argument that specifies modulo which prime to try and perform the lifting
- period_degree_bounds – (default: [4, 4]) a pair of positive integers (max period, max degree) for which the dynatomic polynomial should be solved for
- algorithm – (optional) specifies which algorithm to use; current options are *dynatomic* and *lifting*; defaults to solving the dynatomic for low periods and degrees and lifts for everything else
- periods – (optional) a list of positive integers that is the list of possible periods
- bad_primes – (optional) a list or tuple of integer primes; the primes of bad reduction
- ncpus – (default: all cpus) number of cpus to use in parallel

OUTPUT: list of rational points in projective space

EXAMPLES:

```
sage: P.<x,y> = ProjectiveSpace(QQ,1)
sage: f = DynamicalSystem_projective([x^2 - 3/4*y^2, y^2])
sage: sorted(f.all_periodic_points(prime_bound=20, lifting_prime=7)) # long time
[(-1/2 : 1), (1 : 0), (3/2 : 1)]
```

```
sage: P.<x,y,z> = ProjectiveSpace(QQ,2)
sage: f = DynamicalSystem_projective([2*x^3 - 50*x*z^2 + 24*z^3,
....:                                5*y^3 - 53*y*z^2 + 24*z^3, 24*z^3])
sage: sorted(f.all_periodic_points(prime_bound=[1,20])) # long time
[(-3 : -1 : 1), (-3 : 0 : 1), (-3 : 1 : 1), (-3 : 3 : 1), (-1 : -1 : 1),
 (-1 : 0 : 1), (-1 : 1 : 1), (-1 : 3 : 1), (0 : 1 : 0), (1 : -1 : 1),
 (1 : 0 : 0), (1 : 0 : 1), (1 : 1 : 1), (1 : 3 : 1), (3 : -1 : 1),
 (3 : 0 : 1), (3 : 1 : 1), (3 : 3 : 1), (5 : -1 : 1), (5 : 0 : 1),
 (5 : 1 : 1), (5 : 3 : 1)]
```

```
sage: P.<x,y> = ProjectiveSpace(QQ,1)
sage: f = DynamicalSystem_projective([-5*x^2 + 4*y^2, 4*x*y])
sage: sorted(f.all_periodic_points()) # long time
[(-2 : 1), (-2/3 : 1), (2/3 : 1), (1 : 0), (2 : 1)]
```

```
sage: # needs sage.rings.number_field
sage: R.<x> = QQ[]
sage: K.<x> = NumberField(x^2 - x + 1)
sage: P.<u,v> = ProjectiveSpace(K,1)
sage: f = DynamicalSystem_projective([u^2 + v^2, v^2])
sage: sorted(f.all_periodic_points())
# needs sage.rings.function_field
[(-w + 1 : 1), (w : 1), (1 : 0)]
```

```
sage: # needs sage.rings.number_field
sage: R.<x> = QQ[]
sage: K.<x> = NumberField(x^2 - x + 1)
sage: P.<u,v> = ProjectiveSpace(K,1)
sage: f = DynamicalSystem_projective([u^2 + v^2, u*v])
sage: f.all_periodic_points()
# needs sage.rings.function_field
```

(continues on next page)

(continued from previous page)

```
Traceback (most recent call last):
...
NotImplementedError: rational periodic points for number fields
only implemented for polynomials
```

```
sage: # needs sage.rings.number_field
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: K.<v> = QuadraticField(5)
sage: phi = QQ.embeddings(K)[0]
sage: f = DynamicalSystem_projective([x^2 - y^2, y^2])
sage: sorted(f.all_periodic_points(R=phi))
[(-1 : 1), (-1/2*v + 1/2 : 1), (0 : 1), (1 : 0), (1/2*v + 1/2 : 1)]
```

```
sage: P.<x,y,z,w> = ProjectiveSpace(QQ, 3)
sage: f = DynamicalSystem_projective([x^2 - (3/4)*w^2, y^2 - 3/4*w^2,
....: z^2 - 3/4*w^2, w^2])
sage: sorted(f.all_periodic_points(algorithm='dynatomic')) #_
˓needs sage.rings.function_field
[(-1/2 : -1/2 : -1/2 : 1),
 (-1/2 : -1/2 : 3/2 : 1),
 (-1/2 : 3/2 : -1/2 : 1),
 (-1/2 : 3/2 : 3/2 : 1),
 (0 : 0 : 1 : 0),
 (0 : 1 : 0 : 0),
 (0 : 1 : 1 : 0),
 (1 : 0 : 0 : 0),
 (1 : 0 : 1 : 0),
 (1 : 1 : 0 : 0),
 (1 : 1 : 1 : 0),
 (3/2 : -1/2 : -1/2 : 1),
 (3/2 : -1/2 : 3/2 : 1),
 (3/2 : 3/2 : -1/2 : 1),
 (3/2 : 3/2 : 3/2 : 1)]
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem_projective([x^2 - 3/4*y^2, y^2])
sage: sorted(f.all_periodic_points(period_degree_bounds=[2,2])) #_
˓needs sage.rings.function_field
[(-1/2 : 1), (1 : 0), (3/2 : 1)]
```

all_preperiodic_points(**kwd)

Determine the set of rational preperiodic points for this dynamical system.

The map must be defined over \mathbf{Q} and be an endomorphism of projective space. If the map is a polynomial endomorphism of \mathbb{P}^1 , i.e. has a totally ramified fixed point, then the base ring can be an absolute number field. This is done by passing to the Weil restriction.

The default parameter values are typically good choices for \mathbb{P}^1 . If you are having trouble getting a particular map to finish, try first computing the possible periods, then try various different values for `lifting_prime`.

ALGORITHM:

- Determines the list of possible periods.
- Determines the rational periodic points from the possible periods.
- Determines the rational preperiodic points from the rational periodic points by determining rational preimages.

INPUT: keyword arguments:

- R – (default: domain of dynamical system) the base ring over which the periodic points of the dynamical system are found
- prime_bound – (default: $[1, 20]$) a pair (list or tuple) of positive integers that represent the limits of primes to use in the reduction step or an integer that represents the upper bound
- lifting_prime – (default: 23) a prime integer; specifies modulo which prime to try and perform the lifting
- periods – (optional) a list of positive integers that is the list of possible periods
- bad_primes – (optional) a list or tuple of integer primes; the primes of bad reduction
- ncpus – (default: all cpus) number of cpus to use in parallel
- $\text{period_degree_bounds}$ – (default: $[4, 4]$) a pair of positive integers (max period, max degree) for which the dynatomic polynomial should be solved for when in dimension 1
- algorithm – (optional) specifies which algorithm to use; current options are *dynatomic* and *lifting*; defaults to solving the dynatomic for low periods and degrees and lifts for everything else

OUTPUT: list of rational points in projective space

EXAMPLES:

```
sage: PS.<x,y> = ProjectiveSpace(1,QQ)
sage: f = DynamicalSystem_projective([x^2 - y^2, 3*x*y])
sage: sorted(f.all_preperiodic_points())
# needs sage.rings.function_field
[(-2 : 1), (-1 : 1), (-1/2 : 1), (0 : 1), (1/2 : 1), (1 : 0), (1 : 1), (2 : 1)]
```

```
sage: PS.<x,y> = ProjectiveSpace(1,QQ)
sage: f = DynamicalSystem_projective([5*x^3 - 53*x*y^2 + 24*y^3, 24*y^3])
sage: sorted(f.all_preperiodic_points(prime_bound=10))
# needs sage.rings.function_field
[(-1 : 1), (0 : 1), (1 : 1), (3 : 1)]
```

```
sage: PS.<x,y,z> = ProjectiveSpace(2,QQ)
sage: f = DynamicalSystem_projective([x^2 - 21/16*z^2, y^2 - 2*z^2, z^2])
sage: sorted(f.all_preperiodic_points(prime_bound=[1,8], # long
    time
    ....:
    lifting_prime=7, periods=[2]))
[(-5/4 : -2 : 1), (-5/4 : -1 : 1), (-5/4 : 0 : 1), (-5/4 : 1 : 1), (-5/4 : 2 : 1),
 (-1/4 : -2 : 1), (-1/4 : -1 : 1), (-1/4 : 0 : 1), (-1/4 : 1 : 1), (-1/4 : 2 : 1),
 (1/4 : -2 : 1), (1/4 : -1 : 1), (1/4 : 0 : 1), (1/4 : 1 : 1), (1/4 : 2 : 1),
 (5/4 : -2 : 1), (5/4 : -1 : 1), (5/4 : 0 : 1), (5/4 : 1 : 1), (5/4 : 2 : 1)]
```

```
sage: # needs sage.rings.number_field
sage: K.<w> = QuadraticField(33)
sage: PS.<x,y> = ProjectiveSpace(K,1)
sage: f = DynamicalSystem_projective([x^2 - 71/48*y^2, y^2])
sage: sorted(f.all_preperiodic_points()) # long time
[(-1/12*w - 1 : 1),
 (-1/6*w - 1/4 : 1),
 (-1/12*w - 1/2 : 1),
```

(continues on next page)

(continued from previous page)

```
(-1/6*w + 1/4 : 1),
(1/12*w - 1 : 1),
(1/12*w - 1/2 : 1),
(-1/12*w + 1/2 : 1),
(-1/12*w + 1 : 1),
(1/6*w - 1/4 : 1),
(1/12*w + 1/2 : 1),
(1 : 0),
(1/6*w + 1/4 : 1),
(1/12*w + 1 : 1)]
```

all_rational_preimages (points)

Given a set of rational points in the domain of this dynamical system, return all the rational preimages of those points.

In others words, all the rational points which have some iterate in the set points. This function repeatedly calls `rational_preimages()`. If the degree is at least two, by Northcott, this is always a finite set. The map must be defined over number fields and be an endomorphism.

INPUT:

- `points` – list of rational points in the domain of this map

OUTPUT: list of rational points in the domain of this map

EXAMPLES:

```
sage: P.<x,y> = ProjectiveSpace(QQ,1)
sage: f = DynamicalSystem_projective([16*x^2 - 29*y^2, 16*y^2])
sage: sorted(f.all_rational_preimages([P(-1,4)])) #_
˓needs sage.rings.function_field
[(-7/4 : 1), (-5/4 : 1), (-3/4 : 1), (-1/4 : 1), (1/4 : 1), (3/4 : 1),
 (5/4 : 1), (7/4 : 1)]
```

```
sage: P.<x,y,z> = ProjectiveSpace(QQ,2)
sage: f = DynamicalSystem_projective([76*x^2 - 180*x*y + 45*y^2 + 14*x*z
....:                               + 45*y*z - 90*z^2,
....:                               67*x^2 - 180*x*y - 157*x*z + 90*y*z,
....:                               -90*z^2])
sage: sorted(f.all_rational_preimages([P(-9,-4,1)])) #_
˓needs sage.rings.function_field
[(-9 : -4 : 1), (0 : -1 : 1), (0 : 0 : 1), (0 : 1 : 1), (0 : 4 : 1),
 (1 : 0 : 1), (1 : 1 : 1), (1 : 2 : 1), (1 : 3 : 1)]
```

A non-periodic example

```
sage: P.<x,y> = ProjectiveSpace(QQ,1)
sage: f = DynamicalSystem_projective([x^2 + y^2, 2*x*y])
sage: sorted(f.all_rational_preimages([P(17,15)])) #_
˓needs sage.rings.function_field
[(1/3 : 1), (3/5 : 1), (5/3 : 1), (3 : 1)]
```

A number field example:

```
sage: # needs sage.rings.number_field
sage: z = QQ['z'].0
sage: K.<w> = NumberField(z^3 + (z^2)/4 - (41/16)*z + 23/64)
```

(continues on next page)

(continued from previous page)

```
sage: P.<x,y> = ProjectiveSpace(K,1)
sage: f = DynamicalSystem_projective([16*x^2 - 29*y^2, 16*y^2])
sage: sorted(f.all_rational_preimages([P(16*w^2 - 29, 16)]), key=str)
[(-w - 1/2 : 1),
 (-w : 1),
 (-w^2 + 21/16 : 1),
 (-w^2 + 29/16 : 1),
 (-w^2 - w + 25/16 : 1),
 (-w^2 - w + 33/16 : 1),
 (w + 1/2 : 1),
 (w : 1),
 (w^2 + w - 25/16 : 1),
 (w^2 + w - 33/16 : 1),
 (w^2 - 21/16 : 1),
 (w^2 - 29/16 : 1)]
```

```
sage: # needs sage.rings.number_field
sage: K.<w> = QuadraticField(3)
sage: P.<u,v> = ProjectiveSpace(K,1)
sage: f = DynamicalSystem_projective([u^2 + v^2, v^2])
sage: f.all_rational_preimages(P(4)) #_
#_needs sage.rings.function_field
[(-w : 1), (w : 1)]
```

conjugating_set (other, R=None, num_cpus=2)

Return the set of elements in PGL over the base ring that conjugates one dynamical system to the other.

Given two nonconstant rational functions of equal degree, determine if there is a rational element of PGL that conjugates one rational function to another.

The optional argument *R* specifies the field of definition of the PGL elements. The set is determined by taking the fixed points of one map and mapping them to permutations of the fixed points of the other map. As conjugacy preserves the multipliers as a set, fixed points are only mapped to fixed points with the same multiplier. If there are not enough fixed points the function compares the mapping between rational preimages of fixed points and the rational preimages of the preimages of fixed points until there are enough points; such that there are $n + 2$ points with all $n + 1$ subsets linearly independent.

Warning

For degree 1 maps that are conjugate, there is a positive dimensional set of conjugations. This function returns only one such element.

ALGORITHM:

Implementing invariant set algorithm from the paper [FMV2014]. Uses the set of n th preimages of fixed points, as this set is invariant under conjugation to find all elements of PGL that take one set to another. Additionally, keeps track of multiplier information to reduce the necessary combinatorics.

INPUT:

- *other* – a rational function of same degree as this map
- *R* – a field or embedding
- *num_cpus* – (default: 2) the number of threads to run in parallel; increasing *num_cpus* can potentially greatly speed up this function

OUTPUT: set of conjugating $n + 1$ by $n + 1$ matrices

AUTHORS:

- Original algorithm written by Xander Faber, Michelle Manes, Bianca Viray [FMV2014].
- Implemented by Rebecca Lauren Miller as part of GSOC 2016.
- Algorithmic improvement by Alexander Galarraga as part of GSOC 2021.

EXAMPLES:

```
sage: # needs sage.rings.number_field
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem_projective([x^2 - 2*y^2, y^2])
sage: m = matrix(QQbar, 2, 2, [-1, 3, 2, 1])
sage: g = f.conjugate(m)
sage: f.conjugating_set(g)
[
[-1  3]
[ 2  1]
]
```

Increasing num_cpus can speed up computation:

```
sage: P.<x,y,z,w> = ProjectiveSpace(QQ, 3)
sage: f = DynamicalSystem_projective([x^2, y^2, z^2, w^2])
sage: len(f.conjugating_set(f, num_cpus=3)) #_
→needs sage.rings.function_field
24
```

```
sage: # needs sage.rings.number_field
sage: K.<w> = QuadraticField(-1)
sage: P.<x,y> = ProjectiveSpace(K, 1)
sage: f = DynamicalSystem_projective([x^2 + y^2, x*y])
sage: m = matrix(K, 2, 2, [1, 1, 2, 1])
sage: g = f.conjugate(m)
sage: sorted(f.conjugating_set(g))
[
[-1 -1]  [1 1]
[ 2  1], [2 1]
]
```

```
sage: # needs sage.rings.number_field
sage: K.<i> = QuadraticField(-1)
sage: P.<x,y> = ProjectiveSpace(K, 1)
sage: D8 = DynamicalSystem_projective([y^3, x^3])
sage: sorted(D8.conjugating_set(D8))
[
[-1  0]  [-i  0]  [ 0 -1]  [ 0 -i]  [0  i]  [0 1]  [i  0]  [1  0]
[ 0  1], [ 0  1], [ 1  0], [ 1  0], [1 0], [1 0], [0 1], [0 1]
]
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: D8 = DynamicalSystem_projective([y^2, x^2])
sage: D8.conjugating_set(D8) #_
→needs sage.rings.function_field
Traceback (most recent call last):
...

```

(continues on next page)

(continued from previous page)

```
ValueError: no more rational preimages;
try extending the base field and trying again
```

```
sage: P.<x,y> = ProjectiveSpace(GF(7), 1)
sage: D6 = DynamicalSystem_projective([y^2, x^2])
sage: sorted(D6.conjugating_set(D6)) #_
    ↪needs sage.rings.function_field
[
[0 1] [0 2] [0 4] [1 0] [2 0] [4 0]
[1 0], [1 0], [1 0], [0 1], [0 1], [0 1]
]
```

```
sage: P.<x,y,z> = ProjectiveSpace(QQ, 2)
sage: f = DynamicalSystem_projective([x^2 + x*z, y^2, z^2])
sage: f.conjugating_set(f) #_
    ↪needs sage.rings.function_field
[
[1 0 0]
[0 1 0]
[0 0 1]
]
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: R = P.coordinate_ring()
sage: f = DynamicalSystem_projective([R(3), R(4)])
sage: g = DynamicalSystem_projective([R(5), R(2)])
sage: m = f.conjugating_set(g)[0]
sage: f.conjugate(m) == g
True
```

```
sage: # needs sage.rings.number_field
sage: P.<x,y> = ProjectiveSpace(QQbar, 1)
sage: f = DynamicalSystem_projective([7*x + 12*y, 8*x])
sage: g = DynamicalSystem_projective([1645*x - 318*y, 8473*x - 1638*y])
sage: m = f.conjugating_set(g)[0]
sage: f.conjugate(m) == g
True
```

note that only one possible conjugation is returned:

```
sage: P.<x,y,z> = ProjectiveSpace(GF(11), 2)
sage: f = DynamicalSystem_projective([2*x + 12*y, 11*y + 2*z, x + z])
sage: m1 = matrix(GF(11), 3, 3, [1,4,1,0,2,1,1,1,1])
sage: g = f.conjugate(m1)
sage: f.conjugating_set(g)
[
[ 1   0   0]
[ 9   1   4]
[ 4  10   8]
]
```

```
sage: # needs sage.rings.number_field
sage: L.<x> = CyclotomicField(8)
sage: P.<x,y,z> = ProjectiveSpace(L, 2)
sage: f = DynamicalSystem_projective([2*x + 12*y, 11*y + 2*z, x + z])
```

(continues on next page)

(continued from previous page)

```
sage: m1 = matrix(L, 3, 3, [1,4,v^2,0,2,1,1,1,1])
sage: g = f.conjugate(m1)
sage: m = f.conjugating_set(g)[0]      # long time
sage: f.conjugate(m) == g              # long time
True
```

connected_rational_component ($P, n=0$)

Compute the connected component of a rational preperiodic point P by this dynamical system.

Will work for non-preperiodic points if n is positive. Otherwise this will not terminate.

INPUT:

- P – a rational preperiodic point of this map
- n – (default: 0) integer; maximum distance from P to branch out; a value of 0 indicates no bound

OUTPUT: list of points connected to P up to the specified distance

EXAMPLES:

```
sage: # needs sage.rings.number_field
sage: R.<x> = PolynomialRing(QQ)
sage: K.<w> = NumberField(x^3 + 1/4*x^2 - 41/16*x + 23/64)
sage: PS.<x,y> = ProjectiveSpace(1,K)
sage: f = DynamicalSystem_projective([x^2 - 29/16*y^2, y^2])
sage: P = PS([w,1])
sage: sorted(f.connected_rational_component(P), key=str)
[(-w - 1/2 : 1),
 (-w : 1),
 (-w^2 + 21/16 : 1),
 (-w^2 + 29/16 : 1),
 (-w^2 - w + 25/16 : 1),
 (-w^2 - w + 33/16 : 1),
 (w + 1/2 : 1),
 (w : 1),
 (w^2 + w - 25/16 : 1),
 (w^2 + w - 33/16 : 1),
 (w^2 - 21/16 : 1),
 (w^2 - 29/16 : 1)]
```

```
sage: PS.<x,y,z> = ProjectiveSpace(2,QQ)
sage: f = DynamicalSystem_projective([x^2 - 21/16*z^2, y^2 - 2*z^2, z^2])
sage: P = PS([17/16, 7/4, 1])
sage: f.connected_rational_component(P, 3) #_
  ↵needs sage.rings.function_field
[(17/16 : 7/4 : 1),
 (-47/256 : 17/16 : 1),
 (-83807/65536 : -223/256 : 1),
 (-17/16 : -7/4 : 1),
 (-17/16 : 7/4 : 1),
 (17/16 : -7/4 : 1),
 (1386468673/4294967296 : -81343/65536 : 1),
 (-47/256 : -17/16 : 1),
 (47/256 : -17/16 : 1),
 (47/256 : 17/16 : 1),
 (-1/2 : -1/2 : 1),
 (-1/2 : 1/2 : 1),
```

(continues on next page)

(continued from previous page)

```
(1/2 : -1/2 : 1),
(1/2 : 1/2 : 1)]
```

is_conjugate (*other, R=None, num_cpus=2*)

Return whether two dynamical systems are conjugate over their base ring (by default) or over the ring *R* entered as an optional parameter.

ALGORITHM:

Implementing invariant set algorithm from the paper [FMV2014]. Uses the set of *n* th preimages of fixed points, as this set is invariant under conjugation to find all elements of PGL that take one set to another. Additionally, keeps track of multiplier information to reduce the necessary combinatorics.

INPUT:

- *other* – a nonconstant rational function of the same degree as this map
- *R* – a field or embedding
- *num_cpus* – (default: 2) the number of threads to run in parallel; increasing *num_cpus* can potentially greatly speed up this function

OUTPUT: boolean**AUTHORS:**

- Original algorithm written by Xander Faber, Michelle Manes, Bianca Viray [FMV2014].
- Implemented by Rebecca Lauren Miller as part of GSOC 2016.
- Algorithmic improvement by Alexander Galarraga as part of GSOC 2021.

EXAMPLES:

```
sage: # needs sage.rings.number_field
sage: K.<w> = CyclotomicField(3)
sage: P.<x,y> = ProjectiveSpace(K, 1)
sage: D8 = DynamicalSystem_projective([y^2, x^2])
sage: D8.is_conjugate(D8)
True
```

We can speed up computation by increasing *num_cpus*:

```
sage: P.<x,y,z,w> = ProjectiveSpace(QQ, 3)
sage: f = DynamicalSystem_projective([x^2, y^2, z^2, w^2])
sage: f.is_conjugate(f, num_cpus=2) #_
˓needs sage.rings.function_field
True
```

```
sage: # needs sage.rings.number_field
sage: set_verbose(None)
sage: P.<x,y> = ProjectiveSpace(QQbar, 1)
sage: f = DynamicalSystem_projective([x^2 + x*y, y^2])
sage: m = matrix(QQbar, 2, 2, [1, 1, 2, 1])
sage: g = f.conjugate(m)
sage: f.is_conjugate(g)
True
```

```
sage: P.<x,y> = ProjectiveSpace(GF(5), 1)
sage: f = DynamicalSystem_projective([x^3 + x*y^2, y^3])
sage: m = matrix(GF(5), 2, 2, [1, 3, 2, 9])
sage: g = f.conjugate(m)
sage: f.is_conjugate(g)                                     #_
˓needs sage.rings.number_field
True
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem_projective([x^2 + x*y, y^2])
sage: g = DynamicalSystem_projective([x^3 + x^2*y, y^3])
sage: f.is_conjugate(g)
False
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem_projective([x^2 + x*y, y^2])
sage: g = DynamicalSystem_projective([x^2 - 2*y^2, y^2])
sage: f.is_conjugate(g)                                     #_
˓needs sage.rings.number_field
False
```

```
sage: # needs sage.rings.number_field
sage: P.<x,y> = ProjectiveSpace(QQbar, 1)
sage: f = DynamicalSystem_projective([7*x + 12*y, 8*x])
sage: g = DynamicalSystem_projective([1645*x - 318*y, 8473*x - 1638*y])
sage: f.is_conjugate(g)
True
```

Conjugation is only checked over the base field by default:

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem_projective([-3*y^2, 3*x^2])
sage: g = DynamicalSystem_projective([-x^2 - 2*x*y, 2*x*y + y^2])
sage: f.is_conjugate(g), f.is_conjugate(g, R=QQbar)      #_
˓needs sage.rings.number_field
(False, True)
```

```
sage: P.<x,y,z> = ProjectiveSpace(QQ, 2)
sage: f = DynamicalSystem_projective([7*x + 12*y, 8*y + 2*z, x + z])
sage: m1 = matrix(QQ, 3, 3, [1,4,1,0,2,1,1,1,1])
sage: g = f.conjugate(m1)
sage: f.is_conjugate(g)
True
```

```
sage: P.<x,y,z> = ProjectiveSpace(GF(7), 2)
sage: f = DynamicalSystem_projective([2*x + 12*y, 11*y + 2*z, x + z])
sage: m1 = matrix(GF(7), 3, 3, [1,4,1,0,2,1,1,1,1])
sage: g = f.conjugate(m1)
sage: f.is_conjugate(g)
True
```

```
sage: P.<x,y,z> = ProjectiveSpace(QQ, 2)
sage: f = DynamicalSystem_projective([2*x^2 + 12*y*x, 11*y*x + 2*y^2, x^2 + z^2])
sage: m1 = matrix(QQ, 3, 3, [1,4,1,0,2,1,1,1,1])
```

(continues on next page)

(continued from previous page)

```
sage: g = f.conjugate(m1)
sage: f.is_conjugate(g)
True
```

is_newton(*return_conjugation=False*)

Return whether *self* is a Newton map.

A map g is *Newton* if it is conjugate to a map of the form $f(z) = z - \frac{p(z)}{p'(z)}$ after dehomogenization, where $p(z)$ is a squarefree polynomial.

INPUT:

- *return_conjugation* – boolean (default: `False`); if the map is Newton and `True`, then return the conjugation that moves this map to the above form

OUTPUT:

A boolean. If *return_conjugation* is `True`, then this also returns the conjugation as a matrix if *self* is Newton or `None` otherwise.

The conjugation may be defined over an extension if the map has fixed points not defined over the base field.

EXAMPLES:

```
sage: A.<z> = AffineSpace(QQ, 1)
sage: f = DynamicalSystem_affine([z - (z^2 + 1)/(2*z)])
sage: F = f.homogenize(1)
sage: F.is_newton(return_conjugation=True) #_
˓needs sage.rings.number_field
(
    [1 0]
True, [0 1]
)
```

```
sage: A.<z> = AffineSpace(QQ, 1)
sage: f = DynamicalSystem_affine([z^2 + 1])
sage: F = f.homogenize(1)
sage: F.is_newton() #_
˓needs sage.rings.number_field
False
sage: F.is_newton(return_conjugation=True) #_
˓needs sage.rings.number_field
(False, None)
```

```
sage: PP.<x,y> = ProjectiveSpace(QQ, 1)
sage: F = DynamicalSystem_projective([-4*x^3 - 3*x*y^2, -2*y^3])
sage: F.is_newton(return_conjugation=True) [1] #_
˓needs sage.rings.number_field
[
    [0 1]
[-4*a 2*a]
```

```
sage: # needs sage.rings.number_field
sage: K.<zeta> = CyclotomicField(2^4)
sage: A.<z> = AffineSpace(K, 1)
sage: f = DynamicalSystem_affine(z - (z^3 + zeta*z) / (3*z^2 + zeta))
sage: F = f.homogenize(1)
sage: F.is_newton()
True
```

is_polynomial()

Check to see if the dynamical system has a totally ramified fixed point.

The function must be defined over an absolute number field or a finite field.

OUTPUT: boolean

EXAMPLES:

```
sage: # needs sage.rings.number_field
sage: R.<x> = QQ[]
sage: K.<w> = QuadraticField(7)
sage: P.<x,y> = ProjectiveSpace(K, 1)
sage: f = DynamicalSystem_projective([x^2 + 2*x*y - 5*y^2, 2*x*y])
sage: f.is_polynomial()
False
```

```
sage: # needs sage.rings.number_field
sage: R.<x> = QQ[]
sage: K.<w> = QuadraticField(7)
sage: P.<x,y> = ProjectiveSpace(K, 1)
sage: f = DynamicalSystem_projective([x^2 - 7*x*y, 2*y^2])
sage: m = matrix(K, 2, 2, [w, 1, 0, 1])
sage: f = f.conjugate(m)
sage: f.is_polynomial()
True
```

```
sage: # needs sage.rings.number_field
sage: K.<w> = QuadraticField(4/27)
sage: P.<x,y> = ProjectiveSpace(K,1)
sage: f = DynamicalSystem_projective([x^3 + w*y^3, x*y^2])
sage: f.is_polynomial()
False
```

```
sage: # needs sage.rings.finite_rings
sage: K = GF(3^2, prefix='w')
sage: P.<x,y> = ProjectiveSpace(K,1)
sage: f = DynamicalSystem_projective([x^2 + K.gen()*y^2, x*y])
sage: f.is_polynomial()
False
```

```
sage: PS.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem_projective([6*x^2 + 12*x*y + 7*y^2, 12*x*y + 42*y^2])
sage: f.is_polynomial()
False
```

lift_to_rational_periodic(points_modp, B=None)

Given a list of points in projective space over \mathbf{F}_p , determine if they lift to \mathbf{Q} -rational periodic points.

The map must be an endomorphism of projective space defined over \mathbf{Q} .

ALGORITHM:

Use Hensel lifting to find a p -adic approximation for that rational point. The accuracy needed is determined by the height bound B . Then apply the LLL algorithm to determine if the lift corresponds to a rational point.

If the point is a point of high multiplicity (multiplier 1), the procedure can be very slow.

INPUT:

- `points_modp` – list or tuple of pairs containing a point in projective space over \mathbf{F}_p and the possible period
- `B` – (optional) a positive integer; the height bound for a rational preperiodic point

OUTPUT: list of projective points

EXAMPLES:

```
sage: P.<x,y> = ProjectiveSpace(QQ,1)
sage: f = DynamicalSystem_projective([x^2 - y^2, y^2])
sage: f.lift_to_rational_periodic([[P(0,1).change_ring(GF(7)), 4]])      # long time
→ needs sage.symbolic
[[ (0 : 1), 2]]
```

There may be multiple points in the lift.

```
sage: P.<x,y> = ProjectiveSpace(QQ,1)
sage: f = DynamicalSystem_projective([-5*x^2 + 4*y^2, 4*x*y])
sage: f.lift_to_rational_periodic([[P(1,0).change_ring(GF(3)), 1]])      # long time
[[ (1 : 0), 1], [(2/3 : 1), 1], [(-2/3 : 1), 1]]
```

```
sage: P.<x,y> = ProjectiveSpace(QQ,1)
sage: f = DynamicalSystem_projective([16*x^2 - 29*y^2, 16*y^2])
sage: f.lift_to_rational_periodic([[P(3,1).change_ring(GF(13)), 3]])      # long time
→ needs sage.symbolic
[[ (-1/4 : 1), 3]]
```

```
sage: P.<x,y,z> = ProjectiveSpace(QQ, 2)
sage: f = DynamicalSystem_projective([
....:     76*x^2 - 180*x*y + 45*y^2
....:     + 14*x*z + 45*y*z - 90*z^2,
....:     67*x^2 - 180*x*y - 157*x*z + 90*y*z,
....:     -90*z^2])
sage: f.lift_to_rational_periodic([[P(14,19,1).change_ring(GF(23)), 9]])      # long time
[[ (-9 : -4 : 1), 9]]
```

`normal_form(return_conjugation=False)`

Return a normal form in the moduli space of dynamical systems.

Currently implemented only for polynomials. The totally ramified fixed point is moved to infinity and the map is conjugated to the form $x^n + a_{n-2}x^{n-2} + \dots + a_0$. Note that for finite fields we can only remove the $(n-1)$ -st term when the characteristic does not divide n .

INPUT:

- `return_conjugation` – boolean (default: `False`); if `True`, then return the conjugation element of `PGL` along with the embedding into the new field

OUTPUT:

- `SchemeMorphism_polynomial`
- (optional) an element of `PGL` as a matrix
- (optional) the field embedding

EXAMPLES:

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem_projective([x^2 + 2*x*y - 5*x^2, 2*x*y])
sage: f.normal_form()
Traceback (most recent call last):
...
NotImplementedError: map is not a polynomial
```

```
sage: # needs sage.rings.number_field
sage: R.<x> = QQ[]
sage: K.<w> = NumberField(x^2 - 5)
sage: P.<x,y> = ProjectiveSpace(K,1)
sage: f = DynamicalSystem_projective([x^2 + w*x*y, y^2])
sage: g,m,psi = f.normal_form(return_conjugation=True); m
[ 1 -1/2*w]
[ 0 1]
sage: f.change_ring(psi).conjugate(m) == g
True
```

```
sage: P.<x,y> = ProjectiveSpace(QQ,1)
sage: f = DynamicalSystem_projective([13*x^2 + 4*x*y + 3*y^2, 5*y^2])
sage: f.normal_form()
# needs sage.libs.pari
Dynamical System of Projective Space of dimension 1 over Rational Field
Defn: Defined on coordinates by sending (x : y) to
(5*x^2 + 9*y^2 : 5*y^2)
```

```
sage: # needs sage.rings.finite_rings
sage: K = GF(3^3, prefix='w')
sage: P.<x,y> = ProjectiveSpace(K,1)
sage: f = DynamicalSystem_projective([x^3 + 2*x^2*y + 2*x*y^2 + K.gen()*y^3, -y^3])
sage: f.normal_form()
Dynamical System of Projective Space of dimension 1
over Finite Field in w3 of size 3^3
Defn: Defined on coordinates by sending (x : y) to
(x^3 + x^2*y + x*y^2 + (-w3)*y^3 : y^3)
```

```
sage: P.<x,y> = ProjectiveSpace(GF(3),1)
sage: f = DynamicalSystem_projective([2*x**3 + x**2*y, y**3])
sage: g,m,psi = f.normal_form(return_conjugation=True); psi
# needs sage.rings.finite_rings
Ring morphism:
From: Finite Field of size 3
To:  Finite Field in z2 of size 3^2
Defn: 1 |--> 1
```

Fixes Issue #38012 by not forcing univariate polynomial to be univariate:

```
sage: R.<z> = PolynomialRing(QQ)
sage: f = DynamicalSystem_affine(z^2 + z + 1).homogenize(1)
sage: f.normal_form()
Dynamical System of Projective Space of dimension 1 over Rational Field
Defn: Defined on coordinates by sending (x0 : x1) to
(x0^2 + 5/4*x1^2 : x1^2)
```

`potential_good_reduction(prime, return_conjugation=False)`

Return `True` if this dynamical system has potential good reduction at `prime`.

A dynamical system has good reduction at `prime` if after the coefficients are reduced modulo `prime` the degree remains the same. A dynamical system f has *potential* good reduction if there exists $\phi \in PGL(n, \overline{K})$ such that $\phi^{-1} \circ f \circ \phi$ has good reduction.

If this dynamical system f has potential good reduction at `prime`, a dynamical system $g = \phi^{-1} \circ f \circ \phi$ which has good reduction at `prime` is returned.

This dynamical system must have as its domain $\mathbb{P}^1(K)$, where K is a number field.

INPUT:

- `prime` – a prime ideal of the field of definition of the fixed points of the map, or a prime number in \mathbf{Q} if the field of definition of the fixed points is \mathbf{Q} .
- `return_conjugation` – boolean (default: `False`); if set to `True`, the PGL_2 map used to achieve good reduction will be returned

OUTPUT: a tuple:

- The first element is: - `False` if this dynamical system does not have potential good reduction. - `True` if this dynamical system does have potential good reduction.
- The second element is: - `None` if this dynamical system does not have potential good reduction. - A dynamical system with good reduction at `prime` otherwise.
- If `return_conjugation` is `True`, then the tuple will have a third element, which is: - `None` if this dynamical system does not have potential good reduction. - The PGL_2 map used to achieve good reduction otherwise.

EXAMPLES:

```
sage: # needs sage.rings.number_field
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: system = DynamicalSystem_projective([x^2 - y^2, 2*x*y])
sage: prime = system.field_of_definition_periodic(1).prime_above(2)
sage: new_system = system.potential_good_reduction(prime) [1]
sage: new_system
Dynamical System of Projective Space of dimension 1 over Number Field
in a with defining polynomial x^2 + 1
Defn: Defined on coordinates by sending (x : y) to
((-1/2*a)*x^2 + (-5/2*a)*y^2 : (-a)*x*y + y^2)
```

Note that this map has good reduction at 2:

```
sage: new_system.resultant()
# needs sage.rings.number_field
1
```

Using `return_conjugation`, we can get the conjugation that achieves good reduction:

```
sage: conj = system.potential_good_reduction(prime, True) [2]; conj
# needs sage.rings.number_field
[-1/2*a  1/2]
[  0   1]
```

We can check that this conjugation achieves good reduction:

```
sage: system.conjugate(conj).resultant()
# needs sage.rings.number_field
1
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: system = DynamicalSystem_projective([3^4*x^3 + 3*x*y^2 + y^3, 3^6*y^3])
sage: prime = system.field_of_definition_periodic(1).prime_above(3)      #_
↳needs sage.rings.number_field
sage: system.potential_good_reduction(prime)                                #_
↳needs sage.rings.number_field
(False, None)
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: system = DynamicalSystem_projective([x^5 - x*y^4, 5*y^5])
sage: prime = system.field_of_definition_periodic(1).prime_above(5)      #_
↳needs sage.rings.number_field
sage: system.potential_good_reduction(prime)                                #_
↳needs sage.rings.number_field
(False, None)
```

rational_preperiodic_graph(**kwds)

Determine the directed graph of the rational preperiodic points for this dynamical system.

The map must be defined over \mathbb{Q} and be an endomorphism of projective space. If this map is a polynomial endomorphism of \mathbb{P}^1 , i.e. has a totally ramified fixed point, then the base ring can be an absolute number field. This is done by passing to the Weil restriction.

ALGORITHM:

- Determines the list of possible periods.
- Determines the rational periodic points from the possible periods.
- Determines the rational preperiodic points from the rational periodic points by determining rational preimages.

INPUT: keyword arguments:

- prime_bound – (default: [1, 20]) a pair (list or tuple) of positive integers that represent the limits of primes to use in the reduction step or an integer that represents the upper bound
- lifting_prime – (default: 23) a prime integer; specifies modulo which prime to try and perform the lifting
- periods – (optional) a list of positive integers that is the list of possible periods
- bad_primes – (optional) a list or tuple of integer primes; the primes of bad reduction
- ncpus – (default: all cpus) number of cpus to use in parallel

OUTPUT:

A digraph representing the orbits of the rational preperiodic points in projective space.

EXAMPLES:

```
sage: PS.<x,y> = ProjectiveSpace(1,QQ)
sage: f = DynamicalSystem_projective([7*x^2 - 28*y^2, 24*x*y])
sage: f.rational_preperiodic_graph()                                     #_
↳needs sage.rings.function_field
Looped digraph on 12 vertices
```

```
sage: PS.<x,y> = ProjectiveSpace(1,QQ)
sage: f = DynamicalSystem_projective([-3/2*x^3 + 19/6*x*y^2, y^3])
sage: f.rational_preperiodic_graph(prime_bound=[1,8])                  #_
```

(continues on next page)

(continued from previous page)

```
→needs sage.rings.function_field
Looped digraph on 12 vertices
```

```
sage: P.<x,y,z> = ProjectiveSpace(2,QQ)
sage: f = DynamicalSystem_projective([2*x^3 - 50*x*z^2 + 24*z^3,
.....:                                5*y^3 - 53*y*z^2 + 24*z^3, 24*z^3])
sage: f.rational_preperiodic_graph(prime_bound=[1,11],   # long time
.....:                                lifting_prime=13)
Looped digraph on 30 vertices
```

```
sage: # needs sage.rings.number_field
sage: K.<w> = QuadraticField(-3)
sage: P.<x,y> = ProjectiveSpace(K,1)
sage: f = DynamicalSystem_projective([x^2 + y^2, y^2])
sage: f.rational_preperiodic_graph()          # long time
Looped digraph on 5 vertices
```

reduce_base_field()

Return this map defined over the field of definition of the coefficients.

The base field of the map could be strictly larger than the field where all of the coefficients are defined. This function reduces the base field to the minimal possible. This can be done when the base ring is a number field, QQbar, a finite field, or algebraic closure of a finite field.

OUTPUT: a dynamical system

EXAMPLES:

```
sage: # needs sage.rings.finite_rings
sage: K.<t> = GF(2^3)
sage: P.<x,y,z> = ProjectiveSpace(K, 2)
sage: f = DynamicalSystem_projective([x^2 + y^2, y^2, z^2+z*y])
sage: f.reduce_base_field()
Dynamical System of Projective Space of dimension 2 over Finite Field of size →
→2
Defn: Defined on coordinates by sending (x : y : z) to
(x^2 + y^2 : y^2 : y*z + z^2)
```

```
sage: # needs sage.rings.number_field sage.symbolic
sage: P.<x,y,z> = ProjectiveSpace(QQbar, 2)
sage: f = DynamicalSystem_projective([x^2 + QQbar(sqrt(3))*y^2,
.....:                                y^2, QQbar(sqrt(2))*z^2])
sage: f.reduce_base_field()
Dynamical System of Projective Space of dimension 2 over Number Field in a
with defining polynomial y^4 - 4*y^2 + 1 with a = -0.5176380902050415?
Defn: Defined on coordinates by sending (x : y : z) to
(x^2 + (-a^2 + 2)*y^2 : y^2 : (a^3 - 3*a)*z^2)
```

```
sage: # needs sage.rings.number_field
sage: R.<x> = QQ[]
sage: K.<y> = NumberField(x^3 - 2, embedding=(x^3 - 2).roots(ring=CC)[0][0])
sage: R.<x> = QQ[]
sage: L.<w> = NumberField(x^6 + 9*x^4 - 4*x^3 + 27*x^2 + 36*x + 31,
.....:                                embedding=(x^6 + 9*x^4 - 4*x^3
.....:                                + 27*x^2 + 36*x + 31).
.....:                                roots(ring=CC)[0][0])
```

(continues on next page)

(continued from previous page)

```
sage: P.<x,y> = ProjectiveSpace(L,1)
sage: f = DynamicalSystem([L(v)*x^2 + y^2, x*y])
sage: f.reduce_base_field().base_ring().is_isomorphic(K)
True
```

```
sage: # needs sage.rings.number_field
sage: K.<v> = CyclotomicField(5)
sage: A.<x,y> = ProjectiveSpace(K, 1)
sage: f = DynamicalSystem_projective([3*x^2 + y^2, x*y])
sage: f.reduce_base_field()
Dynamical System of Projective Space of dimension 1 over Rational Field
Defn: Defined on coordinates by sending (x : y) to
      (3*x^2 + y^2 : x*y)
```

class sage.dynamics.arithmetic_dynamics.projective_ds.**DynamicalSystem_projective_finite_field**

Bases: *DynamicalSystem_projective_field*, *SchemeMorphism_polynomial_projective_space_finite_field*

all_periodic_points(kwds)**

Return a list of all periodic points over a finite field.

INPUT: keyword arguments:

- R – (default: base ring of dynamical system) the base ring over which the periodic points of the dynamical system are found

OUTPUT: list of elements which are periodic

EXAMPLES:

```
sage: # needs sage.rings.finite_rings
sage: P.<x,y> = ProjectiveSpace(GF(5^2),1)
sage: f = DynamicalSystem_projective([x^2 + y^2, x*y])
sage: f.all_periodic_points()
[(1 : 0), (z2 + 2 : 1), (4*z2 + 3 : 1)]
```

```
sage: P.<x,y,z> = ProjectiveSpace(GF(5),2)
sage: f = DynamicalSystem_projective([x^2 + y^2 + z^2, x*y + x*z, z^2])
sage: f.all_periodic_points()
[(1 : 0 : 0),
 (0 : 0 : 1),
 (1 : 0 : 1),
 (2 : 1 : 1),
 (1 : 4 : 1),
 (3 : 0 : 1),
 (0 : 3 : 1)]
```

```
sage: P.<x,y> = ProjectiveSpace(GF(3), 1)
sage: f = DynamicalSystem_projective([x^2 - y^2, y^2])
sage: f.all_periodic_points(R=GF(3^2, 't')) #_
  ↪needs sage.rings.finite_rings
[(1 : 0), (0 : 1), (2 : 1), (t : 1), (2*t + 1 : 1)]
```

automorphism_group(kwds)**

Return the subgroup of PGL_2 that is the automorphism group of this dynamical system.

The automorphism group is the set of PGL_2 elements that fixed the map under conjugation.

For dimension 1, see [FMV2014] for the algorithm.

For dimension greater than 1, we compute the conjugating set of this dynamical system with itself.

INPUT:

The following keywords are used when the dimension of the domain is greater than 1:

- `num_cpus` – (default: 2) the number of threads to use; setting to a larger number can greatly speed up this function

The following keywords are used when the dimension of the domain is 1:

- `absolute` – boolean (default: `False`); if `True`, then return the absolute automorphism group and a field of definition
- `iso_type` – boolean (default: `False`); if `True`, then return the isomorphism type of the automorphism group
- `return_functions` – boolean (default: `False`); `True` returns elements as linear fractional transformations and `False` returns elements as PGL_2 matrices

OUTPUT: list of elements of the automorphism group

AUTHORS:

- Original algorithm written by Xander Faber, Michelle Manes, Bianca Viray
- Modified by Joao Alberto de Faria, Ben Hutz, Bianca Thompson

EXAMPLES:

```
sage: # needs sage.rings.finite_rings
sage: R.<x,y> = ProjectiveSpace(GF(7^3, 't'), 1)
sage: f = DynamicalSystem_projective([x^2 - y^2, x*y])
sage: f.automorphism_group()
[
[1 0]  [6 0]
[0 1], [0 1]
]
```

```
sage: # needs sage.rings.finite_rings
sage: R.<x,y> = ProjectiveSpace(GF(3^2, 't'), 1)
sage: f = DynamicalSystem_projective([x^3, y^3])
sage: lst, label = f.automorphism_group(return_functions=True),      # long_
→time
....:                                         iso_type=True)
sage: sorted(lst, key=str), label                                         # long_
→time
([(2*x + 1)/(x + 1),
 (2*x + 1)/x,
 (2*x + 2)/(x + 2),
 (2*x + 2)/x,
 (x + 1)/(x + 2),
 (x + 1)/x,
 (x + 2)/(x + 1),
 (x + 2)/x,
 1/(x + 1),
 1/(x + 2),
 1/x,
```

(continues on next page)

(continued from previous page)

```
2*x,
2*x + 1,
2*x + 2,
2*x/(x + 1),
2*x/(x + 2),
2/(x + 1),
2/(x + 2),
2/x,
x,
x + 1,
x + 2,
x/(x + 1),
x/(x + 2)],
'PGL(2,3)')
```

```
sage: # needs sage.rings.finite_rings
sage: R.<x,y> = ProjectiveSpace(GF(2^5,'t'),1)
sage: f = DynamicalSystem_projective([x^5, y^5])
sage: f.automorphism_group(return_functions=True, iso_type=True)
([x, 1/x], 'Cyclic of order 2')
```

```
sage: # needs sage.rings.finite_rings
sage: R.<x,y> = ProjectiveSpace(GF(3^4,'t'),1)
sage: f = DynamicalSystem_projective([x^2 + 25*x*y + y^2, x*y + 3*y^2])
sage: f.automorphism_group(absolute=True)
[Univariate Polynomial Ring in w over Finite Field in b of size 3^4,
 [
 [1 0]
 [0 1]
 ]]
```

```
sage: R.<x,y,z> = ProjectiveSpace(GF(5), 2)
sage: f = DynamicalSystem_projective([x^3 + x*z^2, y^3 + y*z^2, z^3])
sage: all([f.conjugate(m) == f for m in f.automorphism_group()])
# needs sage.rings.function_field
True
```

cyclegraph()

Return the digraph of all orbits of this dynamical system.

Over a finite field this is a finite graph. For subscheme domains, only points on the subscheme whose image are also on the subscheme are in the digraph.

OUTPUT: a digraph

EXAMPLES:

```
sage: P.<x,y> = ProjectiveSpace(GF(13),1)
sage: f = DynamicalSystem_projective([x^2 - y^2, y^2])
sage: f.cyclegraph()
# needs sage.graphs
Looped digraph on 14 vertices
```

```
sage: # needs sage.rings.finite_rings
sage: P.<x,y,z> = ProjectiveSpace(GF(3^2,'t'),2)
sage: f = DynamicalSystem_projective([x^2 + y^2, y^2, z^2 + y*z])
```

(continues on next page)

(continued from previous page)

```
sage: f.cyclegraph() #_
→needs sage.graphs
Looped digraph on 91 vertices
```

```
sage: P.<x,y,z> = ProjectiveSpace(GF(7),2)
sage: X = P.subscheme(x^2 - y^2)
sage: f = DynamicalSystem_projective([x^2, y^2, z^2], domain=X)
sage: f.cyclegraph() #_
→needs sage.graphs
Looped digraph on 15 vertices
```

```
sage: P.<x,y,z> = ProjectiveSpace(GF(3),2)
sage: f = DynamicalSystem_projective([x*z - y^2, x^2 - y^2, y^2 - z^2])
sage: f.cyclegraph() #_
→needs sage.graphs
Looped digraph on 13 vertices
```

```
sage: P.<x,y,z> = ProjectiveSpace(GF(3),2)
sage: X = P.subscheme([x - y])
sage: f = DynamicalSystem_projective([x^2 - y^2, x^2 - y^2, y^2 - z^2], ↴
→domain=X)
sage: f.cyclegraph() #_
→needs sage.graphs
Looped digraph on 4 vertices
```

is_postcritically_finite(kwds)**

Every point is postcritically finite in a finite field.

INPUT: None. kwds is to parallel the overridden function

OUTPUT: the boolean True

EXAMPLES:

```
sage: P.<x,y,z> = ProjectiveSpace(GF(5),2)
sage: f = DynamicalSystem_projective([x^2 + y^2, y^2, z^2 + y*z], domain=P)
sage: f.is_postcritically_finite()
True
```

```
sage: P.<x,y> = ProjectiveSpace(GF(13),1)
sage: f = DynamicalSystem_projective([x^4 - x^2*y^2 + y^4, y^4])
sage: f.is_postcritically_finite(use_algebraic_closure=False)
True
```

orbit_structure(P)

Return the pair (m, n) , where m is the preperiod and n is the period of the point P by this dynamical system.

Every point is preperiodic over a finite field so every point will be preperiodic.

INPUT:

- P – a point in the domain of this map

OUTPUT: a tuple (m, n) of integers

EXAMPLES:

```
sage: P.<x,y,z> = ProjectiveSpace(GF(5),2)
sage: f = DynamicalSystem_projective([x^2 + y^2, y^2, z^2 + y*z], domain=P)
sage: f.orbit_structure(P(2,1,2))
(0, 6)
```

```
sage: P.<x,y,z> = ProjectiveSpace(GF(7),2)
sage: X = P.subscheme(x^2 - y^2)
sage: f = DynamicalSystem_projective([x^2, y^2, z^2], domain=X) #_
sage: f.orbit_structure(X(1,1,2))
→ needs sage.rings.function_field
(0, 2)
```

```
sage: P.<x,y> = ProjectiveSpace(GF(13),1)
sage: f = DynamicalSystem_projective([x^2 - y^2, y^2], domain=P)
sage: f.orbit_structure(P(3,4))
(2, 3)
```

```
sage: # needs sage.rings.finite_rings
sage: R.<t> = GF(13^3)
sage: P.<x,y> = ProjectiveSpace(R,1)
sage: f = DynamicalSystem_projective([x^2 - y^2, y^2], domain=P)
sage: f.orbit_structure(P(t, 4))
(11, 6)
```

possible_periods (return_points=False)

Return the list of possible minimal periods of a periodic point over **Q** and (optionally) a point in each cycle.

ALGORITHM:

See [Hutz2009].

INPUT:

- `return_points` – boolean (default: `False`); if `True`, then return the points as well as the possible periods

OUTPUT:

A list of positive integers, or a list of pairs of projective points and periods if `return_points` is `True`.

EXAMPLES:

```
sage: P.<x,y> = ProjectiveSpace(GF(23),1)
sage: f = DynamicalSystem_projective([x^2 - 2*y^2, y^2])
sage: f.possible_periods() #_
→ needs sage.libs.pari
[1, 5, 11, 22, 110]
```

```
sage: P.<x,y> = ProjectiveSpace(GF(13),1)
sage: f = DynamicalSystem_projective([x^2 - y^2, y^2])
sage: sorted(f.possible_periods(True)) #_
→ needs sage.libs.pari
[[ (0 : 1), 2], [(1 : 0), 1], [(3 : 1), 3], [(3 : 1), 36]]
```

```
sage: PS.<x,y,z> = ProjectiveSpace(2,GF(7))
sage: f = DynamicalSystem_projective([-360*x^3 + 760*x*z^2,
....:                                     y^3 - 604*y*z^2 + 240*z^3, 240*z^3])
```

(continues on next page)

(continued from previous page)

```
sage: f.possible_periods()
→needs sage.libs.pari
[1, 2, 4, 6, 12, 14, 28, 42, 84]
```

Todo

- do not return duplicate points
- improve hash to reduce memory of point-table

5.4 Dynamical systems for products of projective spaces

This class builds on the product projective space class. The main constructor functions are given by `DynamicalSystem` and `DynamicalSystem_projective`. The constructors function can take either polynomials or a morphism from which to construct a dynamical system.

The must be specified.

EXAMPLES:

```
sage: P1xP1.<x,y,u,v> = ProductProjectiveSpaces(QQ, [1, 1])
sage: DynamicalSystem_projective([x^2*u, y^2*v, x*v^2, y*u^2], domain=P1xP1)
Dynamical System of Product of projective spaces P^1 x P^1 over Rational Field
Defn: Defined by sending (x : y , u : v) to
      (x^2*u : y^2*v , x*v^2 : y*u^2).
```

```
class sage.dynamics.arithmetic_dynamics.product_projective_ds.DynamicalSystem_product_proje
```

Bases: `DynamicalSystem`, `ProductProjectiveSpaces_morphism_ring`

The class of dynamical systems on products of projective spaces.

Warning

You should not create objects of this class directly because no type or consistency checking is performed. The preferred method to construct such dynamical systems is to use `DynamicalSystem_projective()` function.

INPUT:

- `polys` – list of $n_1 + \dots + n_r$ multi-homogeneous polynomials, all of which should have the same parent
- `domain` – a projective scheme embedded in $P^{n_1-1} \times \dots \times P^{n_r-1}$

EXAMPLES:

```
sage: T.<x,y,z,w,u> = ProductProjectiveSpaces([2, 1], QQ)
sage: DynamicalSystem_projective([x^2, y^2, z^2, w^2, u^2], domain=T)
Dynamical System of Product of projective spaces P^2 x P^1 over Rational Field
Defn: Defined by sending (x : y : z , w : u) to (x^2 : y^2 : z^2 , w^2 : u^2).
```

`nth_iterate(P, n, normalize=False)`

Return the n-th iterate of P by this dynamical system.

If `normalize` is `True`, then the coordinates are automatically normalized.

Todo

Is there a more efficient way to do this?

INPUT:

- P – a point in `self.domain()`
- n – positive integer
- `normalize` – boolean (default: `False`)

OUTPUT: a point in `self.codomain()`

EXAMPLES:

```
sage: Z.<a,b,x,y,z> = ProductProjectiveSpaces([1, 2], QQ)
sage: f = DynamicalSystem_projective([a^3, b^3 + a*b^2, x^2, y^2 - z^2, z*y], domain=Z)
....:
sage: P = Z([1, 1, 1, 1, 1])
sage: f.nth_iterate(P, 3)
(1/1872 : 1 , 1 : 1 : 0)
```

```
sage: Z.<a,b,x,y> = ProductProjectiveSpaces([1, 1], ZZ)
sage: f = DynamicalSystem_projective([a*b, b^2, x^3 - y^3, y^2*x], domain=Z)
sage: P = Z([2, 6, 2, 4])
sage: f.nth_iterate(P, 2, normalize=True)
(1 : 3 , 407 : 112)
```

`nth_iterate_map(n)`

Return the n-th iterate of this dynamical system.

ALGORITHM:

Uses a form of successive squaring to reduce computations.

Todo

This could be improved.

INPUT:

- n – positive integer

OUTPUT: a dynamical system of products of projective spaces

EXAMPLES:

```
sage: Z.<a,b,x,y,z> = ProductProjectiveSpaces([1 , 2], QQ)
sage: f = DynamicalSystem_projective([a^3, b^3, x^2, y^2, z^2], domain=Z)
sage: f.nth_iterate_map(3)
Dynamical System of Product of projective spaces P^1 x P^2 over Rational Field
```

(continues on next page)

(continued from previous page)

```
Defn: Defined by sending (a : b , x : y : z) to
(a^27 : b^27 , x^8 : y^8 : z^8).
```

orbit(*P, N, **kwds*)

Return the orbit of *P* by this dynamical system.

Let *F* be this dynamical system. If *N* is an integer return [*P, F(P), ..., FN(P)*].

If *N* is a list or tuple *N* = [*m, k*] return [*Fm(P), ..., Fk(P)*]. Automatically normalize the points if normalize is True. Perform the checks on point initialize if check is True.

INPUT:

- *P* – a point in self.domain()
- *N* – nonnegative integer or list or tuple of two nonnegative integers

kwds:

- check – boolean (default: True)
- normalize – boolean (default: False)

OUTPUT: list of points in self.codomain()

EXAMPLES:

```
sage: Z.<a,b,x,y,z> = ProductProjectiveSpaces([1, 2], QQ)
sage: f = DynamicalSystem_projective([a^3, b^3 + a*b^2, x^2, y^2 - z^2, z*y], domain=Z)
....:
sage: P = Z([1, 1, 1, 1, 1])
sage: f.orbit(P, 3)
[(1 : 1 , 1 : 1 : 1), (1/2 : 1 , 1 : 0 : 1),
 (1/12 : 1 , -1 : 1 : 0), (1/1872 : 1 , 1 : 1 : 0)]
```

```
sage: Z.<a,b,x,y> = ProductProjectiveSpaces([1, 1], ZZ)
sage: f = DynamicalSystem_projective([a*b, b^2, x^3 - y^3, y^2*x], domain=Z)
sage: P = Z([2, 6, 2, 4])
sage: f.orbit(P, 3, normalize=True)
[(1 : 3 , 1 : 2), (1 : 3 , -7 : 4),
 (1 : 3 , 407 : 112), (1 : 3 , 66014215 : 5105408)]
```

class sage.dynamics.arithmetic_dynamics.product_projective_ds.**DynamicalSystem_product_projective**

Bases: *DynamicalSystem_product_projective*

class sage.dynamics.arithmetic_dynamics.product_projective_ds.**DynamicalSystem_product_projective_field**

Bases: *DynamicalSystem_product_projective_field*

cyclegraph()

Return the digraph of all orbits of this morphism mod *p*.

OUTPUT: a digraph

EXAMPLES:

```
sage: P.<a,b,c,d> = ProductProjectiveSpaces(GF(3), [1,1])
sage: f = DynamicalSystem_projective([a^2, b^2, c^2, d^2], domain=P)
sage: f.cyclegraph()
# needs sage.graphs
Looped digraph on 16 vertices
```

```
sage: P.<a,b,c,d> = ProductProjectiveSpaces(GF(5), [1,1])
sage: f = DynamicalSystem_projective([a^2, b^2, c, d], domain=P)
sage: f.cyclegraph()
# needs sage.graphs
Looped digraph on 36 vertices
```

```
sage: P.<a,b,c,d,e> = ProductProjectiveSpaces(GF(2), [1,2])
sage: f = DynamicalSystem_projective([a^2, b^2, c, d, e], domain=P)
sage: f.cyclegraph()
# needs sage.graphs
Looped digraph on 21 vertices
```

Todo

Dynamical systems for subschemes of product projective spaces needs work. Thus this is not implemented for subschemes.

5.5 Wehler K3 Surfaces

AUTHORS:

- Ben Hutz (11-2012)
- Joao Alberto de Faria (10-2013)

Todo

Hasse-Weil Zeta Function

Picard Number

Number Fields

REFERENCES: [FH2015], [CS1996], [Weh1998], [Hutz2007]

`sage.dynamics.arithmetic_dynamics.wehlerK3.WehlerK3Surface(polys)`

Define a K3 Surface over $\mathbb{P}^2 \times \mathbb{P}^2$ defined as the intersection of a bilinear and biquadratic form. [Weh1998]

INPUT:

- `polys` – bilinear and biquadratic polynomials as a tuple or list

OUTPUT: `WehlerK3Surface_ring`

EXAMPLES:

```

sage: PP.<x0, x1, x2, y0, y1, y2> = ProductProjectiveSpaces([2, 2], QQ)
sage: L = x0*y0 + x1*y1 - x2*y2
sage: Q = x0*x1*y1^2 + x2^2*y0*y2
sage: WehlerK3Surface([L, Q])
Closed subscheme of Product of projective spaces P^2 x P^2 over Rational
Field defined by:
x0*y0 + x1*y1 - x2*y2,
x0*x1*y1^2 + x2^2*y0*y2

```

class sage.dynamics.arithmetic_dynamics.wehlerK3.WehlerK3Surface_field(*polys*)
Bases: *WehlerK3Surface_ring*

class sage.dynamics.arithmetic_dynamics.wehlerK3.WehlerK3Surface_finite_field(*polys*)
Bases: *WehlerK3Surface_field*

cardinality()
Count the total number of points on the K3 surface.

ALGORITHM:
Enumerate points over \mathbb{P}^2 , and then count the points on the fiber of each of those points.

OUTPUT: integer; total number of points on the surface

EXAMPLES:

```

sage: PP.<x0, x1, x2, y0, y1, y2> = ProductProjectiveSpaces([2, 2], GF(7))
sage: Z = x0^2*y0^2 + 3*x0*x1*y0^2 + x1^2*y0^2 + 4*x0^2*y0*y1 + \
3*x0*x1*y0*y1 - 2*x2^2*y0*y1 - x0^2*y1^2 + 2*x1^2*y1^2 - x0*x2*y1^2 \
- 4*x1*x2*y1^2 + 5*x0*x2*y0*y2 - 4*x1*x2*y0*y2 + 7*x0^2*y1*y2 + 4*x1^2*y1*y2 \
+ x0*x1*y2^2 + 3*x2^2*y2^2
sage: Y = x0*y0 + x1*y1 + x2*y2
sage: X = WehlerK3Surface([Z, Y])
sage: X.cardinality()
55

```

class sage.dynamics.arithmetic_dynamics.wehlerK3.WehlerK3Surface_ring(*polys*)
Bases: *AlgebraicScheme_subscheme_product_projective*

A K3 surface in $\mathbb{P}^2 \times \mathbb{P}^2$ defined as the intersection of a bilinear and biquadratic form. [Weh1998]

EXAMPLES:

```

sage: R.<x, y, z, u, v, w> = PolynomialRing(QQ, 6)
sage: L = x*u - y*v
sage: Q = x*y*v^2 + z^2*u*w
sage: WehlerK3Surface([L, Q])
Closed subscheme of Product of projective spaces P^2 x P^2 over Rational
Field defined by:
x*u - y*v,
x*y*v^2 + z^2*u*w

```

Gpoly(*component*, *k*)

Return the G polynomials G_k^* .

They are defined as: $G_k^* = (L_j^*)^2 Q_{ii}^* - L_i^* L_j^* Q_{ij}^* + (L_i^*)^2 Q_{jj}^*$ where (i, j, k) is some permutation of $(0, 1, 2)$ and $*$ is either x (*component*=1) or y (*component*=0).

INPUT:

- component – integer; 0 or 1
- k – integer; 0, 1 or 2

OUTPUT: polynomial in terms of either y (component=0) or x (component=1)

EXAMPLES:

```
sage: R.<x0,x1,x2,y0,y1,y2> = PolynomialRing(ZZ, 6)
sage: Y = x0*y0 + x1*y1 - x2*y2
sage: Z = x0^2*y0*y1 + x0^2*y2^2 - x0*x1*y1*y2 + x1^2*y2*y1 \
+ x2^2*y2^2 + x2^2*y1^2 + x1^2*y2^2
sage: X = WehlerK3Surface([Z, Y])
sage: X.Gpoly(1, 0)
x0^2*x1^2 + x1^4 - x0*x1^2*x2 + x1^3*x2 + x1^2*x2^2 + x2^4
```

Hpoly (component, i, j)

Return the H polynomials defined as H_{ij}^* .

This polynomial is defined by:

$H_{ij}^* = 2L_i^*L_j^*Q_{kk} - L_i^*L_k^*Q_{jk} - L_j^*L_k^*Q_{ik} + (L_k^*)^2 Q_{ij}^*$ where $\{i, j, k\}$ is some permutation of $(0, 1, 2)$ and * is either y (component=0) or x (component=1).

INPUT:

- component – integer; 0 or 1
- i – integer; 0, 1 or 2
- j – integer; 0, 1 or 2

OUTPUT: polynomial in terms of either y (component=0) or x (component=1)

EXAMPLES:

```
sage: R.<x0,x1,x2,y0,y1,y2> = PolynomialRing(ZZ, 6)
sage: Y = x0*y0 + x1*y1 - x2*y2
sage: Z = x0^2*y0*y1 + x0^2*y2^2 - x0*x1*y1*y2 + x1^2*y2*y1 \
+ x2^2*y2^2 + x2^2*y1^2 + x1^2*y2^2
sage: X = WehlerK3Surface([Z, Y])
sage: X.Hpoly(0, 1, 0)
2*y0*y1^3 + 2*y0*y1*y2^2 - y1*y2^3
```

Lxa (a)

Function will return the L polynomial defining the fiber, given by L_a^x .

This polynomial is defined as:

$$L_a^x = \{(a, y) \in \mathbb{P}^2 \times \mathbb{P}^2 : L(a, y) = 0\}.$$

Notation and definition from: [CS1996]

INPUT:

- a – point in \mathbb{P}^2

OUTPUT: a polynomial representing the fiber

EXAMPLES:

```
sage: PP.<x0,x1,x2,y0,y1,y2> = ProductProjectiveSpaces([2, 2], QQ)
sage: Z = x0^2*y0^2 + 3*x0*x1*y0^2 + x1^2*y0^2 + 4*x0^2*y0*y1 \
+ 3*x0*x1*y0*y1 - 2*x2^2*y0*y1 - \
```

(continues on next page)

(continued from previous page)

```

x0^2*y1^2 + 2*x1^2*y1^2 - x0*x2*y1^2 - 4*x1*x2*y1^2 \
+ 5*x0*x2*y0*y2 - 4*x1*x2*y0*y2 + 7*x0^2*y1*y2 \
+ 4*x1^2*y1*y2 + x0*x1*y2^2 + 3*x2^2*y2^2
sage: Y = x0*y0 + x1*y1 + x2*y2
sage: X = WehlerK3Surface([Z, Y])
sage: T = PP(1, 1, 0, 1, 0, 0)
sage: X.Lxa(T[0])
y0 + y1

```

Lyb (b)

Function will return a fiber by L_b^y .

This polynomial is defined as:

$$L_b^y = \{(x, b) \in \mathbb{P}^2 \times \mathbb{P}^2 : L(x, b) = 0\}.$$

Notation and definition from: [CS1996]

INPUT:

- b – point in projective space

OUTPUT: a polynomial representing the fiber

EXAMPLES:

```

sage: PP.<x0,x1,x2,y0,y1,y2> = ProductProjectiveSpaces([2, 2], QQ)
sage: Z = x0^2*y0^2 + 3*x0*x1*y0^2 + x1^2*y0^2 + 4*x0^2*y0*y1 \
+ 3*x0*x1*y0*y1 \
- 2*x2^2*y0*y1 - x0^2*y1^2 + 2*x1^2*y1^2 - x0*x2*y1^2 - 4*x1*x2*y1^2 \
+ 5*x0*x2*y0*y2 \
- 4*x1*x2*y0*y2 + 7*x0^2*y1*y2 + 4*x1^2*y1*y2 + x0*x1*y2^2 + 3*x2^2*y2^2
sage: Y = x0*y0 + x1*y1 + x2*y2
sage: X = WehlerK3Surface([Z, Y])
sage: T = PP(1, 1, 0, 1, 0, 0)
sage: X.Lyb(T[1])
x0

```

Qxa (a)

Function will return the Q polynomial defining a fiber given by Q_a^x .

This polynomial is defined as:

$$Q_a^x = \{(a, y) \in \mathbb{P}^2 \times \mathbb{P}^2 : Q(a, y) = 0\}.$$

Notation and definition from: [CS1996]

INPUT:

- a – point in \mathbb{P}^2

OUTPUT: a polynomial representing the fiber

EXAMPLES:

```

sage: PP.<x0,x1,x2,y0,y1,y2> = ProductProjectiveSpaces([2, 2], QQ)
sage: Z = x0^2*y0^2 + 3*x0*x1*y0^2 + x1^2*y0^2 + 4*x0^2*y0*y1 + 3*x0*x1*y0*y1 \
- 2*x2^2*y0*y1 - x0^2*y1^2 + 2*x1^2*y1^2 - x0*x2*y1^2 - 4*x1*x2*y1^2 \
+ 5*x0*x2*y0*y2 \

```

(continues on next page)

(continued from previous page)

```

- 4*x1*x2*y0*y2 + 7*x0^2*y1*y2 + 4*x1^2*y1*y2 + x0*x1*y2^2 + 3*x2^2*y2^2
sage: Y = x0*y0 + x1*y1 + x2*y2
sage: X = WehlerK3Surface([Z, Y])
sage: T = PP(1, 1, 0, 1, 0, 0)
sage: X.Qxa(T[0])
5*y0^2 + 7*y0*y1 + y1^2 + 11*y1*y2 + y2^2

```

Qyb (b)

Function will return a fiber by Q_b^y .

This polynomial is defined as:

$$Q_b^y = \{(x, b) \in \mathbb{P}^2 \times \mathbb{P}^2 : Q(x, b) = 0\}.$$

Notation and definition from: [CS1996]

INPUT:

- b – point in projective space

OUTPUT: a polynomial representing the fiber

EXAMPLES:

```

sage: PP.<x0,x1,x2,y0,y1,y2> = ProductProjectiveSpaces([2, 2], QQ)
sage: Z = x0^2*y0^2 + 3*x0*x1*y0^2 + x1^2*y0^2 + 4*x0^2*y0*y1 \
+ 3*x0*x1*y0*y1 - 2*x2^2*y0*y1 - x0^2*y1^2 + 2*x1^2*y1^2 - x0*x2*y1^2 \
- 4*x1*x2*y1^2 + 5*x0*x2*y0*y2 - 4*x1*x2*y0*y2 + 7*x0^2*y1*y2 \
+ 4*x1^2*y1*y2 + x0*x1*y2^2 + 3*x2^2*y2^2
sage: Y = x0*y0 + x1*y1 + x2*y2
sage: X = WehlerK3Surface([Z, Y])
sage: T = PP(1, 1, 0, 1, 0, 0)
sage: X.Qyb(T[1])
x0^2 + 3*x0*x1 + x1^2

```

Ramification_poly (i)

Function will return the Ramification polynomial g^* .

This polynomial is defined by:

$$g^* = \frac{(H_{ij}^*)^2 - 4G_i^*G_j^*}{(L_k^*)^2}.$$

The roots of this polynomial will either be degenerate fibers or fixed points of the involutions σ_x or σ_y for more information, see [CS1996].

INPUT:

- i – integer; either 0 (polynomial in y) or 1 (polynomial in x)

OUTPUT: polynomial in the coordinate ring of the ambient space

EXAMPLES:

```

sage: PP.<x0,x1,x2,y0,y1,y2> = ProductProjectiveSpaces([2, 2], QQ)
sage: Z = (x0^2*y0^2 + 3*x0*x1*y0^2 + x1^2*y0^2 + 4*x0^2*y0*y1 + 3*x0*x1*y0*y1 \
....: - 2*x2^2*y0*y1 - x0^2*y1^2 + 2*x1^2*y1^2 - x0*x2*y1^2 - 4*x1*x2*y1^ \
....: 2
....: + 5*x0*x2*y0*y2 - 4*x1*x2*y0*y2 + 7*x0^2*y1*y2 + 4*x1^2*y1*y2 \
....: + x0*x1*y2^2 + 3*x2^2*y2^2)
sage: Y = x0*y0 + x1*y1 + x2*y2

```

(continues on next page)

(continued from previous page)

```
sage: X = WehlerK3Surface([Z, Y])
sage: X.Ramification_poly(0)
8*y0^5*y1 - 24*y0^4*y1^2 + 48*y0^2*y1^4 - 16*y0*y1^5 + y1^6 + 84*y0^3*y1^2*y2
+ 46*y0^2*y1^3*y2 - 20*y0*y1^4*y2 + 16*y1^5*y2 + 53*y0^4*y2^2 + 56*y0^3*y1*y2^
- 2
- 32*y0^2*y1^2*y2^2 - 80*y0*y1^3*y2^2 - 92*y1^4*y2^2 - 12*y0^2*y1*y2^3
- 168*y0*y1^2*y2^3 - 122*y1^3*y2^3 + 14*y0^2*y2^4 + 8*y0*y1*y2^4 - 112*y1^
- 2*y2^4
+ y2^6
```

Sxa (a)Function will return fiber by S_a^x .

This function is defined as:

$$S_a^x = L_a^x \cap Q_a^x.$$

Notation and definition from: [CS1996]

INPUT:

- a – point in \mathbb{P}^2

OUTPUT: a subscheme representing the fiber

EXAMPLES:

```
sage: PP.<x0,x1,x2,y0,y1,y2> = ProductProjectiveSpaces([2, 2], QQ)
sage: Z = x0^2*y0^2 + 3*x0*x1*y0^2 + x1^2*y0^2 + 4*x0^2*y0*y1 \
+ 3*x0*x1*y0*y1 \
- 2*x2^2*y0*y1 - x0^2*y1^2 + 2*x1^2*y1^2 - x0*x2*y1^2 - 4*x1*x2*y1^2 \
+ 5*x0*x2*y0*y2 \
- 4*x1*x2*y0*y2 + 7*x0^2*y1*y2 + 4*x1^2*y1*y2 + x0*x1*y2^2 + 3*x2^2*y2^2
sage: Y = x0*y0 + x1*y1 + x2*y2
sage: Y = x0*y0 + x1*y1 + x2*y2
sage: X = WehlerK3Surface([Z, Y])
sage: T = PP(1, 1, 0, 1, 0, 0)
sage: X.Sxa(T[0])
Closed subscheme of Projective Space of dimension 2 over Rational Field
- defined by:
y0 + y1,
5*y0^2 + 7*y0*y1 + y1^2 + 11*y1*y2 + y2^2
```

Syb (b)Function will return fiber by S_b^y .

This function is defined by:

$$S_b^y = L_b^y \cap Q_b^y.$$

Notation and definition from: [CS1996]

INPUT:

- b – point in \mathbb{P}^2

OUTPUT: a subscheme representing the fiber

EXAMPLES:

```

sage: PP.<x0,x1,x2,y0,y1,y2> = ProductProjectiveSpaces([2, 2], QQ)
sage: Z = x0^2*y0^2 + 3*x0*x1*y0^2 + x1^2*y0^2 + 4*x0^2*y0*y1 + \
3*x0*x1*y0*y1 - 2*x2^2*y0*y1 - x0^2*y1^2 + 2*x1^2*y1^2 - x0*x2*y1^2 \
- 4*x1*x2*y1^2 + 5*x0*x2*y0*y2 - 4*x1*x2*y0*y2 + 7*x0^2*y1*y2 \
+ 4*x1^2*y1*y2 + x0*x1*y2^2 + 3*x2^2*y2^2
sage: Y = x0 * y0 + x1 * y1 + x2 * y2
sage: X = WehlerK3Surface([Z, Y])
sage: T = PP(1, 1, 0, 1, 0, 0)
sage: X.Syb(T[1])
Closed subscheme of Projective Space of dimension 2 over Rational Field
→defined by:
x0,
x0^2 + 3*x0*x1 + x1^2

```

canonical_height ($P, N, \text{badprimes}=\text{None}, \text{prec}=100$)

Evaluates the canonical height for P with N terms of the series of the local heights.

ALGORITHM:

The sum of the canonical height minus and canonical height plus, for more info see section 4 of [CS1996].

INPUT:

- P – a surface point
 - N – positive integer (number of terms of the series to use)
 - `badprimes` – (optional) list of integer primes (where the surface is degenerate)
 - `prec` – (default: 100) float point or p -adic precision

OUTPUT: a real number

EXAMPLES:

Call-Silverman example:

```

sage: set_verbose(None)
sage: P.<x0,x1,x2,y0,y1,y2> = ProductProjectiveSpaces([2, 2], QQ)
sage: Z = x0^2*y0^2 + 3*x0*x1*y0^2 + x1^2*y0^2 + 4*x0^2*y0*y1 + 3*x0*x1*y0*y1
sage: 
2*x2^2*y0*y1 - x0^2*y1^2 + 2*x1^2*y1^2 - x0*x2*y1^2 - 4*x1*x2*y1^2 + 
5*x0*x2*y0*y2 \
-4*x1*x2*y0*y2 + 7*x0^2*y1*y2 + 4*x1^2*y1*y2 + x0*x1*y2^2 + 3*x2^2*y2^2
sage: Y = x0*y0 + x1*y1 + x2*y2
sage: X = WehlerK3Surface([Z, Y])
sage: P = X(0, 1, 0, 0, 0, 1)
sage: X.canonical_height(P, 4)
0.69826458668659859569990618895

```

```
canonical_height_minus( $P, N$ , badprimes=None, prec=100)
```

Evaluates the canonical height minus function of Call-Silverman for P with N terms of the series of the local heights.

Must be over \mathbf{Z} or \mathbf{Q} .

ALGORITHM:

Sum over the lambda minus heights (local heights) in a convergent series, for more detail see section 7 of [CS1996].

INPUT:

- P – a surface point
 - N – positive integer (number of terms of the series to use)
 - `badprimes` – (optional) list of integer primes (where the surface is degenerate)
 - `prec` – (default: 100) float point or p -adic precision

OUTPUT: a real number

EXAMPLES:

Call-Silverman example:

```

sage: set_verbose(None)
sage: PP.<x0,x1,x2,y0,y1,y2> = ProductProjectiveSpaces([2, 2], QQ)
sage: Z = x0^2*y0^2 + 3*x0*x1*y0^2 + x1^2*y0^2 + 4*x0^2*y0*y1 + \
3*x0*x1*y0*y1 - 2*x2^2*y0*y1 - x0^2*y1^2 + 2*x1^2*y1^2 - x0*x2*y1^2 - \
4*x1*x2*y1^2 + 5*x0*x2*y0*y2 - 4*x1*x2*y0*y2 + 7*x0^2*y1*y2 + 4*x1^2*y1*y2 + \
x0*x1*y2^2 + 3*x2^2*y2^2
sage: Y = x0*y0 + x1*y1 + x2*y2
sage: X = WehlerK3Surface([Z, Y])
sage: P = X([0, 1, 0, 0, 0, 1])
sage: X.canonical_height_minus(P, 4) # long time
0.55073705369676788175590206734

```

```
canonical height plus (P, N, badprimes=None, prec=100)
```

Evaluates the canonical height plus function of Call-Silverman for P with N terms of the series of the local heights.

Must be over Z or Q .

ALGORITHM·

Sum over the lambda plus heights (local heights) in a convergent series, for more detail see section 7 of [CS1996].

INPUT:

- P – a surface point
 - N – positive integer. Number of terms of the series to use
 - `badprimes` – (optional) list of integer primes (where the surface is degenerate)
 - `prec` – (default: 100) float point or p -adic precision

OUTPUT: a real number

EXAMPLES:

Call-Silverman Example:

```

sage: set_verbose(None)
sage: PP.<x0,x1,x2,y0,y1,y2> = ProductProjectiveSpaces([2, 2], QQ)
sage: Z = x0^2*y0^2 + 3*x0*x1*y0^2 + x1^2*y0^2 + 4*x0^2*y0*y1 + \
3*x0*x1*y0*y1 - 2*x2^2*y0*y1 - x0^2*y1^2 + 2*x1^2*y1^2 - x0*x2*y1^2 \
- 4*x1*x2*y1^2 + 5*x0*x2*y0*y2 - 4*x1*x2*y0*y2 + 7*x0^2*y1*y2 + 4*x1^2*y1*y2 \
+ x0*x1*y2^2 + 3*x2^2*y2^2
sage: Y = x0*y0 + x1*y1 + x2*y2
sage: X = WehlerK3Surface([Z, Y])
sage: P = X([0, 1, 0, 0, 0, 1])
sage: X.canonical_height_plus(P, 4) # long time
0.14752753298983071394400412161

```

change_ring(R)

Changes the base ring on which the Wehler K3 Surface is defined.

INPUT:

- R – ring

OUTPUT: K3 Surface defined over input ring

EXAMPLES:

```

sage: PP.<x0,x1,x2,y0,y1,y2> = ProductProjectiveSpaces([2, 2], GF(3))
sage: L = x0*y0 + x1*y1 - x2*y2
sage: Q = x0*x1*y1^2 + x2^2*y0*y2
sage: W = WehlerK3Surface([L, Q])
sage: W.base_ring()
Finite Field of size 3
sage: T = W.change_ring(GF(7))
sage: T.base_ring()
Finite Field of size 7

```

degenerate_fibers()

Return the (rational) degenerate fibers of the surface defined over the base ring, or the fraction field of the base ring if it is not a field.

ALGORITHM:

The criteria for degeneracy by the common vanishing of the polynomials `self.Gpoly(1, 0)`, `self.Gpoly(1, 1)`, `self.Gpoly(1, 2)`, `self.Hpoly(1, 0, 1)`, `self.Hpoly(1, 0, 2)`, `self.Hpoly(1, 1, 2)` (for the first component), is from Proposition 1.4 in the following article: [CS1996].

This function finds the common solution through elimination via Groebner bases by using the `.variety()` function on the three affine charts in each component.

OUTPUT: the output is a list of lists where the elements of lists are points in the appropriate projective space. The first list is the points whose pullback by the projection to the first component (projective space) is dimension greater than 0. The second list is points in the second component

EXAMPLES:

```
sage: R.<x0,x1,x2,y0,y1,y2> = PolynomialRing(ZZ, 6)
sage: Y = x0*y0 + x1*y1 - x2*y2
sage: Z = x0^2*y0*y1 + x0^2*y2^2 - x0*x1*y1*y2 + x1^2*y2*y1 + x2^2*y2^2 \
+ x2^2*y1^2 + x1^2*y2^2
sage: X = WehlerK3Surface([Z, Y])
sage: X.degenerate_fibers()
[], [(1 : 0 : 0)]
```

```
sage: PP.<x0,x1,x2,y0,y1,y2> = ProductProjectiveSpaces([2, 2], QQ)
sage: Z = (x0^2*y0^2 + 3*x0*x1*y0^2 + x1^2*y0^2 + 4*x0^2*y0*y1 + 3*x0*x1*y0*y1 \
....: - 2*x2^2*y0*y1 - x0^2*y1^2 + 2*x1^2*y1^2 - x0*x2*y1^2 - 4*x1*x2*y1^ \
....: + 5*x0*x2*y0*y2 - 4*x1*x2*y0*y2 + 7*x0^2*y1*y2 + 4*x1^2*y1*y2 \
....: + x0*x1*y2^2 + 3*x2^2*y2^2)
sage: Y = x0*y0 + x1*y1 + x2*y2
sage: X = WehlerK3Surface([Z, Y])
sage: X.degenerate_fibers()
[], []
```

```
sage: PP.<x0,x1,x2,y0,y1,y2> = ProductProjectiveSpaces([2, 2], QQ)
sage: R = PP.coordinate_ring()
sage: l = y0*x0 + y1*x1 + (y0 - y1)*x2
sage: q = (y1*y0 + y2^2)*x0^2 + ((y0^2 - y2*y1)*x1 + (y0^2 + (y1^2 - y2^ \
....: 2))*x2)*x0 \
+ (y2*y0 + y1^2)*x1^2 + (y0^2 + (-y1^2 + y2^2))*x2*x1
sage: X = WehlerK3Surface([l,q])
sage: X.degenerate_fibers()
[[-1 : 1 : 1], (0 : 0 : 1)], [(-1 : -1 : 1), (0 : 0 : 1)]
```

degenerate_primes (check=True)

Determine which primes p `self` has degenerate fibers over \mathbb{F}_p .

If `check` is `False`, then may return primes that do not have degenerate fibers. Raises an error if the surface is degenerate. Works only for `ZZ` or `QQ`.

INPUT:

- `check` – boolean (default: `True`); whether the primes are verified

ALGORITHM:

p is a prime of bad reduction if and only if the defining polynomials of `self` plus the G and H polynomials have a common zero. Or stated another way, p is a prime of bad reduction if and only if the radical of the ideal defined by the defining polynomials of `self` plus the G and H polynomials is not (x_0, x_1, \dots, x_N) . This happens if and only if some power of each x_i is not in the ideal defined by the defining polynomials of `self` (with G and H). This last condition is what is checked. The lcm of the coefficients of the monomials x_i in a Groebner basis is computed. This may return extra primes.

OUTPUT: list of primes

EXAMPLES:

```
sage: R.<x0,x1,x2,y0,y1,y2> = PolynomialRing(QQ, 6)
sage: L = y0*x0 + (y1*x1 + y2*x2)
sage: Q = (2*y0^2 + y2*y0 + (2*y1^2 + y2^2))*x0^2 + ((y0^2 + y1*y0 + \
(y1^2 + 2*y2*y1 + y2^2))*x1 + (2*y1^2 + y2*y1 + y2^2)*x2)*x0 + ((2*y0^2 + \
(y1 + 2*y2)*y0 + (2*y1^2 + y2*y1))*x1^2 + ((2*y1 + 2*y2)*y0 + (y1^2 + \
y2*y1 + 2*y2^2))*x2*x1 + (2*y0^2 + y1*y0 + (2*y1^2 + y2^2))*x2^2)
sage: X = WehlerK3Surface([L, Q])
sage: X.degenerate_primes()
[2, 3, 5, 11, 23, 47, 48747691, 111301831]
```

fiber (p , component)

Return the fibers [y (component = 1) or x (Component = 0)] of a point on a K3 Surface.

This will work for nondegenerate fibers only.

For algorithm, see [Hutz2007].

INPUT:

- p – a point in \mathbb{P}^2

OUTPUT: the corresponding fiber (as a list)

EXAMPLES:

```
sage: R.<x0,x1,x2,y0,y1,y2> = PolynomialRing(ZZ, 6)
sage: Y = x0*y0 + x1*y1 - x2*y2
sage: Z = y0^2*x0*x1 + y0^2*x2^2 - y0*y1*x1*x2 + y1^2*x2*x1 + y2^2*x2^2 + \
y2^2*x1^2 + y1^2*x2^2
sage: X = WehlerK3Surface([Z, Y])
sage: Proj = ProjectiveSpace(QQ, 2)
sage: P = Proj([1, 0, 0])
sage: X.fiber(P, 1)
Traceback (most recent call last):
...
TypeError: fiber is degenerate
```

```
sage: P.<x0,x1,x2,y0,y1,y2> = ProductProjectiveSpaces([2, 2], QQ)
sage: Z = x0^2*y0^2 + 3*x0*x1*y0^2 + x1^2*y0^2 + 4*x0^2*y0*y1 + 3*x0*x1*y0*y1 - \
2*x2^2*y0*y1 - x0^2*y1^2 + 2*x1^2*y1^2 - x0*x2*y1^2 - 4*x1*x2*y1^2 + \
5*x0*x2*y0*y2 - \
4*x1*x2*y0*y2 + 7*x0^2*y1*y2 + 4*x1^2*y1*y2 + x0*x1*y2^2 + 3*x2^2*y2^2
sage: Y = x0*y0 + x1*y1 + x2*y2
sage: X = WehlerK3Surface([Z, Y])
sage: Proj = P[0]
sage: T = Proj([0, 0, 1])
sage: X.fiber(T, 1)
[(0 : 0 : 1, 0 : 1 : 0), (0 : 0 : 1, 2 : 0 : 0)]
```

```
sage: PP.<x0,x1,x2,y0,y1,y2> = ProductProjectiveSpaces([2, 2], GF(7))
sage: L = x0*y0 + x1*y1 - 1*x2*y2
sage: Q = ((2*x0^2 + x2*x0 + (2*x1^2 + x2^2))*y0^2
....:      + ((x0^2 + x1*x0 + (x1^2 + 2*x2*x1 + x2^2))*y1
....:      + (2*x1^2 + x2*x1 + x2^2)*y2)*y0
....:      + ((2*x0^2 + (x1 + 2*x2)*x0 + (2*x1^2 + x2*x1))*y1^2
....:      + ((2*x1 + 2*x2)*x0 + (x1^2 + x2*x1 + 2*x2^2))*y2*y1
....:      + (2*x0^2 + x1*x0 + (2*x1^2 + x2^2))*y2^2))
sage: W = WehlerK3Surface([L, Q])
sage: W.fiber([4, 0, 1], 0)
[(0 : 1 : 0 , 4 : 0 : 1), (4 : 0 : 2 , 4 : 0 : 1)]
```

is_degenerate()

Function will return `True` if there is a fiber (over the algebraic closure of the base ring) of dimension greater than 0 and `False` otherwise.

OUTPUT: boolean

EXAMPLES:

```
sage: R.<x0,x1,x2,y0,y1,y2> = PolynomialRing(ZZ, 6)
sage: Y = x0*y0 + x1*y1 - x2*y2
sage: Z = x0^2*y0*y1 + x0^2*y2^2 - x0*x1*y1*y2 + x1^2*y2*y1 + x2^2*y2^2 + \
x2^2*y1^2 + x1^2*y2^2
sage: X = WehlerK3Surface([Z, Y])
sage: X.is_degenerate()
True
```

```
sage: PP.<x0,x1,x2,y0,y1,y2> = ProductProjectiveSpaces([2, 2], QQ)
sage: Z = x0^2*y0^2 + 3*x0*x1*y0^2 + x1^2*y0^2 + 4*x0^2*y0*y1 + 3*x0*x1*y0*y1 - \
2*x2^2*y0*y1 - x0^2*y1^2 + 2*x1^2*y1^2 - x0*x2*y1^2 - 4*x1*x2*y1^2 + \
5*x0*x2*y0*y2 - \
4*x1*x2*y0*y2 + 7*x0^2*y1*y2 + 4*x1^2*y1*y2 + x0*x1*y2^2 + 3*x2^2*y2^2
sage: Y = x0*y0 + x1*y1 + x2*y2
sage: X = WehlerK3Surface([Z, Y])
sage: X.is_degenerate()
False
```

```
sage: PP.<x0,x1,x2,y0,y1,y2> = ProductProjectiveSpaces([2, 2], GF(3))
sage: Z = x0^2*y0^2 + 3*x0*x1*y0^2 + x1^2*y0^2 + 4*x0^2*y0*y1 + 3*x0*x1*y0*y1 - \
2*x2^2*y0*y1 - x0^2*y1^2 + 2*x1^2*y1^2 - x0*x2*y1^2 - 4*x1*x2*y1^2 + \
5*x0*x2*y0*y2 - \
4*x1*x2*y0*y2 + 7*x0^2*y1*y2 + 4*x1^2*y1*y2 + x0*x1*y2^2 + 3*x2^2*y2^2
sage: Y = x0*y0 + x1*y1 + x2*y2
sage: X = WehlerK3Surface([Z, Y])
sage: X.is_degenerate()
True
```

is_isomorphic(*right*)

Check to see if two K3 surfaces have the same defining ideal.

INPUT:

- *right* – the K3 surface to compare to the original

OUTPUT: boolean

EXAMPLES:

```
sage: PP.<x0,x1,x2,y0,y1,y2> = ProductProjectiveSpaces([2, 2], QQ)
sage: Z = x0^2*y0^2 + 3*x0*x1*y0^2 + x1^2*y0^2 + 4*x0^2*y0*y1 + \
3*x0*x1*y0*y1 - 2*x2^2*y0*y1 - x0^2*y1^2 + 2*x1^2*y1^2 - x0*x2*y1^2 \
- 4*x1*x2*y1^2 + 5*x0*x2*y0*y2 - 4*x1*x2*y0*y2 + 7*x0^2*y1*y2 + 4*x1^2*y1*y2 \
+ x0*x1*y2^2 + 3*x2^2*y2^2
sage: Y = x0*y0 + x1*y1 + x2*y2
sage: X = WehlerK3Surface([Z, Y])
sage: W = WehlerK3Surface([Z + Y^2, Y])
sage: X.is_isomorphic(W)
True
```

```
sage: R.<x,y,z,u,v,w> = PolynomialRing(QQ, 6)
sage: L = x*u - y*v
sage: Q = x*y*v^2 + z^2*u*w
sage: W1 = WehlerK3Surface([L, Q])
sage: PP.<x0,x1,x2,y0,y1,y2> = ProductProjectiveSpaces([2, 2], QQ)
sage: L = x0*y0 + x1*y1 + x2*y2
sage: Q = x1^2*y0^2 + 2*x2^2*y0*y1 + x0^2*y1^2 - x0*x1*y2^2
sage: W2 = WehlerK3Surface([L, Q])
sage: W1.is_isomorphic(W2)
False
```

is_smooth()

Function will return the status of the smoothness of the surface.

ALGORITHM:

Checks to confirm that all of the 2x2 minors of the Jacobian generated from the biquadratic and bilinear forms have no common vanishing points.

OUTPUT: boolean**EXAMPLES:**

```
sage: R.<x0,x1,x2,y0,y1,y2> = PolynomialRing(ZZ, 6)
sage: Y = x0*y0 + x1*y1 - x2*y2
sage: Z = x0^2*y0*y1 + x0^2*y2^2 - x0*x1*y1*y2 + x1^2*y2*y1 + \
x2^2*y2^2 + x2^2*y1^2 + x1^2*y2^2
sage: X = WehlerK3Surface([Z, Y])
sage: X.is_smooth()
False
```

```
sage: PP.<x0,x1,x2,y0,y1,y2> = ProductProjectiveSpaces([2, 2], QQ)
sage: Z = x0^2*y0^2 + 3*x0*x1*y0^2 + x1^2*y0^2 + 4*x0^2*y0*y1 + \
3*x0*x1*y0*y1 - 2*x2^2*y0*y1 - x0^2*y1^2 + 2*x1^2*y1^2 - x0*x2*y1^2 \
- 4*x1*x2*y1^2 + 5*x0*x2*y0*y2 - 4*x1*x2*y0*y2 + 7*x0^2*y1*y2 + 4*x1^2*y1*y2 \
+ x0*x1*y2^2 + 3*x2^2*y2^2
sage: Y = x0*y0 + x1*y1 + x2*y2
sage: X = WehlerK3Surface([Z, Y])
sage: X.is_smooth()
True
```

is_symmetric_orbit (orbit)

Check to see if the orbit is symmetric (i.e. if one of the points on the orbit is fixed by ‘sigma_x’ or ‘sigma_y’).

INPUT:

- orbit – a periodic cycle of either psi or phi

OUTPUT: boolean

EXAMPLES:

```
sage: PP.<x0,x1,x2,y0,y1,y2> = ProductProjectiveSpaces([2, 2], GF(7))
sage: Z = x0^2*y0^2 + 3*x0*x1*y0^2 + x1^2*y0^2 + 4*x0^2*y0*y1 + 3*x0*x1*y0*y1
      ↵\
      - 2*x2^2*y0*y1 - x0^2*y1^2 + 2*x1^2*y1^2 - x0*x2*y1^2 - 4*x1*x2*y1^2 +
      ↵5*x0*x2*y0*y2 \
      - 4*x1*x2*y0*y2 + 7*x0^2*y1*y2 + 4*x1^2*y1*y2 + x0*x1*y2^2 + 3*x2^2*y2^2
sage: Y = x0*y0 + x1*y1 + x2*y2
sage: X = WehlerK3Surface([Z, Y])
sage: T = PP([0, 0, 1, 0, 0])
sage: orbit = X.orbit_psi(T, 4)
sage: X.is_symmetric_orbit(orbit)
True
```

```
sage: PP.<x0,x1,x2,y0,y1,y2> = ProductProjectiveSpaces([2, 2], QQ)
sage: L = x0*y0 + x1*y1 + x2*y2
sage: Q = x1^2*y0^2 + 2*x2^2*y0*y1 + x0^2*y1^2 - x0*x1*y2^2
sage: W = WehlerK3Surface([L, Q])
sage: T = W([-1, -1, 1, 1, 0, 1])
sage: Orb = W.orbit_phi(T, 7)
sage: W.is_symmetric_orbit(Orb)
False
```

lambda_minus ($P, v, N, m, n, prec=100$)

Evaluates the local canonical height minus function of Call-Silverman at the place v for P with N terms of the series.

Use $v = 0$ for the Archimedean place. Must be over \mathbf{Z} or \mathbf{Q} .

ALGORITHM:

Sum over local heights using convergent series, for more details, see section 4 of [CS1996].

INPUT:

- P – a projective point
- N – positive integer. number of terms of the series to use
- v – nonnegative integer. a place, use $v = 0$ for the Archimedean place
- m, n – positive integers; we compute the local height for the divisor E_{mn}^+ . These must be indices of nonzero coordinates of the point P .
- $prec$ – (default: 100) float point or p -adic precision

OUTPUT: a real number

EXAMPLES:

```
sage: PP.<x0,x1,x2,y0,y1,y2> = ProductProjectiveSpaces([2, 2], QQ)
sage: Z = x0^2*y0^2 + 3*x0*x1*y0^2 + x1^2*y0^2 + 4*x0^2*y0*y1 + 3*x0*x1*y0*y1
      ↵\
      - 2*x2^2*y0*y1 - x0^2*y1^2 + 2*x1^2*y1^2 - x0*x2*y1^2 - 4*x1*x2*y1^2 +
      ↵5*x0*x2*y0*y2 \
      - 4*x1*x2*y0*y2 + 7*x0^2*y1*y2 + 4*x1^2*y1*y2 + x0*x1*y2^2 + 3*x2^2*y2^2
sage: Y = x0*y0 + x1*y1 + x2*y2
```

(continues on next page)

(continued from previous page)

```
sage: X = WehlerK3Surface([Z, Y])
sage: P = X([0, 0, 1, 1, 0, 0])
sage: X.lambda_minus(P, 2, 20, 2, 0, 200)
-0.18573351672047135037172805779671791488351056677474271893705
```

lambda_plus(*P, v, N, m, n, prec=100*)

Evaluates the local canonical height plus function of Call-Silverman at the place *v* for *P* with *N* terms of the series.

Use *v* = 0 for the archimedean place. Must be over **Z** or **Q**.

ALGORITHM:

Sum over local heights using convergent series, for more details, see section 4 of [CS1996].

INPUT:

- *P* – a surface point
- *N* – positive integer; number of terms of the series to use
- *v* – nonnegative integer; a place, use *v* = 0 for the Archimedean place
- *m, n* – positive integers; we compute the local height for the divisor E_{mn}^+ . These must be indices of nonzero coordinates of the point *P*
- *prec* – (default: 100) float point or *p*-adic precision

OUTPUT: a real number

EXAMPLES:

```
sage: PP.<x0,x1,x2,y0,y1,y2> = ProductProjectiveSpaces([2, 2], QQ)
sage: Z = x0^2*y0^2 + 3*x0*x1*y0^2 + x1^2*y0^2 + 4*x0^2*y0*y1 + 3*x0*x1*y0*y1\
- 2*x2^2*y0*y1 - x0^2*y1^2 + 2*x1^2*y1^2 - x0*x2*y1^2 - 4*x1*x2*y1^2 + \
- 5*x0*x2*y0*y2\
- 4*x1*x2*y0*y2 + 7*x0^2*y1*y2 + 4*x1^2*y1*y2 + x0*x1*y2^2 + 3*x2^2*y2^2
sage: Y = x0*y0 + x1*y1 + x2*y2
sage: X = WehlerK3Surface([Z, Y])
sage: P = X([0, 0, 1, 1, 0, 0])
sage: X.lambda_plus(P, 0, 10, 2, 0)
0.89230705169161608922595928129
```

nth_iterate_phi(*P, n, **kwds*)

Compute the *n*-th iterate for the phi function.

INPUT:

- *P* – a point in $\mathbb{P}^2 \times \mathbb{P}^2$
- *n* – integer

kwds:

- *check* – boolean (default: `True`); checks to see if point is on the surface
- *normalize* – boolean (default: `False`); normalizes the point

OUTPUT: the *n*-th iterate of the point given the phi function (if *n* is positive), or the psi function (if *n* is negative)

EXAMPLES:

```
sage: PP.<x0,x1,x2,y0,y1,y2> = ProductProjectiveSpaces([2, 2], QQ)
sage: L = x0*y0 + x1*y1 + x2*y2
sage: Q = x1^2*y0^2 + 2*x2^2*y0*y1 + x0^2*y1^2 - x0*x1*y2^2
sage: W = WehlerK3Surface([L, Q])
sage: T = W([-1, -1, 1, 1, 0, 1])
sage: W.nth_iterate_phi(T, 7)
(-1 : 0 : 1 , 1 : -2 : 1)
```

```
sage: PP.<x0,x1,x2,y0,y1,y2> = ProductProjectiveSpaces([2, 2], QQ)
sage: L = x0*y0 + x1*y1 + x2*y2
sage: Q = x1^2*y0^2 + 2*x2^2*y0*y1 + x0^2*y1^2 - x0*x1*y2^2
sage: W = WehlerK3Surface([L, Q])
sage: T = W([-1, -1, 1, 1, 0, 1])
sage: W.nth_iterate_phi(T, -7)
(1 : 0 : 1 , -1 : 2 : 1)
```

```
sage: R.<x0,x1,x2,y0,y1,y2>=PolynomialRing(QQ, 6)
sage: L = (-y0 - y1)*x0 + (-y0*x1 - y2*x2)
sage: Q = (-y2*y0 - y1^2)*x0^2 + ((-y0^2 - y2*y0 + (-y2*y1 - y2^2))*x1 + (-y0^2 - y2*y1)*x2)*x0 \
+ ((-y0^2 - y2*y0 - y2^2)*x1^2 + (-y2*y0 - y1^2)*x2*x1 + (-y0^2 + (-y1 - y2)*y0)*x2^2)
sage: X = WehlerK3Surface([L, Q])
sage: P = X([1, 0, -1, 1, -1, 0])
sage: X.nth_iterate_phi(P, 8) == X.nth_iterate_psi(P, 8)
True
```

`nth_iterate_psi` (P, n, kwds)**

Compute the n -th iterate for the psi function.

INPUT:

- P – a point in $\mathbb{P}^2 \times \mathbb{P}^2$
- n – integer

kwds:

- `check` – boolean (default: `True`); checks to see if point is on the surface
- `normalize` – boolean (default: `False`); normalizes the point

OUTPUT: the n -th iterate of the point given the psi function (if n is positive), or the phi function (if n is negative)

EXAMPLES:

```
sage: PP.<x0,x1,x2,y0,y1,y2> = ProductProjectiveSpaces([2, 2], QQ)
sage: L = x0*y0 + x1*y1 + x2*y2
sage: Q = x1^2*y0^2 + 2*x2^2*y0*y1 + x0^2*y1^2 - x0*x1*y2^2
sage: W = WehlerK3Surface([L, Q])
sage: T = W([-1, -1, 1, 1, 0, 1])
sage: W.nth_iterate_psi(T, -7)
(-1 : 0 : 1 , 1 : -2 : 1)
```

```
sage: PP.<x0,x1,x2,y0,y1,y2> = ProductProjectiveSpaces([2, 2], QQ)
sage: L = x0*y0 + x1*y1 + x2*y2
sage: Q = x1^2*y0^2 + 2*x2^2*y0*y1 + x0^2*y1^2 - x0*x1*y2^2
sage: W = WehlerK3Surface([L, Q])
```

(continues on next page)

(continued from previous page)

```
sage: T = W([-1, -1, 1, 1, 0, 1])
sage: W.nth_iterate_psi(T, 7)
(1 : 0 : 1 , -1 : 2 : 1)
```

orbit_phi(*P, N, **kwds*)

Return the orbit of the ϕ function defined by $\phi = \sigma_y \circ \sigma_x$.

This function is defined in [CS1996].

INPUT:

- *P* – point on the K3 surface
- *N* – nonnegative integer or list or tuple of two nonnegative integers

kwds:

- *check* – boolean (default: `True`); checks to see if point is on the surface
- *normalize* – boolean (default: `False`); normalizes the point

OUTPUT: list of points in the orbit

EXAMPLES:

```
sage: PP.<x0,x1,x2,y0,y1,y2> = ProductProjectiveSpaces([2, 2], QQ)
sage: Z = x0^2*y0^2 + 3*x0*x1*y0^2 + x1^2*y0^2 + 4*x0^2*y0*y1 + \
3*x0*x1*y0*y1 - 2*x2^2*y0*y1 - x0^2*y1^2 + 2*x1^2*y1^2 - x0*x2*y1^2 - \
4*x1*x2*y1^2 + 5*x0*x2*y0*y2 - 4*x1*x2*y0*y2 + 7*x0^2*y1*y2 + 4*x1^2*y1*y2 + \
x0*x1*y2^2 + 3*x2^2*y2^2
sage: Y = x0*y0 + x1*y1 + x2*y2
sage: X = WehlerK3Surface([Z, Y])
sage: T = PP(0, 0, 1, 1, 0, 0)
sage: X.orbit_phi(T, 2, normalize = True)
[(0 : 0 : 1 , 1 : 0 : 0), (-1 : 0 : 1 , 0 : 1 : 0), (-12816/6659 : 55413/6659 :
˓→ 1 , 1 : 1/9 : 1)]
sage: X.orbit_phi(T, [2, 3], normalize = True)
[(-12816/6659 : 55413/6659 : 1 , 1 : 1/9 : 1),
(7481279673854775690938629732119966552954626693713001783595660989241 /
˓→ 18550615454277582153932951051931712107449915856862264913424670784695 :
3992260691327218828582255586014718568398539828275296031491644987908 /
˓→ 18550615454277582153932951051931712107449915856862264913424670784695 :
1 , -117756062505511/54767410965117 : -23134047983794359/37466994368025041 :
˓→ 1)]
```

orbit_psi(*P, N, **kwds*)

Return the orbit of the ψ function defined by $\psi = \sigma_x \circ \sigma_y$.

This function is defined in [CS1996].

INPUT:

- *P* – a point on the K3 surface
- *N* – nonnegative integer or list or tuple of two nonnegative integers

kwds:

- *check* – boolean (default: `True`); checks to see if point is on the surface
- *normalize* – boolean (default: `False`); normalizes the point

OUTPUT: list of points in the orbit

EXAMPLES:

```
sage: PP.<x0,x1,x2,y0,y1,y2> = ProductProjectiveSpaces([2, 2], QQ)
sage: Z = x0^2*y0^2 + 3*x0*x1*y0^2 + x1^2*y0^2 + 4*x0^2*y0*y1 + \
3*x0*x1*y0*y1 - 2*x2^2*y0*y1 - x0^2*y1^2 + 2*x1^2*y1^2 - x0*x2*y1^2 - \
4*x1*x2*y1^2 + 5*x0*x2*y0*y2 - 4*x1*x2*y0*y2 + 7*x0^2*y1*y2 + 4*x1^2*y1*y2 + \
x0*x1*y2^2 + 3*x2^2*y2^2
sage: Y = x0*y0 + x1*y1 + x2*y2
sage: X = WehlerK3Surface([Z, Y])
sage: T = X(0, 0, 1, 1, 0, 0)
sage: X.orbit_psi(T, 2, normalize=True)
[(0 : 0 : 1, 1 : 0 : 0), (0 : 0 : 1, 0 : 1 : 0), (-1 : 0 : 1, 1 : 1/9 : 1)]
sage: X.orbit_psi(T, [2, 3], normalize=True)
[(-1 : 0 : 1, 1 : 1/9 : 1),
(-12816/6659 : 55413/6659 : 1, -117756062505511/54767410965117 : - \
23134047983794359/37466994368025041 : 1)]
```

phi (*a*, ***kwds*)

Evaluates the function $\phi = \sigma_y \circ \sigma_x$.

ALGORITHM:

Refer to Section 6: “An algorithm to compute σ_x , σ_y , ϕ , and ψ ” in [CS1996].

For the degenerate case refer to [FH2015].

INPUT:

- *a* – point in $\mathbb{P}^2 \times \mathbb{P}^2$

kwds:

- *check* – boolean (default: `True`); checks to see if point is on the surface
- *normalize* – boolean (default: `True`); normalizes the point

OUTPUT: a point on this surface

EXAMPLES:

```
sage: PP.<x0,x1,x2,y0,y1,y2> = ProductProjectiveSpaces([2, 2], QQ)
sage: Z = x0^2*y0^2 + 3*x0*x1*y0^2 + x1^2*y0^2 + 4*x0^2*y0*y1 + \
3*x0*x1*y0*y1 - 2*x2^2*y0*y1 - x0^2*y1^2 + 2*x1^2*y1^2 - x0*x2*y1^2 - \
4*x1*x2*y1^2 + 5*x0*x2*y0*y2 - 4*x1*x2*y0*y2 + 7*x0^2*y1*y2 + 4*x1^2*y1*y2 + \
x0*x1*y2^2 + 3*x2^2*y2^2
sage: Y = x0*y0 + x1*y1 + x2*y2
sage: X = WehlerK3Surface([Z, Y])
sage: T = PP([0, 0, 1, 1, 0, 0])
sage: X.phi(T)
(-1 : 0 : 1, 0 : 1 : 0)
```

psi (*a*, ***kwds*)

Evaluates the function $\psi = \sigma_x \circ \sigma_y$.

ALGORITHM:

Refer to Section 6: “An algorithm to compute σ_x , σ_y , ϕ , and ψ ” in [CS1996].

For the degenerate case refer to [FH2015].

INPUT:

- α – point in $\mathbb{P}^2 \times \mathbb{P}^2$

kwds:

- check – boolean (default: True); checks to see if point is on the surface
- normalize – boolean (default: True); normalizes the point

OUTPUT: a point on this surface

EXAMPLES:

```
sage: PP.<x0,x1,x2,y0,y1,y2> = ProductProjectiveSpaces([2, 2], QQ)
sage: Z = x0^2*y0^2 + 3*x0*x1*y0^2 + x1^2*y0^2 + 4*x0^2*y0*y1 + \
3*x0*x1*y0*y1 - 2*x2^2*y0*y1 - x0^2*y1^2 + 2*x1^2*y1^2 - x0*x2*y1^2 \
- 4*x1*x2*y1^2 + 5*x0*x2*y0*y2 - 4*x1*x2*y0*y2 + 7*x0^2*y1*y2 + 4*x1^2*y1*y2 \
+ x0*x1*y2^2 + 3*x2^2*y2^2
sage: Y = x0*y0 + x1*y1 + x2*y2
sage: X = WehlerK3Surface([Z, Y])
sage: T = PP([0, 0, 1, 1, 0, 0])
sage: X.psi(T)
(0 : 0 : 1 , 0 : 1 : 0)
```

sigmax(P , **kwds)

Function returns the involution on the Wehler K3 surface induced by the double covers.

In particular, it fixes the projection to the first coordinate and swaps the two points in the fiber, i.e. $(x, y) \rightarrow (x, y')$. Note that in the degenerate case, while we can split fiber into pairs of points, it is not always possible to distinguish them, using this algorithm.

ALGORITHM:

Refer to Section 6: “An algorithm to compute σ_x , σ_y , ϕ , and ψ ” in [CS1996FH2015]. For the degenerate case refer to [FH2015].

INPUT:

- P – a point in $\mathbb{P}^2 \times \mathbb{P}^2$

kwds:

- check – boolean (default: True); checks to see if point is on the surface
- normalize – boolean (default: True); normalizes the point

OUTPUT: a point on the K3 surface

EXAMPLES:

```
sage: PP.<x0,x1,x2,y0,y1,y2> = ProductProjectiveSpaces([2, 2], QQ)
sage: Z = x0^2*y0^2 + 3*x0*x1*y0^2 + x1^2*y0^2 + 4*x0^2*y0*y1 + \
3*x0*x1*y0*y1 - 2*x2^2*y0*y1 - x0^2*y1^2 + 2*x1^2*y1^2 - x0*x2*y1^2 \
- 4*x1*x2*y1^2 + 5*x0*x2*y0*y2 - 4*x1*x2*y0*y2 + 7*x0^2*y1*y2 + \
4*x1^2*y1*y2 + x0*x1*y2^2 + 3*x2^2*y2^2
sage: Y = x0*y0 + x1*y1 + x2*y2
sage: X = WehlerK3Surface([Z, Y])
sage: T = PP(0, 0, 1, 1, 0, 0)
sage: X.sigmax(T)
(0 : 0 : 1 , 0 : 1 : 0)
```

degenerate examples:

```

sage: PP.<x0,x1,x2,y0,y1,y2> = ProductProjectiveSpaces([2, 2], QQ)
sage: l = y0*x0 + y1*x1 + (y0 - y1)*x2
sage: q = (y1*y0)*x0^2 + ((y0^2)*x1 + (y0^2 + (y1^2 - y2^2))*x2)*x0\
+ (y2*y0 + y1^2)*x1^2 + (y0^2 + (-y1^2 + y2^2))*x2*x1
sage: X = WehlerK3Surface([l, q])
sage: X.sigmaX(X([1, 0, 0, 0, 1, -2]))
(1 : 0 : 0 , 0 : 1/2 : 1)
sage: X.sigmaX(X([1, 0, 0, 0, 0, 1]))
(1 : 0 : 0 , 0 : 0 : 1)
sage: X.sigmaX(X([-1, 1, 1, -1, -1, 1]))
(-1 : 1 : 1 , 2 : 2 : 1)
sage: X.sigmaX(X([0, 0, 1, 1, 1, 0]))
(0 : 0 : 1 , 1 : 1 : 0)
sage: X.sigmaX(X([0, 0, 1, 1, 1, 1]))
(0 : 0 : 1 , -1 : -1 : 1)

```

Case where we cannot distinguish the two points:

```

sage: PP.<y0,y1,y2,x0,x1,x2>=ProductProjectiveSpaces([2, 2], GF(3))
sage: l = x0*y0 + x1*y1 + x2*y2
sage: q = (-3*x0^2*y0^2 + 4*x0*x1*y0^2 - 3*x0*x2*y0^2 - 5*x0^2*y0*y1
....: - 190*x0*x1*y0*y1 - 5*x1^2*y0*y1 + 5*x0*x2*y0*y1 + 14*x1*x2*y0*y1
....: + 5*x2^2*y0*y1 - x0^2*y1^2 - 6*x0*x1*y1^2 - 2*x1^2*y1^2
....: + 2*x0*x2*y1^2 - 4*x2^2*y1^2 + 4*x0^2*y0*y2 - x1^2*y0*y2
....: + 3*x0*x2*y0*y2 + 6*x1*x2*y0*y2 - 6*x0^2*y1*y2 - 4*x0*x1*y1*y2
....: - x1^2*y1*y2 + 51*x0*x2*y1*y2 - 7*x1*x2*y1*y2 - 9*x2^2*y1*y2
....: - x0^2*y2^2 - 4*x0*x1*y2^2 + 4*x1^2*y2^2 - x0*x2*y2^2
....: + 13*x1*x2*y2^2 - x2^2*y2^2)
sage: X = WehlerK3Surface([l, q])
sage: P = X([1, 0, 0, 0, 1, 1])
sage: X.sigmaX(X.sigmaX(P))
Traceback (most recent call last):
...
ValueError: cannot distinguish points in the degenerate fiber

```

sigmaY(*P*, ***kwds*)

Return the involution on the Wehler K3 surfaces induced by the double covers.

In particular, it fixes the projection to the second coordinate and swaps the two points in the fiber, i.e. $(x, y) \rightarrow (x', y)$. Note that in the degenerate case, while we can split the fiber into two points, it is not always possible to distinguish them, using this algorithm.

ALGORITHM:

Refer to Section 6: “An algorithm to compute σ_x , σ_y , ϕ , and ψ ” in [CS1996]. For the degenerate case refer to [FH2015].

INPUT:

- P – a point in $\mathbb{P}^2 \times \mathbb{P}^2$

kwds:

- `check` – boolean (default: `True`); checks to see if point is on the surface
- `normalize` – boolean (default: `True`); normalizes the point

OUTPUT:

a point on the K3 surface

EXAMPLES:

```

sage: PP.<x0,x1,x2,y0,y1,y2> = ProductProjectiveSpaces([2, 2], QQ)
sage: Z = x0^2*y0^2 + 3*x0*x1*y0^2 + x1^2*y0^2 + 4*x0^2*y0*y1 + \
3*x0*x1*y0*y1 - 2*x2^2*y0*y1 - x0^2*y1^2 + 2*x1^2*y1^2 - x0*x2*y1^2 \
- 4*x1*x2*y1^2 + 5*x0*x2*y0*y2 - 4*x1*x2*y0*y2 + 7*x0^2*y1*y2 + 4*x1^2*y1*y2 \
+ x0*x1*y2^2 + 3*x2^2*y2^2
sage: Y = x0*y0 + x1*y1 + x2*y2
sage: X = WehlerK3Surface([Z, Y])
sage: T = PP(0, 0, 1, 1, 0, 0)
sage: X.sigmaY(T)
(0 : 0 : 1 , 1 : 0 : 0)

```

degenerate examples:

```

sage: PP.<x0,x1,x2,y0,y1,y2> = ProductProjectiveSpaces([2, 2], QQ)
sage: l = y0*x0 + y1*x1 + (y0 - y1)*x2
sage: q = (y1*y0)*x0^2 + ((y0^2)*x1 + (y0^2 + (y1^2 - y2^2))*x2)*x0 + \
(y2*y0 + y1^2)*x1^2 + (y0^2 + (-y1^2 + y2^2))*x2*x1
sage: X = WehlerK3Surface([l, q])
sage: X.sigmaY(X([1, -1, 0, -1, -1, 1]))
(1/10 : -1/10 : 1 , -1 : -1 : 1)
sage: X.sigmaY(X([0, 0, 1, -1, -1, 1]))
(-4 : 4 : 1 , -1 : -1 : 1)
sage: X.sigmaY(X([1, 2, 0, 0, 0, 1]))
(-3 : -3 : 1 , 0 : 0 : 1)
sage: X.sigmaY(X([1, 1, 1, 0, 0, 1]))
(1 : 0 : 0 , 0 : 0 : 1)

```

Case where we cannot distinguish the two points:

```

sage: PP.<x0,x1,x2,y0,y1,y2>=ProductProjectiveSpaces([2, 2], GF(3))
sage: l = x0*y0 + x1*y1 + x2*y2
sage: q = (-3*x0^2*y0^2 + 4*x0*x1*y0^2 - 3*x0*x2*y0^2 - 5*x0^2*y0*y1 \
....: - 190*x0*x1*y0*y1 - 5*x1^2*y0*y1 + 5*x0*x2*y0*y1 + 14*x1*x2*y0*y1 \
....: + 5*x2^2*y0*y1 - x0^2*y1^2 - 6*x0*x1*y1^2 - 2*x1^2*y1^2 + \
→2*x0*x2*y1^2 \
....: - 4*x2^2*y1^2 + 4*x0^2*y0*y2 - x1^2*y0*y2 + 3*x0*x2*y0*y2 \
....: + 6*x1*x2*y0*y2 - 6*x0^2*y1*y2 - 4*x0*x1*y1*y2 - x1^2*y1*y2 \
....: + 51*x0*x2*y1*y2 - 7*x1*x2*y1*y2 - 9*x2^2*y1*y2 - x0^2*y2^2 \
....: - 4*x0*x1*y2^2 + 4*x1^2*y2^2 - x0*x2*y2^2 + 13*x1*x2*y2^2 - x2^ \
→2*y2^2)
sage: X = WehlerK3Surface([l, q])
sage: P = X([0, 1, 1, 1, 0, 0])
sage: X.sigmaY(X.sigmaY(P))
Traceback (most recent call last):
...
ValueError: cannot distinguish points in the degenerate fiber

```

sage.dynamics.arithmetic_dynamics.wehlerK3.**random_WehlerK3Surface**(PP)

Produces a random K3 surface in $\mathbb{P}^2 \times \mathbb{P}^2$ defined as the intersection of a bilinear and biquadratic form. [Weh1998]

INPUT:

- PP – projective space cartesian product

OUTPUT: *WehlerK3Surface_ring*

EXAMPLES:

```
sage: PP.<x0, x1, x2, y0, y1, y2> = ProductProjectiveSpaces([2, 2], GF(3))
sage: w = random_WehlerK3Surface(PP)
sage: type(w)
<class 'sage.dynamics.arithmetic_dynamics.wehlerK3.WehlerK3Surface_finite_field_
->with_category'>
```

5.6 Dynamical systems on Berkovich space over \mathbf{C}_p .

A dynamical system on Berkovich space over \mathbf{C}_p is determined by a dynamical system on $A^1(\mathbf{C}_p)$ or $P^1(\mathbf{C}_p)$, which naturally induces a dynamical system on affine or projective Berkovich space.

For an exposition of dynamical systems on Berkovich space, see chapter 7 of [Ben2019], or for a more involved exposition, chapter 2 of [BR2010].

AUTHORS:

- Alexander Galarraga (August 14th, 2020): initial implementation

```
class sage.dynamics.arithmetic_dynamics.berkovich_ds.DynamicalSystem_Berkovich(dy-
nam-
i-
cal_sys-
tem,
do-
main)
```

Bases: `Element`

A dynamical system on Berkovich space over \mathbf{C}_p .

A dynamical system on Berkovich space over \mathbf{C}_p is determined by a dynamical system on $A^1(\mathbf{C}_p)$ or $P^1(\mathbf{C}_p)$, which naturally induces a dynamical system on affine or projective Berkovich space.

INPUT:

- `dynamical_system` – a `DynamicalSystem` over affine or projective space. If this input is not defined over a p -adic field, then `domain` MUST be specified.
- `domain` – (optional) affine or projective Berkovich space over \mathbf{C}_p . `domain` must be specified if `dynamical_system` is defined over a number field.
- `ideal` – (optional) an ideal of the `base_ring` of the domain of `dynamical_system`. Used to create `domain` as a Berkovich space backed by a number field more efficiently, see examples.

EXAMPLES:

We can easily create a dynamical system on Berkovich space using a dynamical system on projective space over \mathbf{Q}_p :

```
sage: P.<x,y> = ProjectiveSpace(Qp(3), 1)
sage: f = DynamicalSystem_projective([2*x^2 + 4*y^2, 3*x^2 + 9*y^2])
sage: DynamicalSystem_Berkovich(f)
Dynamical system of Projective Berkovich line over Cp(3) of precision 20
induced by the map
Defn: Defined on coordinates by sending (x : y) to
((2 + O(3^20))*x^2 + (1 + 3 + O(3^20))*y^2
 : (3 + O(3^21))*x^2 + (3^2 + O(3^22))*y^2)
```

Or directly from polynomials:

```
sage: P.<x,y> = ProjectiveSpace(Qp(3),1)
sage: DynamicalSystem_Berkovich([x^2 + y^2, y^2])
Dynamical system of Projective Berkovich line over Cp(3) of precision 20
induced by the map
Defn: Defined on coordinates by sending (x : y) to
(x^2 + y^2 : y^2)
```

DynamicalSystem_Berkovich defaults to projective:

```
sage: R.<x,y> = Qp(3) []
sage: DynamicalSystem_Berkovich([x^2, y^2])
Dynamical system of Projective Berkovich line over Cp(3) of precision 20
induced by the map
Defn: Defined on coordinates by sending (x : y) to
(x^2 : y^2)
```

To create an affine dynamical system on Berkovich space, pass an affine dynamical system to *DynamicalSystem_Berkovich*:

```
sage: A.<z> = AffineSpace(Qp(3), 1)
sage: f = DynamicalSystem_affine(z^2 + 1)
sage: DynamicalSystem_Berkovich(f)
Dynamical system of Affine Berkovich line over Cp(3) of precision 20 induced by ↵
the map
Defn: Defined on coordinates by sending (z) to
(z^2 + 1 + O(3^20))
```

domain can be used to specify the type of dynamical system:

```
sage: A.<z> = AffineSpace(Qp(3), 1)
sage: C = Berkovich_Cp_Affine(3)
sage: DynamicalSystem_Berkovich([z^2 + 1], C)
Dynamical system of Affine Berkovich line over Cp(3) of precision 20 induced by ↵
the map
Defn: Defined on coordinates by sending (z) to
(z^2 + 1 + O(3^20))
```

We can create dynamical systems which act on Berkovich spaces backed by number fields:

```
sage: # needs sage.rings.number_field
sage: R.<z> = QQ[]
sage: A.<a> = NumberField(z^2 + 1)
sage: ideal = A.prime_above(2)
sage: P.<x,y> = ProjectiveSpace(A, 1)
sage: B = Berkovich_Cp_Projective(P, ideal)
sage: DynamicalSystem_Berkovich([x^2 + y^2, 2*a*x*y], B)
Dynamical system of Projective Berkovich line over Cp(2), with base Number Field
in a with defining polynomial z^2 + 1 induced by the map
Defn: Defined on coordinates by sending (x : y) to
(x^2 + y^2 : (2*a)*x*y)
```

We can use the optional parameter `ideal` to create the same dynamical system more efficiently:

```
sage: # needs sage.rings.number_field
sage: R.<z> = QQ[]
sage: A.<a> = NumberField(z^2 + 1)
sage: prime_ideal = A.prime_above(2)
```

(continues on next page)

(continued from previous page)

```
sage: P.<x,y> = ProjectiveSpace(A, 1)
sage: DynamicalSystem_Berkovich([x^2 + y^2, 2*a*x*y], ideal=prime_ideal)
Dynamical system of Projective Berkovich line over Cp(2), with base Number Field
in a with defining polynomial z^2 + 1 induced by the map
Defn: Defined on coordinates by sending (x : y) to
      (x^2 + y^2 : (2*a)*x*y)
```

Creating a map on Berkovich space creates the Berkovich space it acts on:

```
sage: P.<x,y> = ProjectiveSpace(Qp(3), 1)
sage: f = DynamicalSystem_projective([x^2, y^2])
sage: g = DynamicalSystem_Berkovich(f)
sage: B = g.domain(); B
Projective Berkovich line over Cp(3) of precision 20
```

The image of type I point is the image of the center:

```
sage: P.<x,y> = ProjectiveSpace(Qp(3), 1)
sage: F = DynamicalSystem_Berkovich([x^2, y^2])
sage: B = F.domain()
sage: Q1 = B(2)
sage: F(Q1)
Type I point centered at (1 + 3 + O(3^20) : 1 + O(3^20))
```

For type II/III points with no poles in the corresponding disk, the image is the type II/III point corresponding to the image of the disk:

```
sage: Q2 = B(0, 3)
sage: F(Q2)
Type II point centered at (0 : 1 + O(3^20)) of radius 3^2
```

The image of any type II point can be computed:

```
sage: g = DynamicalSystem_projective([x^2 + y^2, x*y])
sage: G = DynamicalSystem_Berkovich(g)
sage: Q3 = B(0, 1)
sage: G(Q3)
Type II point centered at (0 : 1 + O(3^20)) of radius 3^0
```

The image of type III points can be computed has long as the corresponding disk contains no poles of the dynamical system:

```
sage: Q4 = B(1/9, 1.5)
sage: G(Q4)
Type III point centered at (3^-2 + 3^2 + O(3^18) : 1 + O(3^20))
of radius 1.500000000000000
```

Sometimes, however, the poles are contained in an extension of \mathbb{Q}_p that Sage does not support:

```
sage: H = DynamicalSystem_Berkovich([x*y^2, x^3 + 20*y^3])
sage: H(Q4) # not tested
Traceback (most recent call last):
...
NotImplementedError: cannot check if poles lie in type III disk
```

Q_4 , however, does not contain any poles of H (this can be checked using pencil and paper or the number field functionality in Sage). There are two ways around this error: the first and simplest is to have H act on a Berkovich

space backed by a number field:

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: B = Berkovich_Cp_Projective(P, 3)
sage: H = DynamicalSystem_Berkovich([x*y^2, x^3 + 20*y^3], B)
sage: Q4 = B(1/9, 1.5)
sage: H(Q4)
# needs sage.rings.number_field
Type III point centered at (81/14581 : 1) of radius 0.00205761316872428
```

Alternatively, if checking for poles in the disk has been done already, `type_3_pole_check` can be set to `False`:

```
sage: P.<x,y> = ProjectiveSpace(Qp(3), 1)
sage: H = DynamicalSystem_Berkovich([x*y^2, x^3 + 20*y^3])
sage: B = H.domain()
sage: Q4 = B(1/9, 1.5)
sage: H(Q4, False)
Type III point centered at (3^4 + 3^10 + 2*3^11 + 2*3^13 + 2*3^14 +
2*3^15 + 3^17 + 2*3^18 + 2*3^19 + 3^20 + 3^21 + 3^22 + O(3^24) : 1 +
O(3^20)) of radius 0.00205761316872428
```

WARNING: setting `type_3_pole_check` to `False` can lead to mathematically incorrect answers.

`as_scheme_dynamical_system()`

Return this dynamical system as `DynamicalSystem`.

OUTPUT: an affine or projective `DynamicalSystem`

EXAMPLES:

```
sage: P.<x,y> = ProjectiveSpace(Qp(3), 1)
sage: f = DynamicalSystem_Berkovich([x^2 + y^2, x*y])
sage: f.as_scheme_dynamical_system()
Dynamical System of Projective Space of dimension 1 over
3-adic Field with capped relative precision 20
Defn: Defined on coordinates by sending (x : y) to (x^2 + y^2 : x*y)
```

`base_ring()`

The base ring of this dynamical system, that is, the field of definition of the coefficients.

OUTPUT: a field

EXAMPLES:

```
sage: P.<x,y> = ProjectiveSpace(Qp(3), 1)
sage: f = DynamicalSystem_Berkovich([x^2 + y^2, y^2])
sage: f.base_ring()
3-adic Field with capped relative precision 20
```

```
sage: # needs sage.rings.number_field
sage: R.<z> = QQ[]
sage: A.<a> = NumberField(z^3 + 20)
sage: P.<x,y> = ProjectiveSpace(A, 1)
sage: f = DynamicalSystem_Berkovich([x^2, x^2 + y^2], ideal=A.prime_above(2))
sage: f.base_ring()
Number Field in a with defining polynomial z^3 + 20
```

defining_polynomials()

Return the defining polynomials.

OUTPUT: a tuple of polynomials that defines the dynamical system.

EXAMPLES:

```
sage: P.<x,y> = ProjectiveSpace(Qp(3), 1)
sage: f = DynamicalSystem_projective([2*x^2 + 4*y^2, 3*x^2 + 9*y^2])
sage: g = DynamicalSystem_Berkovich(f)
sage: g.defining_polynomials()
((2 + O(3^20))*x^2 + (1 + 3 + O(3^20))*y^2,
 (3 + O(3^21))*x^2 + (3^2 + O(3^22))*y^2)
```

domain()

Return the domain of this dynamical system.

OUTPUT: a Berkovich space over \mathbb{C}_p

EXAMPLES:

```
sage: Q.<x,y> = ProjectiveSpace(Qp(3), 1)
sage: f = DynamicalSystem_projective([3*x^2, 2*y^2])
sage: g = DynamicalSystem_Berkovich(f)
sage: g.domain()
Projective Berkovich line over Cp(3) of precision 20
```

class sage.dynamics.arithmetic_dynamics.berkovich_ds.DynamicalSystem_Berkovich_affine(dynamical_system, domain)

Bases: *DynamicalSystem_Berkovich*

A dynamical system of the affine Berkovich line over \mathbb{C}_p .

INPUT:

- `dynamical_system` – a *DynamicalSystem_affine* of relative dimension 1
- `domain` – (optional) affine or projective Berkovich space over \mathbb{C}_p . If the input to `dynamical_system` is not defined over \mathbb{Q}_p or a finite extension, `domain` must be specified.

EXAMPLES:

A dynamical system of the affine Berkovich line is induced by a dynamical system on \mathbb{Q}_p or an extension of \mathbb{Q}_p :

```
sage: A.<x> = AffineSpace(Qp(5), 1)
sage: f = DynamicalSystem_affine([(x^2 + 1)/x])
sage: DynamicalSystem_Berkovich(f)
Dynamical system of Affine Berkovich line over Cp(5) of precision 20 induced by ↵the map
Defn: Defined on coordinates by sending (x) to ((x^2 + 1 + O(5^20))/x)
```

Dynamical system can be created from a morphism:

```
sage: H = End(A)
sage: phi = H([x + 3])
sage: DynamicalSystem_Berkovich(phi)
Dynamical system of Affine Berkovich line over Cp(5) of precision 20 induced by
the map
Defn: Defined on coordinates by sending (x) to (x + 3 + O(5^20))
```

homogenize (n)

Return the homogenization of this dynamical system.

For dynamical systems of Berkovich space, this is the dynamical system of projective Berkovich space induced by the homogenization of the dynamical system.

INPUT:

- n – tuple of nonnegative integers. If n is an integer, then the two values of the tuple are assumed to be the same

OUTPUT: a dynamical system on projective Berkovich space

EXAMPLES:

```
sage: A.<x> = AffineSpace(Qp(3), 1)
sage: f = DynamicalSystem_affine(1/x)
sage: f = DynamicalSystem_Berkovich(f)
sage: f.homogenize(1)
Dynamical system of Projective Berkovich line over Cp(3) of precision 20
induced by the map
Defn: Defined on coordinates by sending (x0 : x1) to (x1 : x0)
```

```
class sage.dynamics.arithmetic_dynamics.berkovich_ds.DynamicalSystem_Berkovich_projective(
```

1
i
c
t
a
1

Bases: *DynamicalSystem_Berkovich*

A dynamical system on projective Berkovich space over \mathbf{C}_p .

A dynamical system on projective Berkovich space over \mathbf{C}_p is determined by a dynamical system on $A^1(\mathbf{C}_p)$ or $P^1(\mathbf{C}_p)$, which naturally induces a dynamical system on affine or projective Berkovich space.

INPUT:

- *dynamical_system* – a *DynamicalSystem_Projective* of relative dimension 1. If this input is not defined over a *p*-adic field, then *domain* MUST be specified.
- *domain* – (optional) projective Berkovich space over \mathbf{C}_p . If the input to *dynamical_system* is not defined over a *p*-adic field, *domain* must be specified.

EXAMPLES:

We can easily create a dynamical system on Berkovich space using a dynamical system on projective space over \mathbf{Q}_p :

```
sage: P.<x,y> = ProjectiveSpace(Qp(3), 1)
sage: f = DynamicalSystem_projective([1/2*x^2 + x*y + 3*y^2, 3*x^2 + 9*y^2])
sage: DynamicalSystem_Berkovich(f)
```

(continues on next page)

(continued from previous page)

```
Dynamical system of Projective Berkovich line over Cp(3) of precision 20
induced by the map
Defn: Defined on coordinates by sending (x : y) to
      ((2 + 3 + 3^2 + 3^3 + 3^4 + 3^5 + 3^6 + 3^7 + 3^8 + 3^9 + 3^10 + 3^11
      + 3^12 + 3^13 + 3^14 + 3^15 + 3^16 + 3^17 + 3^18 + 3^19 + O(3^20))*x^2
      + x*y + (3 + O(3^21))*y^2 : (3 + O(3^21))*x^2 + (3^2 + O(3^22))*y^2)
```

Or from a morphism:

```
sage: P1.<x,y> = ProjectiveSpace(Qp(3), 1)
sage: H = End(P1)
sage: DynamicalSystem_Berkovich(H([y, x]))
Dynamical system of Projective Berkovich line over Cp(3) of precision 20
induced by the map
Defn: Defined on coordinates by sending (x : y) to (y : x)
```

Or from polynomials:

```
sage: P.<x,y> = ProjectiveSpace(Qp(3), 1)
sage: DynamicalSystem_Berkovich([x^2+y^2, y^2])
Dynamical system of Projective Berkovich line over Cp(3) of precision 20
induced by the map
Defn: Defined on coordinates by sending (x : y) to (x^2 + y^2 : y^2)
```

conjugate (*M, adjugate=False, new_ideal=None*)

Conjugate this dynamical system by *M*, i.e. $M^{-1} \circ f \circ M$.

If possible the new map will be defined over the same space. Otherwise, will try to coerce to the base ring of *M*.

INPUT:

- *M* – a square invertible matrix
- *adjugate* – boolean (default: *False*); also classically called adjoint, takes a square matrix *M* and finds the transpose of its cofactor matrix. Used for conjugation in place of inverse when specified '*True*'. Functionality is the same in projective space.
- *new_ideal* – (optional) an ideal of the *base_ring* of *M*. Used to specify an extension in the case where *M* is not defined over the same number field as this dynamical system.

OUTPUT: a dynamical system

EXAMPLES:

```
sage: P.<x,y> = ProjectiveSpace(Qp(3), 1)
sage: f = DynamicalSystem_projective([x^2 + y^2, 2*y^2])
sage: g = DynamicalSystem_Berkovich(f)
sage: g.conjugate(Matrix([[1, 1], [0, 1]]))
Dynamical system of Projective Berkovich line over Cp(3) of precision 20
induced by the map
Defn: Defined on coordinates by sending (x : y) to
      (x^2 + (2 + O(3^20))*x*y : (2 + O(3^20))*y^2)
```

```
sage: # needs sage.rings.number_field
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem_Berkovich([x^2 + y^2, y^2], ideal=5)
sage: R.<z> = QQ[]
```

(continues on next page)

(continued from previous page)

```
sage: A.<a> = NumberField(z^2 + 1)
sage: conj = Matrix([[1, a], [0, 1]])
sage: f.conjugate(conj)
Dynamical system of Projective Berkovich line over Cp(5), with base NumberField
in a with defining polynomial z^2 + 1 induced by the map
Defn: Defined on coordinates by sending (x : y) to
(x^2 + (2*a)*x*y + (-a)*y^2 : y^2)
```

We can use `new_ideal` to specify a new domain when the base ring of `M` and of this dynamical system are not the same:

```
sage: # needs sage.rings.number_field
sage: ideal = A.ideal(5).factor()[1][0]; ideal
Fractional ideal (2*a + 1)
sage: g = f.conjugate(conj, new_ideal=ideal)
sage: g.domain().ideal()
Fractional ideal (2*a + 1)
```

dehomogenize (n)

Return the map induced by the standard dehomogenization.

The dehomogenization is done at the `n[0]` coordinate of the domain and the `n[1]` coordinate of the codomain.

INPUT:

- `n` – tuple of nonnegative integers; if `n` is an integer, then the two values of the tuple are assumed to be the same

OUTPUT: a dynamical system on affine Berkovich space

EXAMPLES:

```
sage: P.<x,y> = ProjectiveSpace(Qp(3), 1)
sage: f = DynamicalSystem_projective([x^2 + y^2, x*y + y^2])
sage: g = DynamicalSystem_Berkovich(f)
sage: g.dehomogenize(1)
Dynamical system of Affine Berkovich line over Cp(3) of precision 20
induced by the map
Defn: Defined on coordinates by sending (x) to
((x^2 + 1 + O(3^20))/(x + 1 + O(3^20)))
```

normalize_coordinates ()

Normalize the coordinates of the inducing map.

OUTPUT: none

EXAMPLES:

```
sage: P.<x,y> = ProjectiveSpace(Qp(3), 1)
sage: f = DynamicalSystem_Berkovich([2*x^2, 2*y^2])
sage: f.normalize_coordinates(); f
Dynamical system of Projective Berkovich line over Cp(3) of precision 20
induced by the map
Defn: Defined on coordinates by sending (x : y) to (x^2 : y^2)
```

Normalize_coordinates may sometimes fail over p -adic fields:

```
sage: g = DynamicalSystem_Berkovich([2*x^2, x*y])
sage: g.normalize_coordinates() # not tested
Traceback (most recent call last):
...
TypeError: unable to coerce since the denominator is not 1
```

To fix this issue, create a system on Berkovich space backed by a number field:

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: B = Berkovich_Cp_Projective(P, 3)
sage: g = DynamicalSystem_Berkovich([2*x^2, x*y], B)
sage: g.normalize_coordinates(); g
Dynamical system of Projective Berkovich line over Cp(3), with base RationalField
induced by the map
Defn: Defined on coordinates by sending (x : y) to (2*x : y)
```

resultant (*normalize=False*)

Compute the resultant of the defining polynomials of this dynamical system.

If *normalize* is True, then first normalize the coordinate functions with *normalize_coordinates()*.

INPUT:

- *normalize* – boolean (default: False)

OUTPUT: an element of the base ring of this map

EXAMPLES:

```
sage: P.<x,y> = ProjectiveSpace(Qp(3), 1)
sage: f = DynamicalSystem_Berkovich([x^2 + y^2, y^2])
sage: f.resultant()
1 + O(3^20)
```

```
sage: # needs sage.rings.number_field
sage: R.<z> = QQ[]
sage: A.<a> = NumberField(z^3 + 20)
sage: P.<x,y> = ProjectiveSpace(A, 1)
sage: f = DynamicalSystem_Berkovich([2*x^2, x^2 + y^2], ideal=A.prime_above(2))
sage: f.resultant()
4
```

scale_by (*t*)

Scale each coordinate of this dynamical system by a factor of *t*.

INPUT:

- *t* – a ring element

OUTPUT: none

EXAMPLES:

```
sage: P.<x,y> = ProjectiveSpace(Qp(3), 1)
sage: f = DynamicalSystem_Berkovich([x^2, y^2])
sage: f.scale_by(x); f
```

(continues on next page)

(continued from previous page)

```
Dynamical system of Projective Berkovich line over Cp(3) of precision 20
induced by the map
Defn: Defined on coordinates by sending (x : y) to (x^3 : x*y^2)
```

```
sage: # needs sage.rings.number_field
sage: Q.<z> = QQ[]
sage: A.<a> = NumberField(z^3 + 20)
sage: ideal = A.prime_above(3)
sage: P.<x,y> = ProjectiveSpace(A, 1)
sage: B = Berkovich_Cp_Projective(P, ideal)
sage: f = DynamicalSystem_Berkovich([x^2 + y^2, 2*x*y], B)
sage: f.scale_by(2)
Dynamical system of Projective Berkovich line over Cp(3), with base Number
Field in a with defining polynomial z^3 + 20 induced by the map
Defn: Defined on coordinates by sending (x : y) to
(2*x^2 + 2*y^2 : 4*x*y)
```

5.7 Dynamical semigroups

A dynamical semigroup is a finitely generated subsemigroup of the endomorphism ring of a subscheme of projective or affine space.

AUTHORS:

- Dang Phan (August 6th, 2023): initial implementation

```
class sage.dynamics.arithmetic_dynamics.dynamical_semigroup.DynamicalSemigroup(system)
```

Bases: Parent

A dynamical semigroup defined by a multiple dynamical systems on projective or affine space.

INPUT:

- ds_data – list or tuple of dynamical systems or objects that define dynamical systems

OUTPUT:

DynamicalSemigroup_affine if `ds_data` only contains dynamical systems over affine space; and *DynamicalSemigroup_projective* otherwise.

EXAMPLES:

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: DynamicalSemigroup(([x, y], [x^2, y^2]))
Dynamical semigroup over Projective Space of dimension 1 over Rational Field
defined by 2 dynamical systems:
Dynamical System of Projective Space of dimension 1 over Rational Field
Defn: Defined on coordinates by sending (x : y) to (x : y)
Dynamical System of Projective Space of dimension 1 over Rational Field
Defn: Defined on coordinates by sending (x : y) to (x^2 : y^2)
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem([x, y], P)
sage: g = DynamicalSystem([x^2, y^2], P)
sage: DynamicalSemigroup((f, g))
```

(continues on next page)

(continued from previous page)

```
Dynamical semigroup over Projective Space of dimension 1 over Rational Field
defined by 2 dynamical systems:
Dynamical System of Projective Space of dimension 1 over Rational Field
Defn: Defined on coordinates by sending (x : y) to (x : y)
Dynamical System of Projective Space of dimension 1 over Rational Field
Defn: Defined on coordinates by sending (x : y) to (x^2 : y^2)
```

```
sage: A.<x> = AffineSpace(QQ, 1)
sage: f = DynamicalSystem_affine(x, A)
sage: DynamicalSemigroup(f)
Dynamical semigroup over Affine Space of dimension 1 over Rational Field
defined by 1 dynamical system:
Dynamical System of Affine Space of dimension 1 over Rational Field
Defn: Defined on coordinates by sending (x) to (x)
```

```
sage: A.<x> = AffineSpace(QQ, 1)
sage: f = DynamicalSystem(x, A)
sage: g = DynamicalSystem(x^2, A)
sage: DynamicalSemigroup((f, g))
Dynamical semigroup over Affine Space of dimension 1 over Rational Field
defined by 2 dynamical systems:
Dynamical System of Affine Space of dimension 1 over Rational Field
Defn: Defined on coordinates by sending (x) to (x)
Dynamical System of Affine Space of dimension 1 over Rational Field
Defn: Defined on coordinates by sending (x) to (x^2)
```

```
sage: P.<x, y> = ProjectiveSpace(QQ, 1)
sage: X = P.subscheme(x - y)
sage: f = DynamicalSystem_projective([x, y], X)
sage: g = DynamicalSystem_projective([x^2, y^2], X)
sage: DynamicalSemigroup_projective([f, g])
Dynamical semigroup over Closed subscheme of Projective Space of dimension 1
over Rational Field defined by: x - y
defined by 2 dynamical systems:
Dynamical System of Closed subscheme of Projective Space of dimension 1
over Rational Field defined by: x - y
Defn: Defined on coordinates by sending (x : y) to (x : y)
Dynamical System of Closed subscheme of Projective Space of dimension 1
over Rational Field defined by: x - y
Defn: Defined on coordinates by sending (x : y) to (x^2 : y^2)
```

If a dynamical semigroup is built from dynamical systems with different base rings, all systems will be coerced to the largest base ring:

```
sage: P.<x, y> = ProjectiveSpace(QQ, 1)
sage: Q.<z, w> = ProjectiveSpace(RR, 1)
sage: f = DynamicalSystem([x, y], P)
sage: g = DynamicalSystem([z^2, w^2], Q)
sage: DynamicalSemigroup((f, g))
Dynamical semigroup over Projective Space of dimension 1 over
Real Field with 53 bits of precision defined by 2 dynamical systems:
Dynamical System of Projective Space of dimension 1
over Real Field with 53 bits of precision
Defn: Defined on coordinates by sending (x : y) to (x : y)
Dynamical System of Projective Space of dimension 1
```

(continues on next page)

(continued from previous page)

```
over Real Field with 53 bits of precision
Defn: Defined on coordinates by sending (x : y) to (x^2 : y^2)
```

```
sage: A.<x> = AffineSpace(QQ, 1)
sage: B.<y> = AffineSpace(RR, 1)
sage: f = DynamicalSystem(x, A)
sage: g = DynamicalSystem(y^2, B)
sage: DynamicalSemigroup((f, g))
Dynamical semigroup over Affine Space of dimension 1 over
Real Field with 53 bits of precision defined by 2 dynamical systems:
Dynamical System of Affine Space of dimension 1 over
Real Field with 53 bits of precision
Defn: Defined on coordinates by sending (x) to (x)
Dynamical System of Affine Space of dimension 1 over
Real Field with 53 bits of precision
Defn: Defined on coordinates by sending (x) to (x^2)
```

If a dynamical semigroup is built from dynamical systems over number fields, a composite number field is created and all systems will be coerced to it. This composite number field contains all of the initial number fields:

```
sage: # needs sage.rings.number_field
sage: R.<r> = QQ[]
sage: K.<k> = NumberField(r^2 - 2)
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: Q.<x,y> = ProjectiveSpace(K, 1)
sage: f = DynamicalSystem([x, y], P)
sage: g = DynamicalSystem([z^2, w^2], Q)
sage: DynamicalSemigroup((f, g))
Dynamical semigroup over Projective Space of dimension 1 over
Number Field in k with defining polynomial r^2 - 2 defined by 2 dynamical_
systems:
Dynamical System of Projective Space of dimension 1 over
Number Field in k with defining polynomial r^2 - 2
Defn: Defined on coordinates by sending (x : y) to (x : y)
Dynamical System of Projective Space of dimension 1 over
Number Field in k with defining polynomial r^2 - 2
Defn: Defined on coordinates by sending (x : y) to (x^2 : y^2)
```

```
sage: # needs sage.rings.number_field
sage: R.<r> = QQ[]
sage: K.<k> = NumberField(r^2 - 2)
sage: L.<l> = NumberField(r^2 - 3)
sage: P.<x,y> = ProjectiveSpace(K, 1)
sage: Q.<z,w> = ProjectiveSpace(L, 1)
sage: f = DynamicalSystem([x, y], P)
sage: g = DynamicalSystem([z^2, w^2], Q)
sage: DynamicalSemigroup((f, g))
Dynamical semigroup over Projective Space of dimension 1 over
Number Field in kl with defining polynomial r^4 - 10*r^2 + 1
defined by 2 dynamical systems:
Dynamical System of Projective Space of dimension 1 over
Number Field in kl with defining polynomial r^4 - 10*r^2 + 1
Defn: Defined on coordinates by sending (x : y) to (x : y)
Dynamical System of Projective Space of dimension 1 over
Number Field in kl with defining polynomial r^4 - 10*r^2 + 1
Defn: Defined on coordinates by sending (x : y) to (x^2 : y^2)
```

```
sage: # needs sage.rings.number_field
sage: R.<r> = QQ[]
sage: K.<k> = NumberField(r^2 - 2)
sage: L.<l> = NumberField(r^2 - 3)
sage: P.<x> = AffineSpace(K, 1)
sage: Q.<y> = AffineSpace(L, 1)
sage: f = DynamicalSystem(x, P)
sage: g = DynamicalSystem(y^2, Q)
sage: D = DynamicalSemigroup((f, g))
Dynamical semigroup over Affine Space of dimension 1 over
Number Field in k1 with defining polynomial r^4 - 10*r^2 + 1
defined by 2 dynamical systems:
Dynamical System of Affine Space of dimension 1 over
Number Field in k1 with defining polynomial r^4 - 10*r^2 + 1
Defn: Defined on coordinates by sending (x) to (x)
Dynamical System of Affine Space of dimension 1 over
Number Field in k1 with defining polynomial r^4 - 10*r^2 + 1
Defn: Defined on coordinates by sending (x) to (x^2)
```

A dynamical semigroup may contain dynamical systems over function fields:

```
sage: R.<r> = QQ[]
sage: P.<x,y> = ProjectiveSpace(R, 1)
sage: f = DynamicalSystem([r * x, y], P)
sage: g = DynamicalSystem([x, r * y], P)
sage: D = DynamicalSemigroup((f, g))
Dynamical semigroup over Projective Space of dimension 1 over Univariate
Polynomial Ring in r over Rational Field defined by 2 dynamical systems:
Dynamical System of Projective Space of dimension 1 over
Univariate Polynomial Ring in r over Rational Field
Defn: Defined on coordinates by sending (x : y) to (r*x : y)
Dynamical System of Projective Space of dimension 1 over
Univariate Polynomial Ring in r over Rational Field
Defn: Defined on coordinates by sending (x : y) to (x : r*y)
```

```
sage: R.<r> = QQ[]
sage: P.<x,y> = ProjectiveSpace(R, 1)
sage: f = DynamicalSystem([r * x, y], P)
sage: g = DynamicalSystem([x, y], P)
sage: D = DynamicalSemigroup((f, g))
Dynamical semigroup over Projective Space of dimension 1 over Univariate
Polynomial Ring in r over Rational Field defined by 2 dynamical systems:
Dynamical System of Projective Space of dimension 1 over
Univariate Polynomial Ring in r over Rational Field
Defn: Defined on coordinates by sending (x : y) to (r*x : y)
Dynamical System of Projective Space of dimension 1 over
Univariate Polynomial Ring in r over Rational Field
Defn: Defined on coordinates by sending (x : y) to (x : y)
```

```
sage: R.<r,s> = QQ[]
sage: P.<x,y> = ProjectiveSpace(R, 1)
sage: f = DynamicalSystem([r * x, y], P)
sage: g = DynamicalSystem([s * x, y], P)
sage: D = DynamicalSemigroup((f, g))
Dynamical semigroup over Projective Space of dimension 1 over Multivariate
Polynomial Ring in r, s over Rational Field defined by 2 dynamical systems:
Dynamical System of Projective Space of dimension 1 over
```

(continues on next page)

(continued from previous page)

```
Multivariate Polynomial Ring in r, s over Rational Field
Defn: Defined on coordinates by sending (x : y) to (r*x : y)
Dynamical System of Projective Space of dimension 1 over
Multivariate Polynomial Ring in r, s over Rational Field
Defn: Defined on coordinates by sending (x : y) to (s*x : y)
```

```
sage: R.<r,s> = QQ[]
sage: P.<x,y> = ProjectiveSpace(R, 1)
sage: f = DynamicalSystem([r * x, s * y], P)
sage: g = DynamicalSystem([s * x, r * y], P)
sage: DynamicalSemigroup((f, g))
Dynamical semigroup over Projective Space of dimension 1 over
Multivariate Polynomial Ring in r, s over Rational Field
defined by 2 dynamical systems:
Dynamical System of Projective Space of dimension 1 over
Multivariate Polynomial Ring in r, s over Rational Field
Defn: Defined on coordinates by sending (x : y) to (r*x : s*y)
Dynamical System of Projective Space of dimension 1 over
Multivariate Polynomial Ring in r, s over Rational Field
Defn: Defined on coordinates by sending (x : y) to (s*x : r*y)
```

A dynamical semigroup may contain dynamical systems over finite fields:

```
sage: F = FiniteField(5)
sage: P.<x,y> = ProjectiveSpace(F, 1)
sage: DynamicalSemigroup(([x, y], [x^2, y^2]))
Dynamical semigroup over Projective Space of dimension 1 over
Finite Field of size 5 defined by 2 dynamical systems:
Dynamical System of Projective Space of dimension 1 over Finite Field of size 5
Defn: Defined on coordinates by sending (x : y) to (x : y)
Dynamical System of Projective Space of dimension 1 over Finite Field of size 5
Defn: Defined on coordinates by sending (x : y) to (x^2 : y^2)
```

If a dynamical semigroup is built from dynamical systems over both projective and affine spaces, all systems will be homogenized to dynamical systems over projective space:

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: A.<z> = AffineSpace(QQ, 1)
sage: f = DynamicalSystem([x, y], P)
sage: g = DynamicalSystem(z^2, A)
sage: DynamicalSemigroup((f, g))
Dynamical semigroup over Projective Space of dimension 1 over Rational Field
defined by 2 dynamical systems:
Dynamical System of Projective Space of dimension 1 over Rational Field
Defn: Defined on coordinates by sending (x : y) to (x : y)
Dynamical System of Projective Space of dimension 1 over Rational Field
Defn: Defined on coordinates by sending (x : y) to (x^2 : y^2)
```

base_ring()

The base ring of this dynamical semigroup. This is identical to the base ring of all of its defining dynamical system.

OUTPUT: a ring

EXAMPLES:

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSemigroup(([x, y], [x^2, y^2]))
sage: f.base_ring()
Rational Field
```

change_ring(new_ring)

Return a new *DynamicalSemigroup* whose generators are the initial dynamical systems coerced to *new_ring*.

INPUT:

- *new_ring* – a ring

OUTPUT:

A *DynamicalSemigroup* defined by this dynamical semigroup's generators, but coerced to *new_ring*.

EXAMPLES:

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSemigroup(([x, y], [x^2, y^2]))
sage: f.change_ring(RR)
Dynamical semigroup over Projective Space of dimension 1 over
Real Field with 53 bits of precision defined by 2 dynamical systems:
Dynamical System of Projective Space of dimension 1 over
Real Field with 53 bits of precision
Defn: Defined on coordinates by sending (x : y) to (x : y)
Dynamical System of Projective Space of dimension 1 over
Real Field with 53 bits of precision
Defn: Defined on coordinates by sending (x : y) to (x^2 : y^2)
```

codomain()

Return the codomain of the generators of this dynamical semigroup.

OUTPUT: a subscheme of a projective space or affine space

EXAMPLES:

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSemigroup(([x, y], [x^2, y^2]))
sage: f.codomain()
Projective Space of dimension 1 over Rational Field
```

defining_polynomials()

Return the set of polynomials that define the generators of this dynamical semigroup.

OUTPUT: a set of polynomials

EXAMPLES:

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSemigroup(([x, y], [x^2, y^2]))
sage: f.defining_polynomials()
{(x, y), (x^2, y^2)}
```

defining_systems()

Return the generators of this dynamical semigroup.

OUTPUT: a tuple of dynamical systems

EXAMPLES:

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSemigroup(([x, y], [x^2, y^2]))
sage: f.defining_systems()
(Dynamical System of Projective Space of dimension 1 over Rational Field
Defn: Defined on coordinates by sending (x : y) to (x : y),
Dynamical System of Projective Space of dimension 1 over Rational Field
Defn: Defined on coordinates by sending (x : y) to (x^2 : y^2))
```

domain()

Return the domain of the generators of this dynamical semigroup.

OUTPUT: a subscheme of a projective space or affine space

EXAMPLES:

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSemigroup(([x, y], [x^2, y^2]))
sage: f.domain()
Projective Space of dimension 1 over Rational Field
```

nth_iterate(*p, n*)

Return a set of values that results from evaluating this dynamical semigroup on the value *p* a total of *n* times.

INPUT:

- *p* – a value on which dynamical systems can evaluate
- *n* – nonnegative integer

OUTPUT: a set of values

EXAMPLES:

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSemigroup(([x^2, y^2],))
sage: f.nth_iterate(2, 0)
{(2 : 1)}
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSemigroup(([x^2, y^2],))
sage: f.nth_iterate(2, 1)
{(4 : 1)}
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSemigroup(([x^2, y^2],))
sage: f.nth_iterate(2, 2)
{(16 : 1)}
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSemigroup(([x + y, x - y], [x^2, y^2]))
sage: f.nth_iterate(2, 0)
{(2 : 1)}
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSemigroup(([x + y, x - y], [x^2, y^2]))
sage: f.nth_iterate(2, 1)
{(3 : 1), (4 : 1)}
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSemigroup(([x + y, x - y], [x^2, y^2]))
sage: f.nth_iterate(2, 2)
{(5/3 : 1), (2 : 1), (9 : 1), (16 : 1)}
```

orbit(*p, n*)

If *n* is an integer, return $(p, f(p), f^2(p), \dots, f^n(p))$. If *n* is a list or tuple in interval notation $[a, b]$, return $(f^a(p), \dots, f^b(p))$.

INPUT:

- *p* – value on which this dynamical semigroup can be evaluated
- *n* – nonnegative integer or a list or tuple of length 2 describing an interval of the number line containing entirely nonnegative integers

OUTPUT: a tuple of sets of values on the domain of this dynamical semigroup

EXAMPLES:

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: d = DynamicalSemigroup(([x, y], [x^2, y^2]))
sage: d.orbit(2, 0)
({(2 : 1)},)
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: d = DynamicalSemigroup(([x, y], [x^2, y^2]))
sage: d.orbit(2, 1)
({(2 : 1)}, {(2 : 1), (4 : 1)})
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: d = DynamicalSemigroup(([x, y], [x^2, y^2]))
sage: d.orbit(2, 2)
({(2 : 1)}, {(2 : 1), (4 : 1)}, {(2 : 1), (4 : 1), (16 : 1)})
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: d = DynamicalSemigroup(([x, y], [x^2, y^2]))
sage: d.orbit(2, [1, 2])
({(2 : 1), (4 : 1)}, {(2 : 1), (4 : 1), (16 : 1)})
```

specialization(*assignments*)

Return the specialization of the generators of this dynamical semigroup.

INPUT:

- *assignments* – argument for specialization of the generators of this dynamical semigroup

OUTPUT: a dynamical semigroup with the specialization of the generators of this dynamical semigroup

EXAMPLES:

```
sage: R.<r> = QQ[]
sage: P.<x,y> = ProjectiveSpace(R, 1)
sage: f = DynamicalSystem([r * x, y], P)
sage: g = DynamicalSystem([x, r * y], P)
sage: d = DynamicalSemigroup((f, g))
sage: d.specialization({r:2})
Dynamical semigroup over Projective Space of dimension 1 over Rational Field
(continues on next page)
```

(continued from previous page)

```
defined by 2 dynamical systems:
Dynamical System of Projective Space of dimension 1 over Rational Field
Defn: Defined on coordinates by sending (x : y) to (2*x : y)
Dynamical System of Projective Space of dimension 1 over Rational Field
Defn: Defined on coordinates by sending (x : y) to (x : 2*y)
```

```
sage: R.<r> = QQ[]
sage: P.<x,y> = ProjectiveSpace(R, 1)
sage: f = DynamicalSystem([r * x, y], P)
sage: g = DynamicalSystem([x, y], P)
sage: d = DynamicalSemigroup((f, g))
sage: d.specialization({r:2})
Dynamical semigroup over Projective Space of dimension 1 over Rational Field
defined by 2 dynamical systems:
Dynamical System of Projective Space of dimension 1 over Rational Field
Defn: Defined on coordinates by sending (x : y) to (2*x : y)
Dynamical System of Projective Space of dimension 1 over Rational Field
Defn: Defined on coordinates by sending (x : y) to (x : y)
```

```
sage: R.<r,s> = QQ[]
sage: P.<x,y> = ProjectiveSpace(R, 1)
sage: f = DynamicalSystem([r * x, y], P)
sage: g = DynamicalSystem([s * x, y], P)
sage: d = DynamicalSemigroup((f, g))
sage: d.specialization({r:2, s:3})
Dynamical semigroup over Projective Space of dimension 1 over Rational Field
defined by 2 dynamical systems:
Dynamical System of Projective Space of dimension 1 over Rational Field
Defn: Defined on coordinates by sending (x : y) to (2*x : y)
Dynamical System of Projective Space of dimension 1 over Rational Field
Defn: Defined on coordinates by sending (x : y) to (3*x : y)
```

```
sage: R.<r,s> = QQ[]
sage: P.<x,y> = ProjectiveSpace(R, 1)
sage: f = DynamicalSystem([r * x, s * y], P)
sage: g = DynamicalSystem([s * x, r * y], P)
sage: d = DynamicalSemigroup((f, g))
sage: d.specialization({s:3})
Dynamical semigroup over Projective Space of dimension 1 over
Univariate Polynomial Ring in r over Rational Field
defined by 2 dynamical systems:
Dynamical System of Projective Space of dimension 1 over
Univariate Polynomial Ring in r over Rational Field
Defn: Defined on coordinates by sending (x : y) to (r*x : 3*y)
Dynamical System of Projective Space of dimension 1 over
Univariate Polynomial Ring in r over Rational Field
Defn: Defined on coordinates by sending (x : y) to (3*x : r*y)
```

```
class sage.dynamics.arithmetic_dynamics.dynamical_semigroup.DynamicalSemigroup_affine(systems)
```

Bases: *DynamicalSemigroup*

A dynamical semigroup defined by multiple dynamical systems on affine space.

INPUT:

- *ds_data* – list or tuple of dynamical systems or objects that define dynamical systems over affine space

OUTPUT: *DynamicalSemigroup_affine*

EXAMPLES:

```
sage: A.<x> = AffineSpace(QQ, 1)
sage: f = DynamicalSystem(x, A)
sage: g = DynamicalSystem(x^2, A)
sage: DynamicalSemigroup_affine((f, g))
Dynamical semigroup over Affine Space of dimension 1 over Rational Field defined by 2 dynamical systems:
Dynamical System of Affine Space of dimension 1 over Rational Field
Defn: Defined on coordinates by sending (x) to (x)
Dynamical System of Affine Space of dimension 1 over Rational Field
Defn: Defined on coordinates by sending (x) to (x^2)
```

homogenize (*n*)

Return a new *DynamicalSemigroup_projective* with the homogenization at *n* of the generators of this dynamical semigroup.

INPUT:

- *n* – tuple of nonnegative integers; if *n* is an integer, then the two values of the tuple are assumed to be the same

OUTPUT: *DynamicalSemigroup_projective*

EXAMPLES:

```
sage: A.<x> = AffineSpace(QQ, 1)
sage: f = DynamicalSystem(x + 1, A)
sage: g = DynamicalSystem(x^2, A)
sage: d = DynamicalSemigroup((f, g))
sage: d.homogenize(1)
Dynamical semigroup over Projective Space of dimension 1 over Rational Field defined by 2 dynamical systems:
Dynamical System of Projective Space of dimension 1 over Rational Field
Defn: Defined on coordinates by sending (x0 : x1) to (x0 + x1 : x1)
Dynamical System of Projective Space of dimension 1 over Rational Field
Defn: Defined on coordinates by sending (x0 : x1) to (x0^2 : x1^2)
```

```
sage: A.<x> = AffineSpace(QQ, 1)
sage: f = DynamicalSystem(x + 1, A)
sage: g = DynamicalSystem(x^2, A)
sage: d = DynamicalSemigroup((f, g))
sage: d.homogenize((1, 0))
Dynamical semigroup over Projective Space of dimension 1 over Rational Field defined by 2 dynamical systems:
Dynamical System of Projective Space of dimension 1 over Rational Field
Defn: Defined on coordinates by sending (x0 : x1) to (x1 : x0 + x1)
Dynamical System of Projective Space of dimension 1 over Rational Field
Defn: Defined on coordinates by sending (x0 : x1) to (x1^2 : x0^2)
```

class sage.dynamics.arithmetic_dynamics.dynamical_semigroup.**DynamicalSemigroup_affine_field**

Bases: *DynamicalSemigroup_affine*

class sage.dynamics.arithmetic_dynamics.dynamical_semigroup.**DynamicalSemigroup_affine_finite**

Bases: *DynamicalSemigroup_affine_field*

```
class sage.dynamics.arithmetic_dynamics.dynamical_semigroup.DynamicalSemigroup_projective(s)
```

Bases: *DynamicalSemigroup*

A dynamical semigroup defined by a multiple dynamical systems on projective space.

INPUT:

- *ds_data* – list or tuple of dynamical systems or objects that define dynamical systems over projective space

OUTPUT: *DynamicalSemigroup_projective*

EXAMPLES:

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: D = DynamicalSemigroup_projective(([x, y], [x^2, y^2]))
Dynamical semigroup over Projective Space of dimension 1 over
Rational Field defined by 2 dynamical systems:
Dynamical System of Projective Space of dimension 1 over Rational Field
  Defn: Defined on coordinates by sending (x : y) to (x : y)
Dynamical System of Projective Space of dimension 1 over Rational Field
  Defn: Defined on coordinates by sending (x : y) to (x^2 : y^2)
```

dehomogenize (*n*)

Return a new *DynamicalSemigroup_projective* with the dehomogenization at *n* of the generators of this dynamical semigroup.

INPUT:

- *n* – tuple of nonnegative integers; if *n* is an integer, then the two values of the tuple are assumed to be the same

OUTPUT: *DynamicalSemigroup_affine*

EXAMPLES:

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem([x, y], P)
sage: g = DynamicalSystem([x^2, y^2], P)
sage: d = DynamicalSemigroup((f, g))
sage: d.dehomogenize(0)
Dynamical semigroup over Affine Space of dimension 1 over
Rational Field defined by 2 dynamical systems:
Dynamical System of Affine Space of dimension 1 over Rational Field
  Defn: Defined on coordinates by sending (y) to (y)
Dynamical System of Affine Space of dimension 1 over Rational Field
  Defn: Defined on coordinates by sending (y) to (y^2)
```

```
sage: P.<x,y> = ProjectiveSpace(QQ, 1)
sage: f = DynamicalSystem([x, y], P)
sage: g = DynamicalSystem([x^2, y^2], P)
sage: d = DynamicalSemigroup((f, g))
sage: d.dehomogenize(1)
Dynamical semigroup over Affine Space of dimension 1 over
Rational Field defined by 2 dynamical systems:
Dynamical System of Affine Space of dimension 1 over Rational Field
  Defn: Defined on coordinates by sending (x) to (x)
Dynamical System of Affine Space of dimension 1 over Rational Field
  Defn: Defined on coordinates by sending (x) to (x^2)
```

```
class sage.dynamics.arithmetic_dynamics.dynamical_semigroup.DynamicalSemigroup_projective
    # ... 
Bases: DynamicalSemigroup_projective

class sage.dynamics.arithmetic_dynamics.dynamical_semigroup.DynamicalSemigroup_projective_field
    # ... 
Bases: DynamicalSemigroup_projective_field
```

See also

- sage.schemes.affine.affine_morphism
- sage.schemes.projective.projective_morphism
- sage.schemes.product_projective.morphism

**CHAPTER
SIX**

INDICES AND TABLES

- [Index](#)
- [Module Index](#)
- [Search Page](#)

PYTHON MODULE INDEX

d

```
sage.dynamics.arithmetic_dynam-
    ics.affine_ds, 110
sage.dynamics.arithmetic_dynam-
    ics.berkovich_ds, 228
sage.dynamics.arithmetic_dynamics.dy-
    namical_semigroup, 237
sage.dynamics.arithmetic_dynam-
    ics.generic_ds, 103
sage.dynamics.arithmetic_dynam-
    ics.product_projective_ds, 204
sage.dynamics.arithmetic_dynamics.pro-
    jective_ds, 121
sage.dynamics.arithmetic_dynam-
    ics.wehlerK3, 207
sage.dynamics.cellular_automata.cata-
    log, 1
sage.dynamics.cellular_automata.ele-
    mentary, 1
sage.dynamics.cellular_automata.glca, 8
sage.dynamics.cellular_automata.soli-
    tons, 12
sage.dynamics.complex_dynamics.man-
    del_julia, 29
sage.dynamics.finite_dynamical_system,
    35
```

s

```
sage.sandpiles.sandpile, 49
```


INDEX

A

add_random() (*sage.sandpiles.sandpile.SandpileConfig method*), 76
add_random() (*sage.sandpiles.sandpile.SandpileDivisor method*), 84
admissible_partitions() (*in module sage.sandpiles.sandpile*), 96
affine_preperiodic_model() (*sage.dynamics.arithmetic_dynamics.projective_ds.DynamicalSystem_projective method*), 126
all_k_config() (*sage.sandpiles.sandpile.Sandpile method*), 54
all_k_div() (*sage.sandpiles.sandpile.Sandpile method*), 54
all_minimal_models() (*sage.dynamics.arithmetic_dynamics.projective_ds.DynamicalSystem_projective method*), 128
all_periodic_points() (*sage.dynamics.arithmetic_dynamics.projective_ds.DynamicalSystem_projective_field method*), 181
all_periodic_points() (*sage.dynamics.arithmetic_dynamics.projective_ds.DynamicalSystem_projective_finite_field method*), 199
all_preperiodic_points() (*sage.dynamics.arithmetic_dynamics.projective_ds.DynamicalSystem_projective_field method*), 183
all_rational_preimages() (*sage.dynamics.arithmetic_dynamics.projective_ds.DynamicalSystem_projective_field method*), 185
arakelov_zhang_pairing() (*sage.dynamics.arithmetic_dynamics.projective_ds.DynamicalSystem_projective method*), 129
as_scheme_dynamical_system() (*sage.dynamics.arithmetic_dynamics.berkovich_ds.DynamicalSystem_Berkovich method*), 231
as_scheme_morphism() (*sage.dynamics.arithmetic_dynamics.generic_ds.DynamicalSystem method*), 105
automorphism_group() (*sage.dynamics.arithmetic_dynamics.projective_ds.DynamicalSystem_projective method*), 131
automorphism_group() (*sage.dynamics.arith-*

metic_dynamics.projective_ds.DynamicalSystem_projective_finite_field method), 199

avalanche_polynomial() (*sage.sandpiles.sandpile.Sandpile method*), 55
aztec_sandpile() (*in module sage.sandpiles.sandpile*), 97

B

base_ring() (*sage.dynamics.arithmetic_dynamics.berkovich_ds.DynamicalSystem_Berkovich method*), 231
base_ring() (*sage.dynamics.arithmetic_dynamics.dynamical_semigroup.DynamicalSemigroup method*), 241
betti() (*sage.sandpiles.sandpile.Sandpile method*), 55
betti() (*sage.sandpiles.sandpile.SandpileDivisor method*), 84
betti_complexes() (*sage.sandpiles.sandpile.Sandpile method*), 56
burning_config() (*sage.sandpiles.sandpile.Sandpile method*), 56
burning_script() (*sage.sandpiles.sandpile.Sandpile method*), 57
burst_size() (*sage.sandpiles.sandpile.SandpileConfig method*), 77

C

canonical_divisor() (*sage.sandpiles.sandpile.Sandpile method*), 58
canonical_height() (*sage.dynamics.arithmetic_dynamics.projective_ds.DynamicalSystem_projective method*), 133
canonical_height() (*sage.dynamics.arithmetic_dynamics.wehlerK3.WehlerK3Surface_ring method*), 213
canonical_height_minus() (*sage.dynamics.arithmetic_dynamics.wehlerK3.WehlerK3Surface_ring method*), 213
canonical_height_plus() (*sage.dynamics.arithmetic_dynamics.wehlerK3.WehlerK3Surface_ring method*), 214

cardinality() (*sage.dynamics.arithmetic_dynamics.wehlerK3.WehlerK3Surface_finite_field method*), 208
change_ring() (*sage.dynamics.arithmetic_dynamics.dynamical_semigroup.DynamicalSemigroup method*), 242
change_ring() (*sage.dynamics.arithmetic_dynamics.generic_ds.DynamicalSystem* method), 105
change_ring() (*sage.dynamics.arithmetic_dynamics.wehlerK3.WehlerK3Surface_ring method*), 215
codomain() (*sage.dynamics.arithmetic_dynamics.dynamical_semigroup.DynamicalSemigroup method*), 242
conjugate() (*sage.dynamics.arithmetic_dynamics.affine_ds.DynamicalSystem_affine* method), 112
conjugate() (*sage.dynamics.arithmetic_dynamics.berkovich_ds.DynamicalSystem_Berkovich_projective* method), 234
conjugate() (*sage.dynamics.arithmetic_dynamics.projective_ds.DynamicalSystem_projective* method), 135
conjugating_set() (*sage.dynamics.arithmetic_dynamics.projective_ds.DynamicalSystem_projective_field* method), 186
connected_rational_component() (*sage.dynamics.arithmetic_dynamics.projective_ds.DynamicalSystem_projective_field* method), 189
critical_height() (*sage.dynamics.arithmetic_dynamics.projective_ds.DynamicalSystem_projective* method), 136
critical_point_portrait() (*sage.dynamics.arithmetic_dynamics.projective_ds.DynamicalSystem_projective* method), 137
critical_points() (*sage.dynamics.arithmetic_dynamics.projective_ds.DynamicalSystem_projective* method), 138
critical_subscheme() (*sage.dynamics.arithmetic_dynamics.projective_ds.DynamicalSystem_Berkovich_projective* method), 139
cyclegraph() (*sage.dynamics.arithmetic_dynamics.affine_ds.DynamicalSystem_affine_finite_field* method), 120
cyclegraph() (*sage.dynamics.arithmetic_dynamics.product_projective_ds.DynamicalSystem_product_projective_finite_field* method), 206
cyclegraph() (*sage.dynamics.arithmetic_dynamics.projective_ds.DynamicalSystem_projective_finite_field* method), 201
cycles() (*sage.dynamics.finite_dynamical_system.FiniteDynamicalSystem* method), 42
cycles() (*sage.dynamics.finite_dynamical_system.InvertibleFiniteDynamicalSystem* method), 47

D

Dcomplex() (*sage.sandpiles.sandpile.SandpileDivisor* method), 84
defining_polynomials() (*sage.dynamics.arithmetic_dynamics.berkovich_ds.DynamicalSystem_Berkovich* method), 231
defining_polynomials() (*sage.dynamics.arithmetic_dynamics.dynamical_semigroup.DynamicalSemigroup* method), 242
defining_systems() (*sage.dynamics.arithmetic_dynamics.dynamical_semigroup.DynamicalSemigroup* method), 242
deg() (*sage.sandpiles.sandpile.SandpileConfig* method), 77
deg() (*sage.sandpiles.sandpile.SandpileDivisor* method), 85
degenerate_fibers() (*sage.dynamics.arithmetic_dynamics.wehlerK3.WehlerK3Surface_ring* method), 215
degenerate_primes() (*sage.dynamics.arithmetic_dynamics.wehlerK3.WehlerK3Surface_ring* method), 216
degree() (*sage.dynamics.arithmetic_dynamics.affine_ds.DynamicalSystem_affine* method), 113
degree_sequence() (*sage.dynamics.arithmetic_dynamics.projective_ds.DynamicalSystem_projective* method), 140
dehomogenize() (*sage.dynamics.arithmetic_dynamics.berkovich_ds.DynamicalSystem_Berkovich_projective* method), 235
dehomogenize() (*sage.dynamics.arithmetic_dynamics.dynamical_semigroup.DynamicalSemigroup_projective* method), 247
dehomogenize() (*sage.dynamics.arithmetic_dynamics.projective_ds.DynamicalSystem_projective* method), 140
dict() (*sage.sandpiles.sandpile.Sandpile* method), 58
DiscreteDynamicalSystem (*class in sage.dynamics.finite_dynamical_system*), 35
domain() (*sage.dynamics.arithmetic_dynamics.berkovich_ds.DynamicalSystem_Berkovich* method), 232
domain() (*sage.dynamics.arithmetic_dynamics.dynamical_semigroup.DynamicalSemigroup* method), 243
dualize() (*sage.sandpiles.sandpile.SandpileConfig* method), 77
dualize() (*sage.sandpiles.sandpile.SandpileDivisor* method), 85
dynamical_degree() (*sage.dynamics.arithmetic_dynamics.projective_ds.DynamicalSystem_projective* method), 140

tive method), 141

DynamicalSemigroup (*class in sage.dynamics.arithmetic_dynamics.dynamical_semigroup*), 237

DynamicalSemigroup_affine (*class in sage.dynamics.arithmetic_dynamics.dynamical_semigroup*), 245

DynamicalSemigroup_affine_field (*class in sage.dynamics.arithmetic_dynamics.dynamical_semigroup*), 246

DynamicalSemigroup_affine_finite_field (*class in sage.dynamics.arithmetic_dynamics.dynamical_semigroup*), 246

DynamicalSemigroup_projective (*class in sage.dynamics.arithmetic_dynamics.dynamical_semigroup*), 246

DynamicalSemigroup_projective_field (*class in sage.dynamics.arithmetic_dynamics.dynamical_semigroup*), 247

DynamicalSemigroup_projective_fi-nite_field (*class in sage.dynamics.arithmetic_dynamics.dynamical_semigroup*), 248

DynamicalSystem (*class in sage.dynamics.arithmetic_dynamics.generic_ds*), 103

DynamicalSystem_affine (*class in sage.dynamics.arithmetic_dynamics.affine_ds*), 110

DynamicalSystem_affine_field (*class in sage.dynamics.arithmetic_dynamics.affine_ds*), 119

DynamicalSystem_affine_finite_field (*class in sage.dynamics.arithmetic_dynamics.affine_ds*), 120

DynamicalSystem_Berkovich (*class in sage.dynamics.arithmetic_dynamics.berkovich_ds*), 228

DynamicalSystem_Berkovich_affine (*class in sage.dynamics.arithmetic_dynamics.berkovich_ds*), 232

DynamicalSystem_Berkovich_projective (*class in sage.dynamics.arithmetic_dynamics.berkovich_ds*), 233

DynamicalSystem_product_projective (*class in sage.dynamics.arithmetic_dynamics.product_projective_ds*), 204

DynamicalSystem_product_projective_field (*class in sage.dynamics.arithmetic_dynamics.product_projective_ds*), 206

DynamicalSystem_product_projective_fi-nite_field (*class in sage.dynamics.arithmetic_dynamics.product_projective_ds*), 206

DynamicalSystem_projective (*class in sage.dynamics.arithmetic_dynamics.projective_ds*), 122

DynamicalSystem_projective_field (*class in sage.dynamics.arithmetic_dynamics.projective_ds*), 181

DynamicalSystem_projective_fi-

nite_field (*class in sage.dynamics.arith-metic_dynamics.projective_ds*), 199

dynatomic_polynomial () (*sage.dynamics.arith-metic_dynamics.affine_ds.DynamicalSys-tem_affine method*), 113

dynatomic_polynomial () (*sage.dynamics.arith-metic_dynamics.projective_ds.DynamicalSys-tem_projective method*), 141

E

effective_div () (*sage.sandpiles.sandpile.Sandpile-Divisor method*), 85

ElementaryCellularAutomata (*class in sage.dynamics.cellular_automata.elementary*), 1

equivalent_recurrent () (*sage.sandpiles.sand-pile.SandpileConfig method*), 78

equivalent_superstable () (*sage.sandpiles.sand-pile.SandpileConfig method*), 78

evolution () (*sage.dynamics.finite_dynamical_sys-tem.DiscreteDynamicalSystem method*), 38

evolution_power () (*sage.dynamics.finite_dynamical_system.DiscreteDynamicalSystem method*), 39

evolution_power () (*sage.dynamics.finite_dynam-ical_system.InvertibleDiscreteDynamicalSystem method*), 44

evolve () (*sage.dynamics.cellular_automata.elemen-tary.ElementaryCellularAutomata method*), 5

evolve () (*sage.dynamics.cellular_au-tomata.glca.GraftalLaceCellularAutomata method*), 9

evolve () (*sage.dynamics.cellular_automata.solitons.Pe-riodicSolitonCellularAutomata method*), 14

evolve () (*sage.dynamics.cellular_automata.sol-i-tions.SolitonCellularAutomata method*), 20

external_ray () (*in module sage.dynamics.com-plex_dynamics.mandel_julia*), 29

F

fiber () (*sage.dynamics.arithmetic_dynam-ics.wehlerK3.WehlerK3Surface_ring method*), 217

field_of_definition_critical () (*sage.dy-namics.arithmetic_dynamics.generic_ds.DynamicalSystem method*), 106

field_of_definition_periodic () (*sage.dy-namics.arithmetic_dynamics.generic_ds.DynamicalSystem method*), 107

field_of_definition_preimage () (*sage.dy-namics.arithmetic_dynamics.generic_ds.DynamicalSystem method*), 108

FiniteDynamicalSystem (*class in sage.dynamics.fi-nite_dynamical_system*), 41

G
 genus () (*sage.sandpiles.Sandpile method*), 58
 glue_graphs () (*in module sage.sandpiles.sandpile*), 98
 Gpoly () (*sage.dynamics.arithmetic_dynamics.wehlerK3.WehlerK3Surface_ring method*), 208
GraftalLaceCellularAutomata (*class in sage.dynamics.cellular_automata.glca*), 8
 green_function () (*sage.dynamics.arithmetic_dynamics.projective_ds.DynamicalSystem_projective method*), 144
 groebner () (*sage.sandpiles.sandpile.Sandpile method*), 59
 ground_set () (*sage.dynamics.finite_dynamical_system.DiscreteDynamicalSystem method*), 39
 group_gens () (*sage.sandpiles.sandpile.Sandpile method*), 59
 group_order () (*sage.sandpiles.sandpile.Sandpile method*), 59

H
 h_vector () (*sage.sandpiles.sandpile.Sandpile method*), 60
 height_difference_bound () (*sage.dynamics.arithmetic_dynamics.projective_ds.DynamicalSystem_projective method*), 145
 help () (*sage.sandpiles.sandpile.Sandpile static method*), 60
 help () (*sage.sandpiles.sandpile.SandpileConfig static method*), 80
 help () (*sage.sandpiles.sandpile.SandpileDivisor static method*), 87
 hilbert_function () (*sage.sandpiles.sandpile.Sandpile method*), 61
 homogenize () (*sage.dynamics.arithmetic_dynamics.affine_ds.DynamicalSystem_affine method*), 114
 homogenize () (*sage.dynamics.arithmetic_dynamics.berkovich_ds.DynamicalSys-*

tem_Berkovich_affine method), 233
 homogenize () (*sage.dynamics.arithmetic_dynamics.dynamical_semigroup.DynamicalSemigroup_affine method*), 246
 Hpoly () (*sage.dynamics.arithmetic_dynamics.wehlerK3.WehlerK3Surface_ring method*), 209

I
 ideal () (*sage.sandpiles.sandpile.Sandpile method*), 61
 identity () (*sage.sandpiles.sandpile.Sandpile method*), 62
 in_degree () (*sage.sandpiles.sandpile.Sandpile method*), 62
 invariant_factors () (*sage.sandpiles.sandpile.Sandpile method*), 62
 inverse_evolution () (*sage.dynamics.finite_dynamical_system.InvertibleDiscreteDynamicalSystem method*), 44
 inverse_evolution_default () (*sage.dynamics.finite_dynamical_system.InvertibleDiscreteDynamicalSystem method*), 45
InvertibleDiscreteDynamicalSystem (*class in sage.dynamics.finite_dynamical_system*), 43
InvertibleFiniteDynamicalSystem (*class in sage.dynamics.finite_dynamical_system*), 46
 is_alive () (*sage.sandpiles.sandpile.SandpileDivisor method*), 88
 is_chebyshev () (*sage.dynamics.arithmetic_dynamics.projective_ds.DynamicalSystem_projective method*), 148
 is_conjugate () (*sage.dynamics.arithmetic_dynamics.projective_ds.DynamicalSystem_projective_field method*), 190
 is_degenerate () (*sage.dynamics.arithmetic_dynamics.wehlerK3.WehlerK3Surface_ring method*), 218
 is_dynamical_belyi_map () (*sage.dynamics.arithmetic_dynamics.projective_ds.DynamicalSystem_projective method*), 148
 is_homomesic () (*sage.dynamics.finite_dynamical_system.DiscreteDynamicalSystem method*), 39
 is_invariant () (*sage.dynamics.finite_dynamical_system.FiniteDynamicalSystem method*), 42
 is_isomorphic () (*sage.dynamics.arithmetic_dynamics.wehlerK3.WehlerK3Surface_ring method*), 218
 is_Lattes () (*sage.dynamics.arithmetic_dynamics.projective_ds.DynamicalSystem_projective method*), 146
 is_linearly_equivalent () (*sage.sandpiles.sandpile.SandpileDivisor method*), 88

i
 is_newton() (*sage.dynamics.arithmetic_dynamics.projective_ds.DynamicalSystem_projective_field method*), 192
 is_PGL_minimal() (*sage.dynamics.arithmetic_dynamics.projective_ds.DynamicalSystem_projective method*), 147
 is_polynomial() (*sage.dynamics.arithmetic_dynamics.projective_ds.DynamicalSystem_projective_field method*), 192
 is_postcritically_finite() (*sage.dynamics.arithmetic_dynamics.projective_ds.DynamicalSystem_projective method*), 149
 is_postcritically_finite() (*sage.dynamics.arithmetic_dynamics.projective_ds.DynamicalSystem_projective_finite_field method*), 202
 is_q_reduced() (*sage.sandpiles.sandpile.SandpileDivisor method*), 89
 is_recurrent() (*sage.sandpiles.sandpile.SandpileConfig method*), 80
 is_smooth() (*sage.dynamics.arithmetic_dynamics.wehlerK3.WehlerK3Surface_ring method*), 219
 is_stable() (*sage.sandpiles.sandpile.SandpileConfig method*), 81
 is_superstable() (*sage.sandpiles.sandpile.SandpileConfig method*), 81
 is_symmetric() (*sage.sandpiles.sandpile.SandpileConfig method*), 81
 is_symmetric() (*sage.sandpiles.sandpile.SandpileDivisor method*), 89
 is_symmetric_orbit() (*sage.dynamics.arithmetic_dynamics.wehlerK3.WehlerK3Surface_ring method*), 219
 is_undirected() (*sage.sandpiles.sandpile.Sandpile method*), 63
 is_weierstrass_pt() (*sage.sandpiles.sandpile.SandpileDivisor method*), 90

J
 jacobian_representatives() (*sage.sandpiles.sandpile.Sandpile method*), 63

K
 kneading_sequence() (*in module sage.dynamics.complex_dynamics.mandel_julia*), 32

L
 lambda_minus() (*sage.dynamics.arithmetic_dynamics.wehlerK3.WehlerK3Surface_ring method*), 220

lambda_plus() (*sage.dynamics.arithmetic_dynamics.wehlerK3.WehlerK3Surface_ring method*), 221
 laplacian() (*sage.sandpiles.sandpile.Sandpile method*), 64
 latex_state_evolution() (*sage.dynamics.cellular_automata.solitons.SolitonCellularAutomata method*), 22
 latex_states() (*sage.dynamics.cellular_automata.solitons.SolitonCellularAutomata method*), 22
 Lattes_to_curve() (*sage.dynamics.arithmetic_dynamics.projective_ds.DynamicalSystem_projective method*), 124
 lift_to_rational_periodic() (*sage.dynamics.arithmetic_dynamics.projective_ds.DynamicalSystem_projective_field method*), 193
 Lxa() (*sage.dynamics.arithmetic_dynamics.wehlerK3.WehlerK3Surface_ring method*), 209
 Lyb() (*sage.dynamics.arithmetic_dynamics.wehlerK3.WehlerK3Surface_ring method*), 210

M
 mandelbrot_plot() (*in module sage.dynamics.complex_dynamics.mandel_julia*), 33
 markov_chain() (*sage.sandpiles.sandpile.Sandpile method*), 64
 max_stable() (*sage.sandpiles.sandpile.Sandpile method*), 65
 max_stable_div() (*sage.sandpiles.sandpile.Sandpile method*), 65
 max_superstables() (*sage.sandpiles.sandpile.Sandpile method*), 66
 min_cycles() (*in module sage.sandpiles.sandpile*), 99
 min_recurrents() (*sage.sandpiles.sandpile.Sandpile method*), 66
 minimal_model() (*sage.dynamics.arithmetic_dynamics.projective_ds.DynamicalSystem_projective method*), 151
 module
 sage.dynamics.arithmetic_dynamics.affine_ds, 110
 sage.dynamics.arithmetic_dynamics.berkovich_ds, 228
 sage.dynamics.arithmetic_dynamics.dynamical_semigroup, 237
 sage.dynamics.arithmetic_dynamics.generic_ds, 103
 sage.dynamics.arithmetic_dynamics.product_projective_ds, 204
 sage.dynamics.arithmetic_dynamics.projective_ds, 121

sage.dynamics.arithmetic_dynam-
ics.wehlerK3, 207
sage.dynamics.cellular_au-
tomata.catalog, 1
sage.dynamics.cellular_au-
tomata.elementary, 1
sage.dynamics.cellular_au-
tomata.glca, 8
sage.dynamics.cellular_au-
tomata.solitons, 12
sage.dynamics.complex_dynam-
ics.mandel_julia, 29
sage.dynamics.finite_dynamical_system, 35
sage.sandpiles.sandpile, 49
multiplier() (sage.dynamics.arithmetic_dynam-
ics.affine_ds.DynamicalSystem_affine method),
116
multiplier() (sage.dynamics.arithmetic_dynam-
ics.projective_ds.DynamicalSystem_projective
method), 152
multiplier_spectra() (sage.dynamics.arith-
metic_dynamics.projective_ds.DynamicalSys-
tem_projective method), 153

N

nonsink_vertices() (sage.sandpiles.sandpile.Sand-
pile method), 67
nonspecial_divisors() (sage.sandpiles.sand-
pile.Sandpile method), 67
normal_form() (sage.dynamics.arithmetic_dynam-
ics.projective_ds.DynamicalSystem_projec-
tive_field method), 194
normalize_coordinates() (sage.dynamics.arith-
metic_dynamics.berkovich_ds.DynamicalSys-
tem_Berkovich_projective method), 235
nth_iterate() (sage.dynamics.arithmetic_dynam-
ics.affine_ds.DynamicalSystem_affine method),
116
nth_iterate() (sage.dynamics.arithmetic_dynam-
ics.dynamical_semigroup.DynamicalSemigroup
method), 243
nth_iterate() (sage.dynamics.arithmetic_dy-
namics.product_projective_ds.DynamicalSys-
tem_product_projective method), 204
nth_iterate() (sage.dynamics.arithmetic_dynam-
ics.projective_ds.DynamicalSystem_projective
method), 156
nth_iterate_map() (sage.dynamics.arithmetic_dy-
namics.affine_ds.DynamicalSystem_affine
method), 117
nth_iterate_map() (sage.dynamics.arithmetic_dy-
namics.product_projective_ds.DynamicalSys-
tem_product_projective method), 205

nth_iterate_map() (sage.dynamics.arithmetic_dy-
namics.projective_ds.DynamicalSystem_projec-
tive method), 158
nth_iterate_phi() (sage.dynamics.arithmetic_dy-
namics.wehlerK3.WehlerK3Surface_ring
method), 221
nth_iterate_psi() (sage.dynamics.arithmetic_dy-
namics.wehlerK3.WehlerK3Surface_ring
method), 222
nth_preimage_tree() (sage.dynamics.arith-
metic_dynamics.projective_ds.DynamicalSys-
tem_projective method), 159

O

orbit() (sage.dynamics.arithmetic_dynam-
ics.affine_ds.DynamicalSystem_affine method),
118
orbit() (sage.dynamics.arithmetic_dynamics.dynam-
ical_semigroup.DynamicalSemigroup method),
244
orbit() (sage.dynamics.arithmetic_dynamics.prod-
uct_projective_ds.DynamicalSystem_prod-
uct_projective method), 206
orbit() (sage.dynamics.arithmetic_dynamics.projec-
tive_ds.DynamicalSystem_projective method),
160
orbit() (sage.dynamics.finite_dynamical_system.Dis-
creteDynamicalSystem method), 41
orbit() (sage.dynamics.finite_dynamical_system.Invert-
ibleDiscreteDynamicalSystem method), 45
orbit_lengths() (sage.dynamics.finite_dynam-
ical_system.InvertibleFiniteDynamicalSystem
method), 47
orbit_phi() (sage.dynamics.arithmetic_dy-
namics.wehlerK3.WehlerK3Surface_ring method),
223
orbit_psi() (sage.dynamics.arithmetic_dy-
namics.wehlerK3.WehlerK3Surface_ring method),
223
orbit_structure() (sage.dynamics.arithmetic_dy-
namics.affine_ds.DynamicalSystem_affine_fi-
nite_field method), 121
orbit_structure() (sage.dynamics.arithmetic_dy-
namics.projective_ds.DynamicalSystem_projec-
tive_finite_field method), 202
orbits() (sage.dynamics.finite_dynamical_system.In-
vertibleFiniteDynamicalSystem method), 47
order() (sage.sandpiles.sandpile.SandpileConfig
method), 81
out_degree() (sage.sandpiles.sandpile.Sandpile
method), 67

P

parallel_firing_graph() (in module sage.sand-

`piles.sandpile), 99`
`partition_sandpile() (in module sage.sandpiles.sandpile), 99`
`periodic_points() (sage.dynamics.arithmetic_dynamics.projective_ds.DynamicalSystem_projective method), 161`
`PeriodicSolitonCellularAutomata (class in sage.dynamics.cellular_automata.solitons), 12`
`phi() (sage.dynamics.arithmetic_dynamics.wehlerK3.WehlerK3Surface_ring method), 224`
`picard_representatives() (sage.sandpiles.sandpile.Sandpile method), 68`
`plot() (sage.dynamics.cellular_automata.elementary.ElementaryCellularAutomata method), 7`
`plot() (sage.dynamics.cellular_automata.glca.GraftalLaceCellularAutomata method), 11`
`points() (sage.sandpiles.sandpile.Sandpile method), 68`
`polytope() (sage.sandpiles.sandpile.SandpileDivisor method), 90`
`polytope_integer_pts() (sage.sandpiles.sandpile.SandpileDivisor method), 91`
`possible_periods() (sage.dynamics.arithmetic_dynamics.projective_ds.DynamicalSystem_projective method), 165`
`possible_periods() (sage.dynamics.arithmetic_dynamics.projective_ds.DynamicalSystem_projective_finite_field method), 203`
`postcritical_set() (sage.dynamics.arithmetic_dynamics.projective_ds.DynamicalSystem_projective method), 166`
`postulation() (sage.sandpiles.sandpile.Sandpile method), 68`
`potential_good_reduction() (sage.dynamics.arithmetic_dynamics.projective_ds.DynamicalSystem_projective_field method), 195`
`preperiodic_points() (sage.dynamics.arithmetic_dynamics.projective_ds.DynamicalSystem_projective method), 167`
`primes_of_bad_reduction() (sage.dynamics.arithmetic_dynamics.projective_ds.DynamicalSystem_projective method), 170`
`print_state() (sage.dynamics.cellular_automata.elementary.ElementaryCellularAutomata method), 7`
`print_state() (sage.dynamics.cellular_automata.solitons.SolitonCellularAutomata method), 23`
`print_state_evolution() (sage.dynamics.cellular_automata.solitons.SolitonCellularAutomata method), 23`
`print_states() (sage.dynamics.cellular_automata.elementary.ElementaryCellularAutomata method), 8`
`print_states() (sage.dynamics.cellular_automata.glca.GraftalLaceCellularAutomata method), 11`
`print_states() (sage.dynamics.cellular_automata.solitons.SolitonCellularAutomata method), 24`
`psi() (sage.dynamics.arithmetic_dynamics.wehlerK3.WehlerK3Surface_ring method), 224`

Q

`q_reduced() (sage.sandpiles.sandpile.SandpileDivisor method), 91`
`Qxa() (sage.dynamics.arithmetic_dynamics.wehlerK3.WehlerK3Surface_ring method), 210`
`Qyb() (sage.dynamics.arithmetic_dynamics.wehlerK3.WehlerK3Surface_ring method), 211`

R

`Ramification_poly() (sage.dynamics.arithmetic_dynamics.wehlerK3.WehlerK3Surface_ring method), 211`
`ramification_type() (sage.dynamics.arithmetic_dynamics.projective_ds.DynamicalSystem_projective method), 171`
`random_WehlerK3Surface() (in module sage.dynamics.arithmetic_dynamics.wehlerK3), 227`
`rank() (sage.sandpiles.sandpile.SandpileDivisor method), 91`
`rational_preperiodic_graph() (sage.dynamics.arithmetic_dynamics.projective_ds.DynamicalSystem_projective_field method), 197`
`recurrents() (sage.sandpiles.sandpile.Sandpile method), 69`
`reduce_base_field() (sage.dynamics.arithmetic_dynamics.affine_ds.DynamicalSystem_affine_field method), 119`
`reduce_base_field() (sage.dynamics.arithmetic_dynamics.projective_ds.DynamicalSystem_projective method), 198`
`reduced_form() (sage.dynamics.arithmetic_dynamics.projective_ds.DynamicalSystem_projective method), 172`
`reduced_laplacian() (sage.sandpiles.sandpile.Sandpile method), 69`
`reorder_vertices() (sage.sandpiles.sandpile.Sandpile method), 70`
`reset() (sage.dynamics.cellular_automata.solitons.SolitonCellularAutomata method), 27`
`resolution() (sage.sandpiles.sandpile.Sandpile method), 70`

resultant() (*sage.dynamics.arithmetic_dynamics.berkovich_ds.DynamicalSystem_Berkovich_projective method*), 236
resultant() (*sage.dynamics.arithmetic_dynamics.projective_ds.DynamicalSystem_projective method*), 176
ring() (*sage.sandpiles.sandpile.Sandpile method*), 70

S

sage.dynamics.arithmetic_dynamics.affine_ds module, 110
sage.dynamics.arithmetic_dynamics.berkovich_ds module, 228
sage.dynamics.arithmetic_dynamics.dynamical_semigroup module, 237
sage.dynamics.arithmetic_dynamics.generic_ds module, 103
sage.dynamics.arithmetic_dynamics.product_projective_ds module, 204
sage.dynamics.arithmetic_dynamics.projective_ds module, 121
sage.dynamics.arithmetic_dynamics.wehlerK3 module, 207
sage.dynamics.cellular_automata.catalog module, 1
sage.dynamics.cellular_automata.elementary module, 1
sage.dynamics.cellular_automata.glca module, 8
sage.dynamics.cellular_automata.solitons module, 12
sage.dynamics.complex_dynamics.mandel_julia module, 29
sage.dynamics.finite_dynamical_system module, 35
sage.sandpiles.sandpile module, 49
sandlib() (*in module sage.sandpiles.sandpile*), 100
Sandpile (*class in sage.sandpiles.sandpile*), 54
sandpile() (*sage.sandpiles.sandpile.SandpileConfig method*), 82
sandpile() (*sage.sandpiles.sandpile.SandpileDivisor method*), 93

SandpileConfig (*class in sage.sandpiles.sandpile*), 76
SandpileDivisor (*class in sage.sandpiles.sandpile*), 84
scale_by() (*sage.dynamics.arithmetic_dynamics.berkovich_ds.DynamicalSystem_Berkovich_projective method*), 236
show() (*sage.sandpiles.sandpile.Sandpile method*), 71
show() (*sage.sandpiles.sandpile.SandpileConfig method*), 82
show() (*sage.sandpiles.sandpile.SandpileDivisor method*), 93
show3d() (*sage.sandpiles.sandpile.Sandpile method*), 71
sigma_invariants() (*sage.dynamics.arithmetic_dynamics.projective_ds.DynamicalSystem_projective method*), 176
sigmaX() (*sage.dynamics.arithmetic_dynamics.wehlerK3.WehlerK3Surface_ring method*), 225
sigmaY() (*sage.dynamics.arithmetic_dynamics.wehlerK3.WehlerK3Surface_ring method*), 226
simulate_threshold() (*sage.sandpiles.sandpile.SandpileDivisor method*), 93
sink() (*sage.sandpiles.sandpile.Sandpile method*), 71
smith_form() (*sage.sandpiles.sandpile.Sandpile method*), 72
SolitonCellularAutomata (*class in sage.dynamics.cellular_automata.solitons*), 15
solve() (*sage.sandpiles.sandpile.Sandpile method*), 72
specialization() (*sage.dynamics.arithmetic_dynamics.dynamical_semigroup.DynamicalSemigroup method*), 244
specialization() (*sage.dynamics.arithmetic_dynamics.generic_ds.DynamicalSystem method*), 109
stabilize() (*sage.sandpiles.sandpile.SandpileConfig method*), 82
stabilize() (*sage.sandpiles.sandpile.SandpileDivisor method*), 94
stable_configs() (*sage.sandpiles.sandpile.Sandpile method*), 72
state_evolution() (*sage.dynamics.cellular_automata.solitons.SolitonCellularAutomata method*), 27
stationary_density() (*sage.sandpiles.sandpile.Sandpile method*), 73
superstables() (*sage.sandpiles.sandpile.Sandpile method*), 73
support() (*sage.sandpiles.sandpile.SandpileConfig method*), 83
support() (*sage.sandpiles.sandpile.SandpileDivisor method*), 94
Sxa() (*sage.dynamics.arithmetic_dynamics.wehlerK3.WehlerK3Surface_ring method*),

212
Syb() (*sage.dynamics.arithmetic_dynamics.wehlerK3.WehlerK3Surface_ring method*), 212
symmetric_recurrents() (*sage.sandpiles.sandpile.Sandpile method*), 74

T
triangle_sandpile() (*in module sage.sandpiles.sandpile*), 100
tutte_polynomial() (*sage.sandpiles.sandpile.Sandpile method*), 75

U
unsaturated_ideal() (*sage.sandpiles.sandpile.Sandpile method*), 75
unstable() (*sage.sandpiles.sandpile.SandpileConfig method*), 83
unstable() (*sage.sandpiles.sandpile.SandpileDivisor method*), 94

V
values() (*sage.sandpiles.sandpile.SandpileConfig method*), 83
values() (*sage.sandpiles.sandpile.SandpileDivisor method*), 94
verify_inverse_evolution() (*sage.dynamics.finite_dynamical_system.InvertibleDiscreteDynamicalSystem method*), 46
version() (*sage.sandpiles.sandpile.Sandpile static method*), 75

W
WehlerK3Surface() (*in module sage.dynamics.arithmetic_dynamics.wehlerK3*), 207
WehlerK3Surface_field (*class in sage.dynamics.arithmetic_dynamics.wehlerK3*), 208
WehlerK3Surface_finite_field (*class in sage.dynamics.arithmetic_dynamics.wehlerK3*), 208
WehlerK3Surface_ring (*class in sage.dynamics.arithmetic_dynamics.wehlerK3*), 208
weierstrass_div() (*sage.sandpiles.sandpile.SandpileDivisor method*), 95
weierstrass_gap_seq() (*sage.sandpiles.sandpile.SandpileDivisor method*), 95
weierstrass_pts() (*sage.sandpiles.sandpile.SandpileDivisor method*), 96
weierstrass_rank_seq() (*sage.sandpiles.sandpile.SandpileDivisor method*), 96
weil_restriction() (*sage.dynamics.arithmetic_dynamics.affine_ds.DynamicalSystem_affine_field method*), 120

wilmes_algorithm() (*in module sage.sandpiles.sandpile*), 101

Z
zero_config() (*sage.sandpiles.sandpile.Sandpile method*), 75
zero_div() (*sage.sandpiles.sandpile.Sandpile method*), 75